
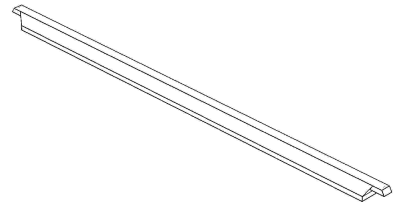



COMPONENTS

A. Concrete Top • 1pc.  
96"W x 40"D x 2.5"H


B. Teak Leg • 2pcs.  
40"W x 3.5"D x 29"H

C. Teak Lower Stretcher • 1pc.  
73"W x 2.5"D x 2.5"H

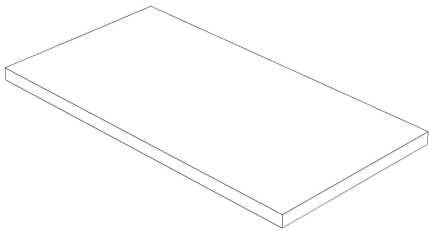

D. Stainless Steel Upper Stretcher • 2pcs.  
90"W x 1.75"D x 2.75"H

HARDWARE

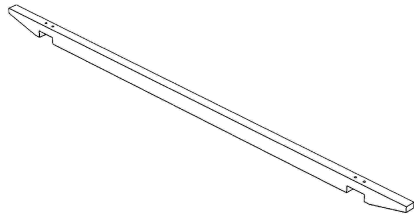

M.



55mm

X8

N.



45mm

X2

O.




X2

P.




X2

Q.



X1

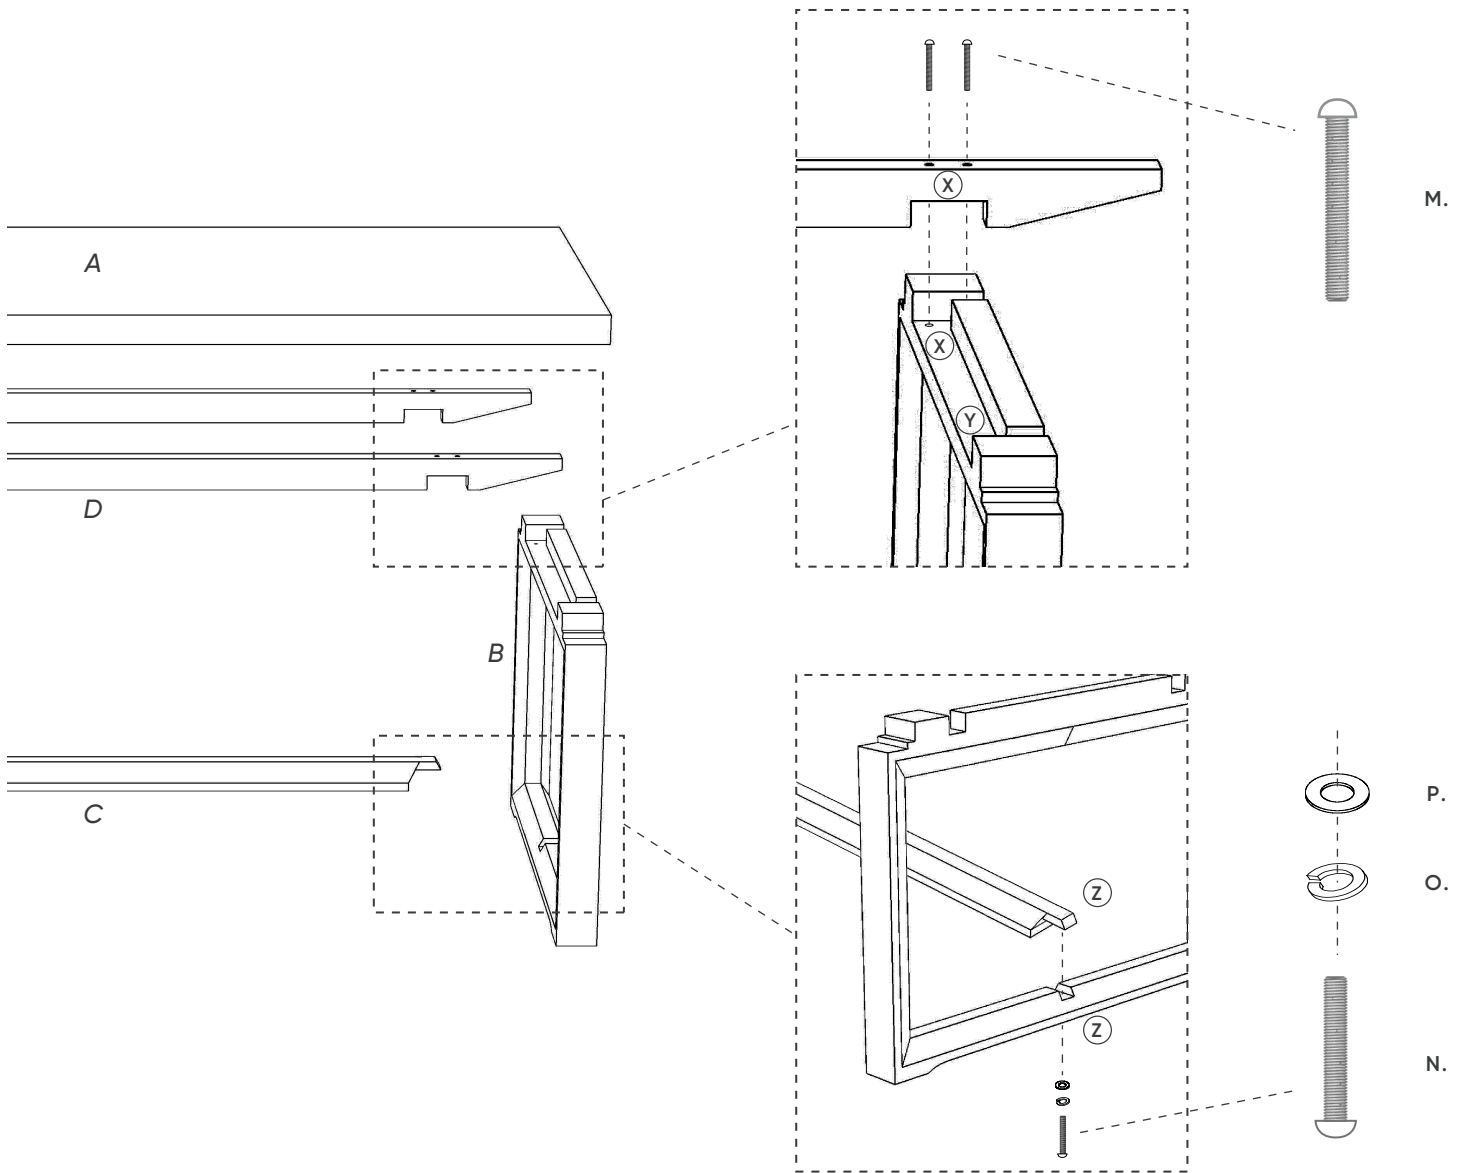

**ASSEMBLY STEPS**

1. Align the lower stretcher (C) with the designated notches on both legs (B). Make sure the screw holes line up.
2. Using the 45mm hex cap screws and the provided washers, fasten the lower stretcher (C) and the legs (B) together (2 screws total).
3. Place the two upper stretchers (D) on the top notches of the legs (B). Make sure the screw holes are aligned on both sides.
4. Using the 55mm hex cap screws, fasten the upper stretcher (D) and the legs (B) together (8 screws total).
5. Gently lower the concrete top (A) directly onto the teak base. Make sure the edges of the concrete top line up with the legs.

**PLEASE NOTE:** All of the concrete table tops we offer are very heavy. Please make sure that there are at least 3-4 people assisting when moving the table top to help prevent the risk of injury. Before assembling, be sure to rest the table top on a soft surface to help prevent the concrete from scoring or chipping.