Dual-Defence ScreenFence



Privacy Screening System

Dual-Defence ScreenFence has been designed to restrict visibility of areas requiring privacy. Dual-Defence Fence is created by fitting durable polyethylene (PE) screens to the double wire panels.

A cost-effective option, Dual-Defence ScreenFence not only looks great, but is UV stable and weatherproof for a long-lasting perimeter solution.

For technical information see overleaf.

Ideal for




Conforms to







Isometric View

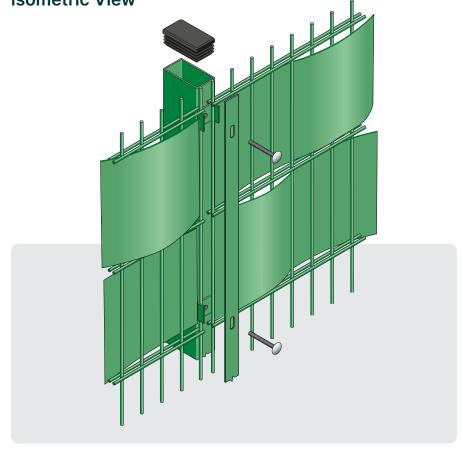



Key Features

Limits visibility

Weatherproof

Recylable materials

Dual-Defence ScreenFence





Product Technical Information

Standard: BS1722-14: 2017

BS EN ISO 1461: 2009 BS EN 13438: 2013

Panel type: Mesh, wire and polyethylene. Single vertical and double horizontal wires interwoven with PE

screens, fixed with custom made clip fixings and sturdy bolts. Mesh is galvanised and powder-

coated to minimum 60 microns.

Panel width: 2506mm

Wire diameter: 6mm verticals and 8mm horizontals

Mesh size: 200 × 50mm

Height: 630mm to 3030mm

Select as appropriate

Nominal height: 0.6 to 3m

Finish: Polyester powder-coated to minimum 60 microns.

Any RAL colour including marine grade and metallics.

Top edge projection: 30mm - can be inverted for a flush finish

Panel installation: Bottom of panel approx. 40mm above ground

Security topping

options:

Cranked or straight extensions for barbed and razor wire

Posts: RHS, galvanised after manufacture and polyester powder-coated to match fencing

Post dimensions: Size depends on height of panel and location

Maximum post

centres:

2520mm

Fixings: 60mm x 5mm full length clamp bar. M8 × 40mm stainless steel pin hex dome-head security

screws. Sheardrive™ if required instead of pin hex.

Foundations: Set posts in holes minimum 300mm diameter x 800mm deep.

Note: Contractor/ client is responsible for the foundation size suitable for the ground conditions and

height of fence

Warranty: Minimum of 15 years against manufacturing defects.