
M . M

Balloon Sconce Installation Guide

Included for installation:







1x Mounting Plate



2x 8-32 Screws



2x Wire Nuts




Hex wrench

+1 212 343 2600 mattermade.us sales@mattermade.us MATTER.MADE

Balloon Sconce Installation Guide


Steps 1 - 3



DANGER: ELECTRIC SHOCK RISK Turn off power before installing. Matter Made recommends the installation of this fixture to be completed by a licensed electrician.

- 1. Remove fixture from packaging and lay on a protected surface.
- Using the included hex wrench, loosen the set screw that secures the mounting plate to the fixture. Remove the mounting plate from the fixture.
- Attach the mounting plate to the junction box (A) using the included 8-32 screws (B).

Step 4

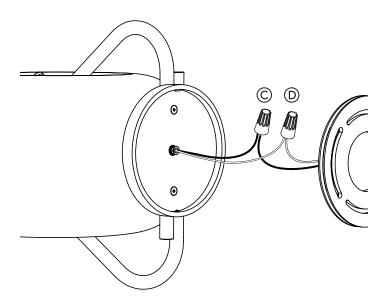


4. Using the included wire nuts, connect the black wire of the fixture (C) to the live wire of the junction box. Connect the white wire of the fixture (D) to the neutral wire of the junction box.


+1 212 343 2600 mattermade.us sales@mattermade.us MATTER.MADE

Balloon Sconce Installation Guide

Step 5

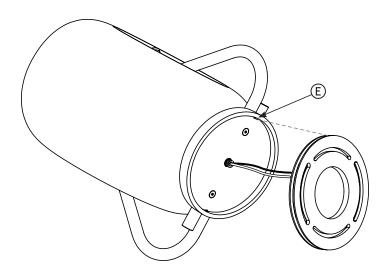

5. Tuck the connected wires into the junction box. Place fixture over the mounting plate by tilting the fixture up and nesting the small cleat (E) on the V groove on the side of the mounting plate. The fixture can be rotated around the mouting plate in order to level the sconce.

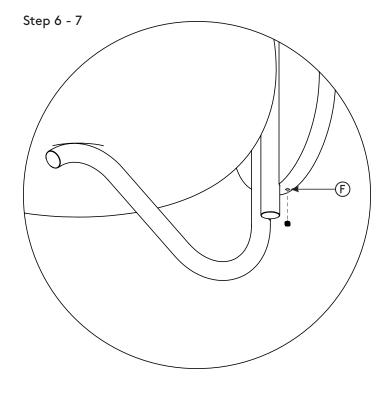


- 6. Using the included hex wrench, tighten the set screw (F) to secure the fixture to the mounting plate.
- 7. Turn on the power and test fixture switch and dimming function. Installation is now complete.


Enjoy!

Balloon Sconce Bulb Replacement Instructions

Steps 1 - 2

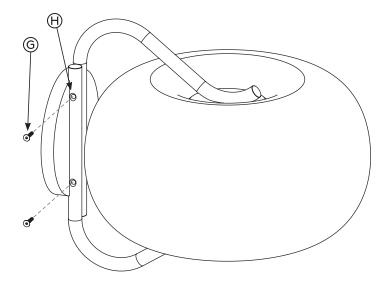

- To change the LED bulb, turn off power to the fixture.
- First remove the screws (G) on the side of the support arm (H) using the provided hex key. Gently to remove the support arm from the fixture, taking care to not scratch the finish. Set aside the screws and support arm.

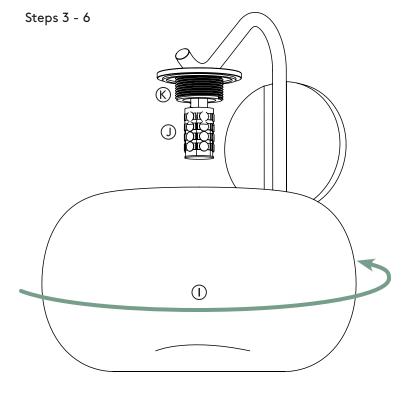

- 3. Hold the glass shade (I) from the bottom and side and gently unthread the glass counter-clockwise and set aside.
- Pull down on the bulb (J) to remove.
 Matter Made recommends replacing the
 bulb with a 5 watt G9 base LED bulb with
 a 2700K color temperature.
- 5. Thread the glass shade back onto the threaded portion (K) of the glass connector. DO NOT OVER-TIGHTEN.
- 6. Reattach he support arm (H) using the screws (G) and tighten with the provided hex key. Turn on power to the fixture.