
M . M

Legato Linear *Installation Guide*


Included for installation:

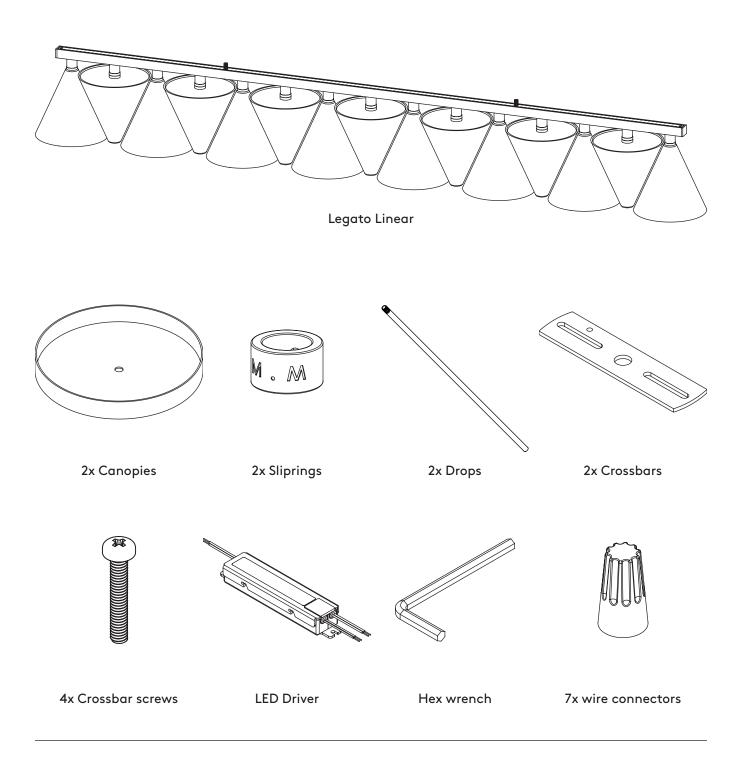


Legato Linear *Installation Guide*

Option A

A. The Legato Linear can be installed onto two junction boxes placed 26.5in center-to-center.




Option B



B. Alternately, the Legato Linear can be installed onto a single junction box with a hole drilled into the ceiling 26.5 inches center-to-center.


M . M

Legato Linear Installation Guide

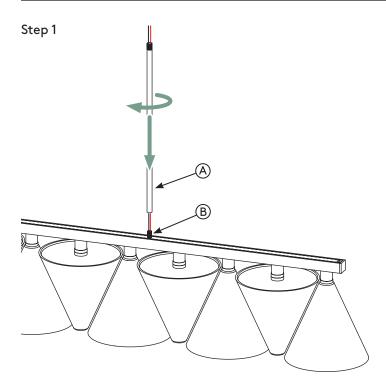

 Caution: Turn off power at the circuit breaker before beginning installation. Matter Made recommends the Legato Double Strings fixture be installed by a qualified electrician.


Remove the Legato Linear from the packaging and place it on a protected surface. Thread both drops (A) on to the threaded nipples (B). Ensure the wires exit through to the top of the drop.

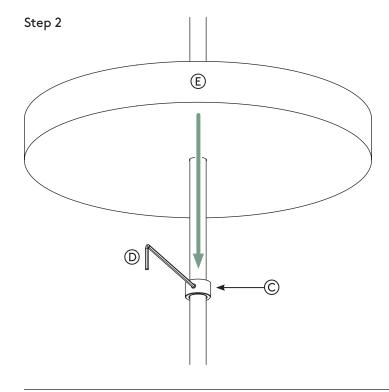

 Slide the slipring (C) down the drop roughly 12 inches from the top of the drop. Using the provided hex wrench (D), slightly tighten the slipring set screw. Slide the canopy (E) over the drop and rest it on the slip ring. Repeat this step for the other drop.


M . M

Legato Linear *Installation Guide*

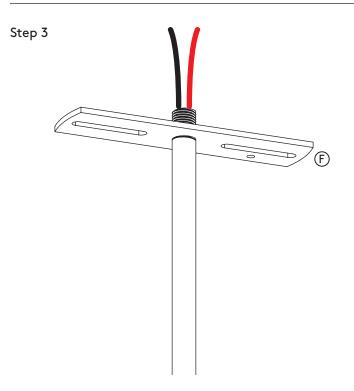

3. Thread the crossbars (F) on to the top of each drop.

Step 4

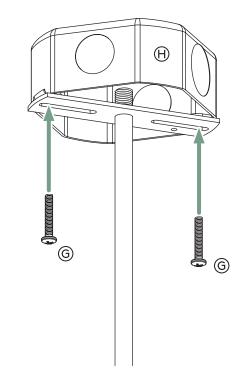


4. Lift the fixture towards the ceiling. Using the provided crossbar screws (G) attach the crossbars to the junction box (H). For installation option A, repeat this step for the second junction box. For installation option B, attach the second crossbar to the ceiling using anchors and screws appropriate for the ceiling material.

The Legato Linear can be levelled by spinning the crossbar up or down on the threaded portion of the drop.

M , M

Legato Linear *Installation Guide*

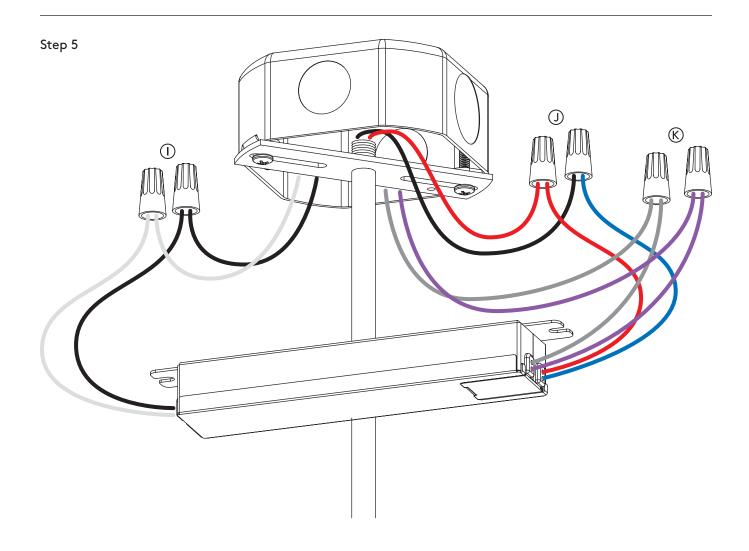


5. NOTE: Wire colors on the LED driver may vary, please refer to the LED driver label.
Wire colors may vary in your junction box, please consult an eletrician to ensure proper wiring.

Using the provided wire connectors:

- connect the live wire from the junction box to the live wire of the driver (I).
- connect the neutral wire from the junction box to the neutral wire of the driver(I).
- connect the black wire from the drop to the blue wire (LED-)of the driver (J).
- connect the red wire from the drop to the red wire (LED+) of the driver (J).
- connect the grey wire (DIM-) of the driver to the corresponding wire attached to the dimmer (K).
- connect the purple wire (DIM+) of the driver to the corresponding wire attached to the dimmer (K).

M , M

Legato Linear *Installation Guide*

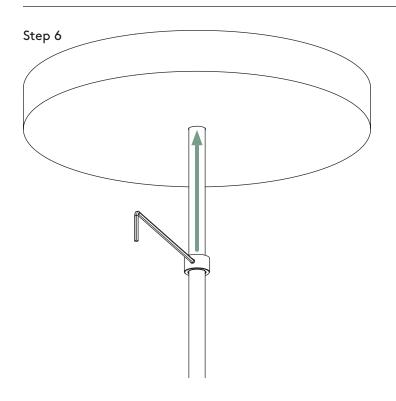

6. Tuck the LED driver and wires into the canopy and raise the canopy to the ceiling. Using the included hex wrench, loosen the slip ring set screw. Raise the slip ring towards the canopy and tighten the set screw to secure the canopy in place.

Repeat this step for the remaining canopy and slip ring.

