




Instructions Manual
English
Miyota 6P28
Analog

BATTERY: SR621SW

FEATURES: Analog Multi-Function Quartz watch with 24 Hour

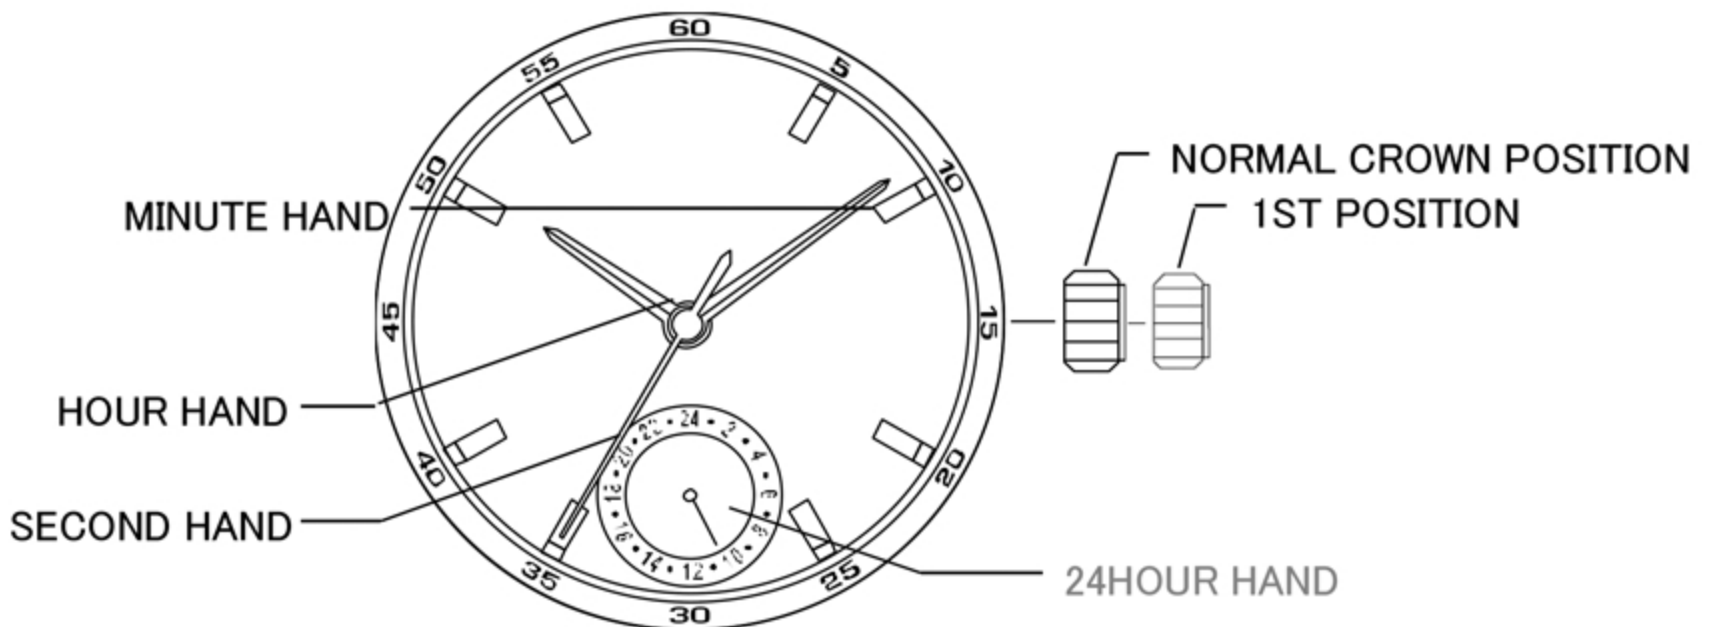

NORMAL CROWN POSITION
1ST POSITION

TIME SETTING (CLOCKWISE)

OPERATION PROCEDURE

1 SETTING THE TIME (HOUR, 24HOUR, MINUTE and SECOND)

SETTING THE TIME (HOUR, 24 HOUR, MINUTE AND SECOND)

The hour, 24 hour, minute and second are set by the same operation.

SETTING PROCEDURE

HOUR&24HOUR → **MINUTE** → **SECOND**

Pull the crown out to the 1st position to stop the second hand at 0 (12 o'clock).

Turn the hour/minute hands in a clockwise direction to set the time.

To ensure time is set accurately, first turn the minute hand 5 minutes ahead of desired time and then turn back (in a counterclockwise) to the desired time.

After setting the time, use a time signal to synchronize the watch by pushing crown to the normal position to start the second hand going.

NOTE:

Make sure you have correctly set AM/PM before setting the time.

Water Resistance

Indications		Use in water				
Watch Dial	Back of the watch case					
3 atm	W/R 3 atm	OK	NO	NO	NO	NO
5 atm	W/R 5 atm	OK	OK	NO	NO	NO
10 atm	W/R 10 atm	OK	OK	OK	NO	NO