




Tile geometry allows for consistent dome spacing to be maintained between adjoining tiles.



High density, diamond grip™ pyramid micro texture designed for exceptional slip resistance in wet and dry conditions.

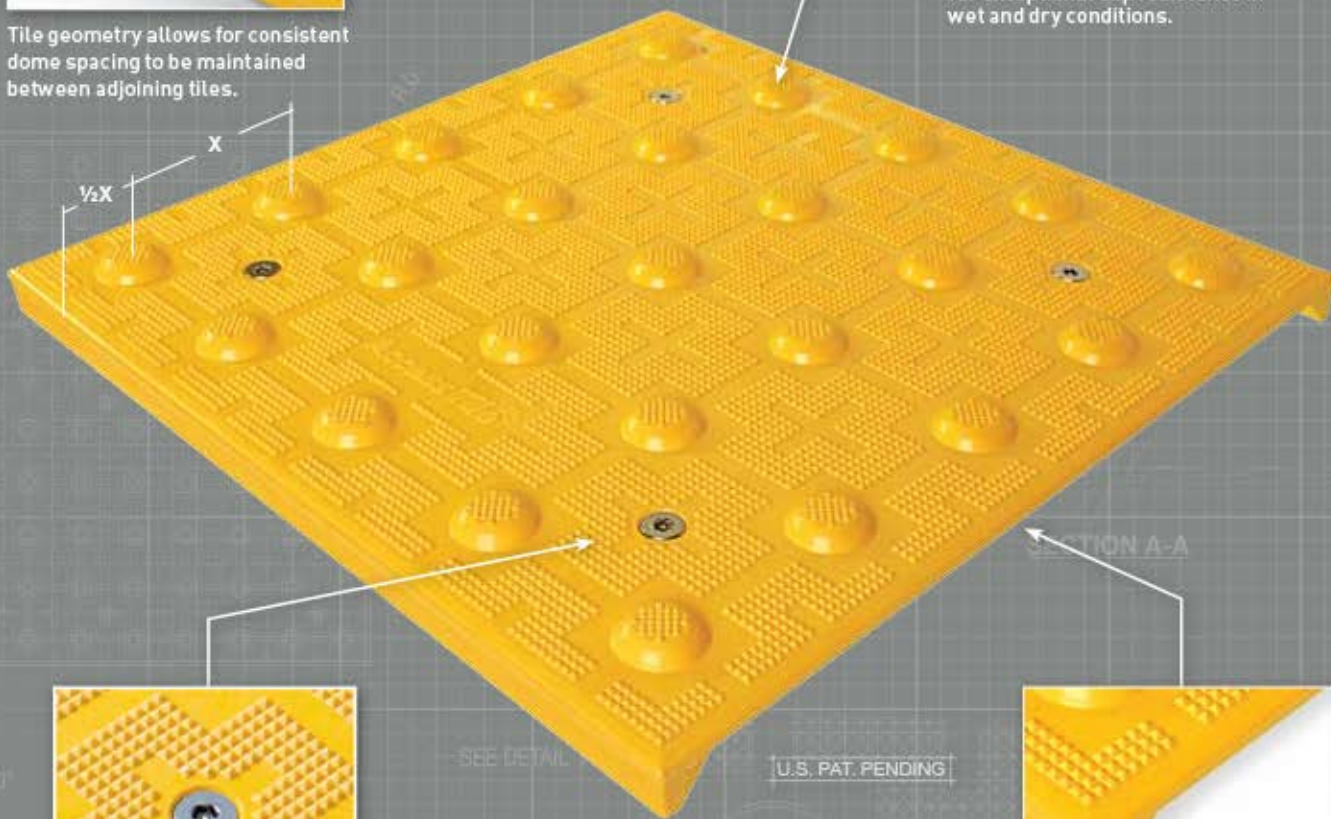

Tamper-proof, countersunk, stainless steel fastener sets flush with tile surface and provides for future replaceability.



Open end design eliminates air entrapment during installation to ensure full interface with concrete substructure.

36.00"
PLAN