# Junction Block for Field-Wiring
# ZP-JBH45-00-FW

**Cable Gland**

**Terminal Block**

**M3 Screw**

## Assembly and Operating Instructions

1.) Strip cable jacket 2"
2.) Strip conductors 0.2"
3.) Pass cable through Cable Gland. If cable is too big to fit through cable gland, remove inner grommet within cable gland and use only outer grommet. (See acceptable diameters below)
4.) Insert wires into terminal blocks by pushing button and inserting stripped wire, then release button. Wire according to schematic on back of main block.
5.) Assemble backshell to main housing by tightening the M3 screws (20 lbf-in [2.3Nm])
6.) Tighten Cable Gland dome nut (24 lbf-in [2.7Nm])

*Note: Not for current interrupting*

## Wiring

V(+) GND V(−) SIGNAL 2 SIGNAL 1

### Pin Out Table
#### ZP-JBH45-00-FW

| Port and Pin | Terminal Block |
|---|---|
| Port 1 -4 Pin 1 | J1 / V+ |
| Port 1-4 Pin 3 | J1 / V- |
| Port 1-4 Pin 5 | J1 / Ground |
| Port 1 Pin 2 | J3 / 1 |
| Port 1 Pin 4 | J2 / 1 |
| Port 2 Pin 2 | J3 / 2 |
| Port 2 Pin 4 | J2 / 2 |
| Port 3 Pin 2 | J3 / 3 |
| Port 3 Pin 4 | J2 / 3 |
| Port 4 Pin 2 | J3 / 4 |
| Port 4 Pin 4 | J2 / 4 |

## Cable Sizes and Types

Cable must be USR/CNR R/C AWM or USR R/C AWM CSA Certified

PUR (20233) & PVC (2661, 2517, 2587, 21098): 18/3, 22/8 combination AWG cable.
SJE, SJT, SE, ST 18AWG (Cord must be UL/cUL Listed or UL Listed and CSA Certified)

All cables must have stranded copper conductors and are suitable for use with the minimum and maximum cable diameters per cable jacket material type indicated below.

## Cable Diameters

With inner grommet intact
(max OD 7.9mm):

PUR - 0.19" [4.8 mm] min.
PVC - 0.17" [4.3mm] min.

With inner grommet removed
(max OD 12.5 mm):

PUR - 0.28" [7.2 mm] min.
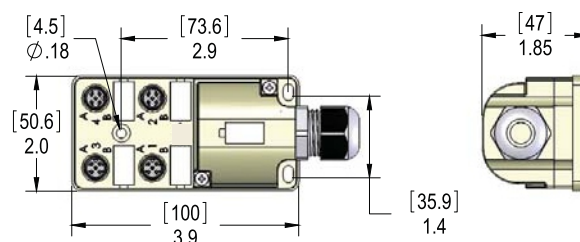PVC - 0.28" [7.2 mm] min.
SJT/SJE/ST/SE - 0.305" [7.75 mm] min.

## Dimensions

[4.5] ⌀.18
[73.6] 2.9
[50.6] 2.0
[100] 3.9
[47] 1.85
[35.9] 1.4

*Dimensions in inches [millimeters]*

## Volts / Amps

150 VAC/DC max / 8A for entire block, 3A max. for any one port. Voltage cannot exceed the voltage rating of the cable being used.