

**TRUClose** The world's most trusted safety gate hinges



	PRODUCT CODE	TRIM COVER OPTIONS	GATE MATERIAL	IDEAL GATE GAP	GAP VARIANCE	MAXIMUM SELF-CLOSING WEIGHT*	ALIGNMENT LEGS
TRUCLOSE REGULAR RANGE	TCA1S3	Black, Brushed, Chrome, White	Metal	3/4" 19mm	1 1/32" - 7/8" 9-22mm	66 lb 30kg	Optional
	TCA2S3	Black, Brushed, Chrome	Metal to Wood	3/4" 19mm	1 1/32" - 7/8" 9-22mm	66 lb 30kg	Optional
	TCA3S3	Black, Brushed, Chrome, White	Wood, Vinyl	3/4" 19mm	1 1/32" - 7/8" 9-22mm	66 lb 30kg	Optional
	TCA4	NA	Wood	3/4" 19mm	5/16" - 7/8" 8-22mm	55 lb 25kg	No
	TCAV1	NA	Round post to Glass	3/4" 19mm	7/8" - 1 1/2" 22-38mm	55 lb 25kg	Yes
	TCAMA1/2	NA	Metal, Wood, Vinyl	1 3/8" 35mm	7/8" - 2" 22-50mm	55 lb 25kg	Yes
	TCAMA2RND	NA	Chainlink	1 3/8" 35mm	7/8" - 2" 22-50mm	55 lb 25kg	Yes
TRUCLOSE HEAVY DUTY RANGE	TCHD1AS3	Black, Brushed, Chrome, White	Metal	3/4" 19mm	1 1/32" - 1" 9-25mm	154 lb 70kg	Optional
	TCHD1S3	Black, Brushed, Chrome	Metal, Wood, Vinyl	3/4" 19mm	1 1/32" - 1" 9-25mm	154 lb 70kg	Optional
	TCHD2L1SS3	Black, Brushed, Chrome, White	Wood, Vinyl	3/4" 19mm	1 1/32" - 1" 9-25mm	154 lb 70kg	Yes
	TCHD2L2S3	Black, Brushed, Chrome, White	Wood, Vinyl	3/4" 19mm	Fixed at 1 3/16" 21mm	154 lb 70kg	Yes
	TCHDMA1	NA	Metal, Wood, Vinyl	1" 25mm	5/8" - 1 3/8" 16-35mm	132 lb 60kg	Yes
TCHDRND1/2	NA	Chainlink	1" 25mm	3/4" - 1 3/8" 19-35mm	132 lb 60kg	Yes	


\*Ratings are based upon two hinges on a maximum gate size of:  
Regular hinges: 5'H x 3'W (1500mmH x 900mmW) Heavy Duty hinges: 6'H x 4'W (1800mmH x 1200mmW)

**KWIKFIT** Versatile, General-Purpose Gate Hinges



	PRODUCT CODE	GATE MATERIAL	IDEAL GATE GAP	MAXIMUM SELF-CLOSING WEIGHT*	HINGE MATERIAL	COLOR OPTIONS
KWIKFIT ALUMINIUM	KF3 Alignment ridges, self-closing	Metal	Fixed at 1/2" 13mm	44 lb/20kg	Aluminum	Black, Bronze, White
	KF3L2 2 side fixing legs, self-closing	Metal	Fixed at 1/2" 13mm	44 lb/20kg	Aluminum	Black, Bronze, White
	KF3A Wall or post mount, self-closing	Metal	Fixed at 3/4" 19mm	44 lb/20kg	Aluminum	Black, Bronze, White
	KF31ABL Wall or post mount, self-closing	Metal, Wood, Brick	Fixed at .85" 21.5mm	44 lb/20kg	Aluminum	Black
KWIKFIT	KFP No spring, non-self-closing	Metal, Wood, Vinyl	Fixed at 3/4" 19mm	Plain Pivot No spring	Polymer	Black
	KFS Fixed tension, self-closing	Metal, Wood, Vinyl	Fixed at 3/4" 19mm	44 lb/20kg	Polymer	Black

**SUREClose** Hydraulic Gate Closers & Hinges

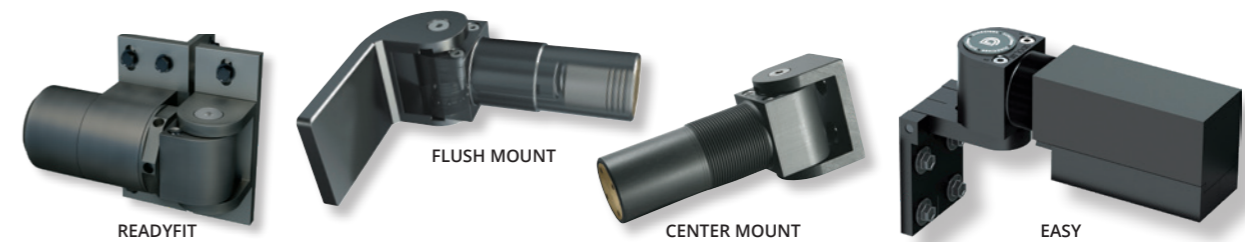

	MODEL	INCLUDES HINGES	EXTERNAL OR INTERNAL MOUNT	FLUSH OR CENTER MOUNTED	MOUNTING BRACKETS	FIXING METHOD	MAXIMUM SELF-CLOSING WEIGHT*
SURECLOSE	READYFIT	Yes	External	Flush	Aluminum or Steel	Screw-on or Weld-on	260 lb (120kg)
	FLUSH MOUNT	Yes**	Internal	Flush	Aluminum or Steel	Screw-on or Weld-on	260 lb (120kg)
	CENTER MOUNT	Yes**	Internal	Center	Aluminum or Steel	Screw-on or Weld-on	260 lb (120kg)
	EASY	No	External	Center	Aluminum	Screw-on	180 lb (80kg)

\*CAUTION: Based on max gate size 72"H x 40"W (1800x1000mm).  
For gates with greater HxW, or if conditions such as wind play a role, use hinge combinations with higher self-closing weight ratings.  
\*\*Post mounting brackets sold separately. No fasteners included.