




App User Manual

Table of Contents

1.	Download App	3
2.	Registration/Login/Password Retrieval	4
3.	How to Use the App	
3.1	Family/Member Management	10
3.2	Adding Devices - All Devices	13
4.	Control Devices	
4.1	Control Devices - Individual Control	25
4.2	Control Devices - Group Control	27
5.	Smart Features Settings	
5.1	Automation Settings	29
5.2	Scene Settings	32
5.3	Add/Modify/Delete	33
6.	My Home	35
7.	"Me" Page	36

NO.1 Download App

Search and download “Smartlife” in App Store or Google Play.

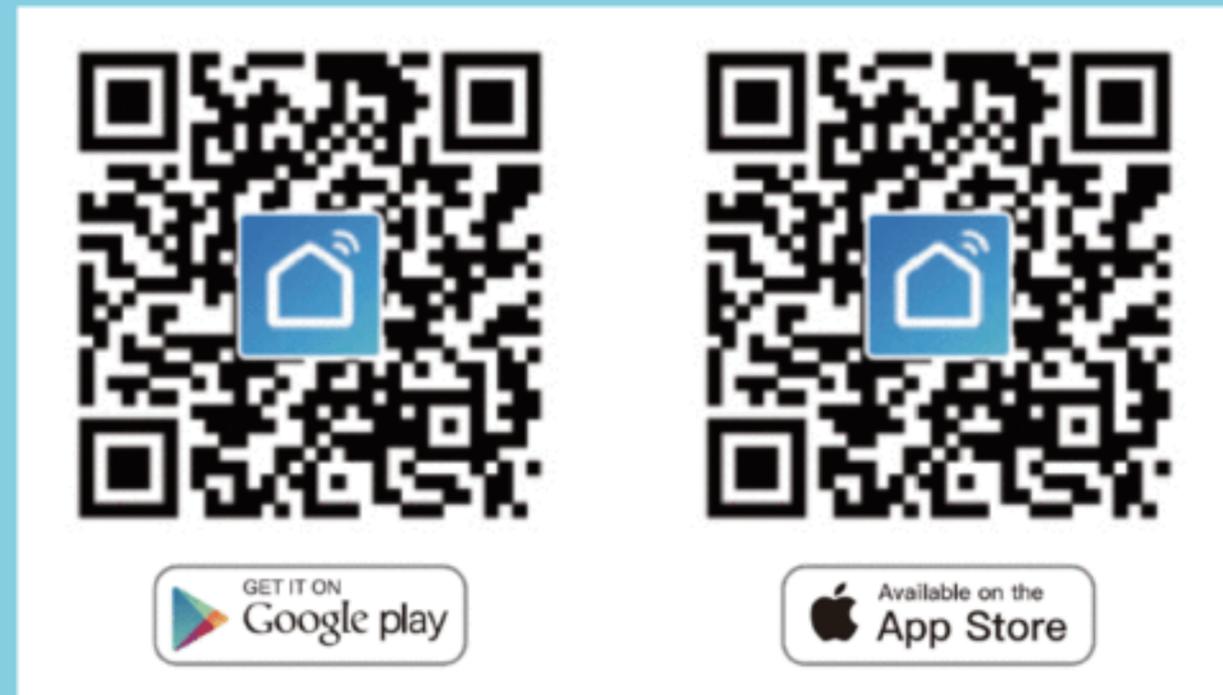

NO.2 Registration/Login/Password Retrieval

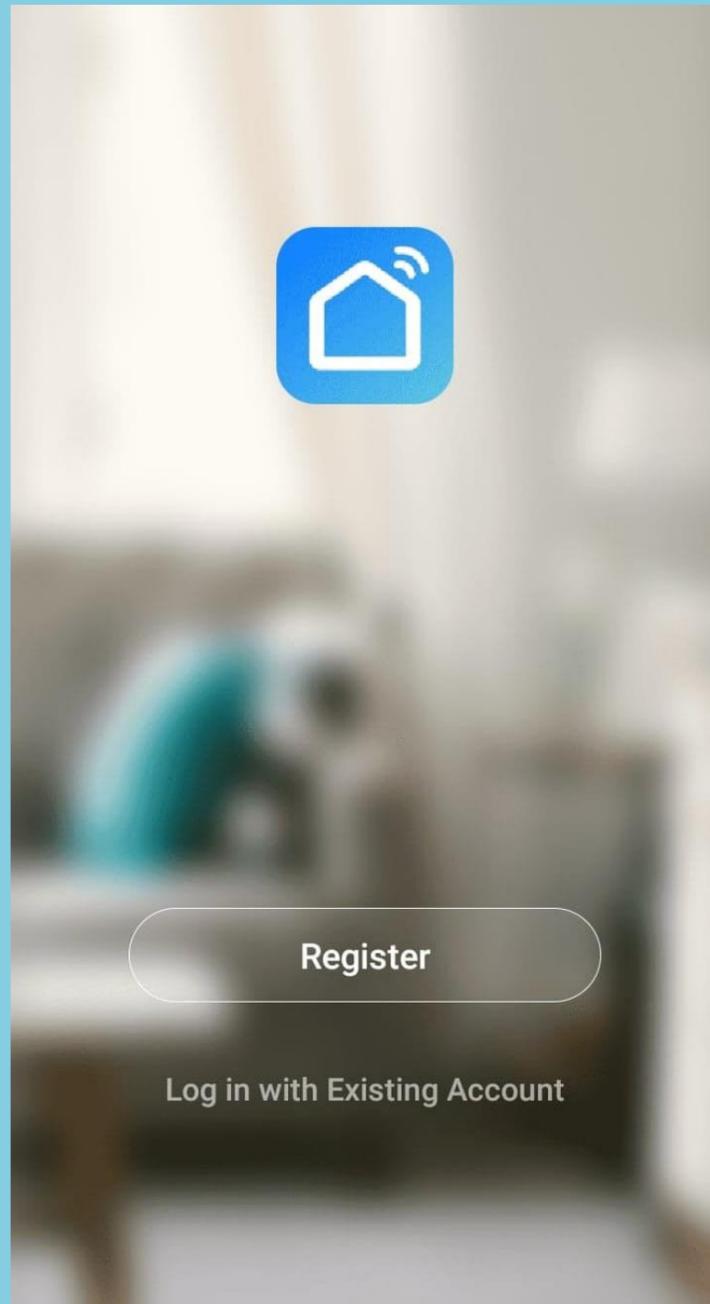


Fig. 1

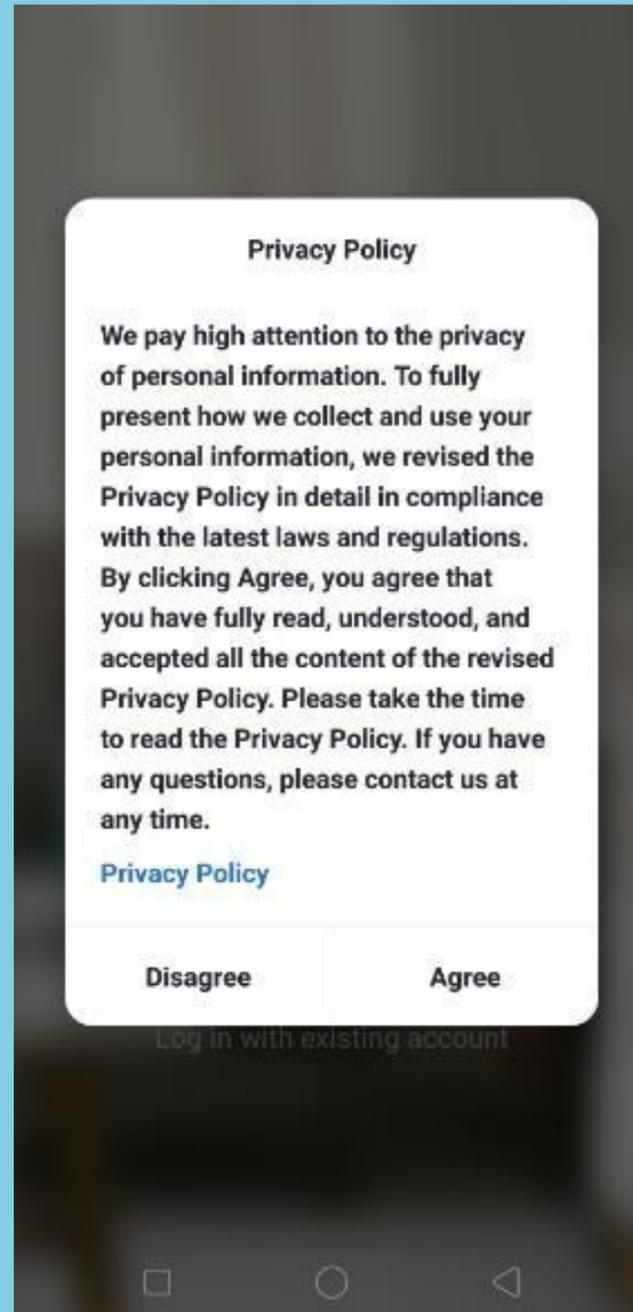


Fig. 2

Registration

If you do not have an app account, you may choose to register or log in by authentication code. The registration process is described on this page and the next.

1. Click "Register" to go to the Smart Life privacy policy page. Click "Agree" to proceed to the registration page

NO.2 Registration/Login/Password Retrieval

← Register by Phone

Register by email

Singapore +65 >

Email

Obtain verification code

I agree [Service Agreement](#) and [Privacy Policy](#)

Fig. 1

←

Enter verification code

Verification code has been sent to your phone:
86-18827050052, Resend(57s)

Fig. 2

←

Set Password

6-20 characters, including letters and numbers

Completed

Fig. 3

2. The system will identify automatically the country/region you are in, or you may choose to select manually a country/region. Enter your mobile phone number or email and click "Get authentication code", as shown in Fig. 1
3. Enter the authentication code you received. Then enter the password and click "Completed" to complete registration.

NO.2 Registration/Login/Password Retrieval

←

Log in

Singapore +65 >

Mobile number/e-mail address

Password

Log in

Authentication code login

Forgot Password


I agree [Service Agreement](#) and [Privacy Policy](#)

Account ID + Password Login

If you already have an app account, click "Log in with existing account" to proceed to the login page


1. The system will identify automatically the country/region you are in, or you may also choose to select manually a country/region
2. Enter the mobile phone number or email you have registered and enter the password in to log in

NO.2 Registration/Login/Password Retrieval

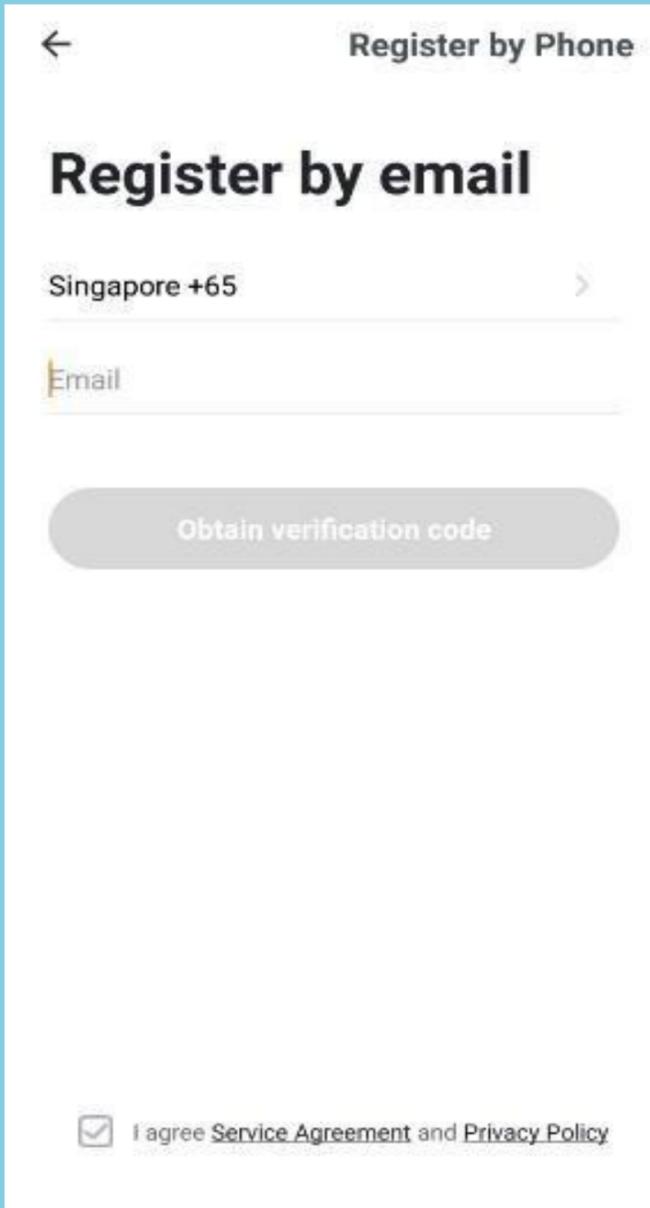


The screenshot shows a mobile application interface titled "Register by Phone". The main heading is "Register by email". Below the heading, there is a dropdown menu for the country code, currently set to "Singapore +65". Underneath is a text input field labeled "Email". A large, rounded button labeled "Obtain verification code" is positioned below the input field. At the bottom left, there is a checkbox with the text "I agree Service Agreement and Privacy Policy".

Fig. 1

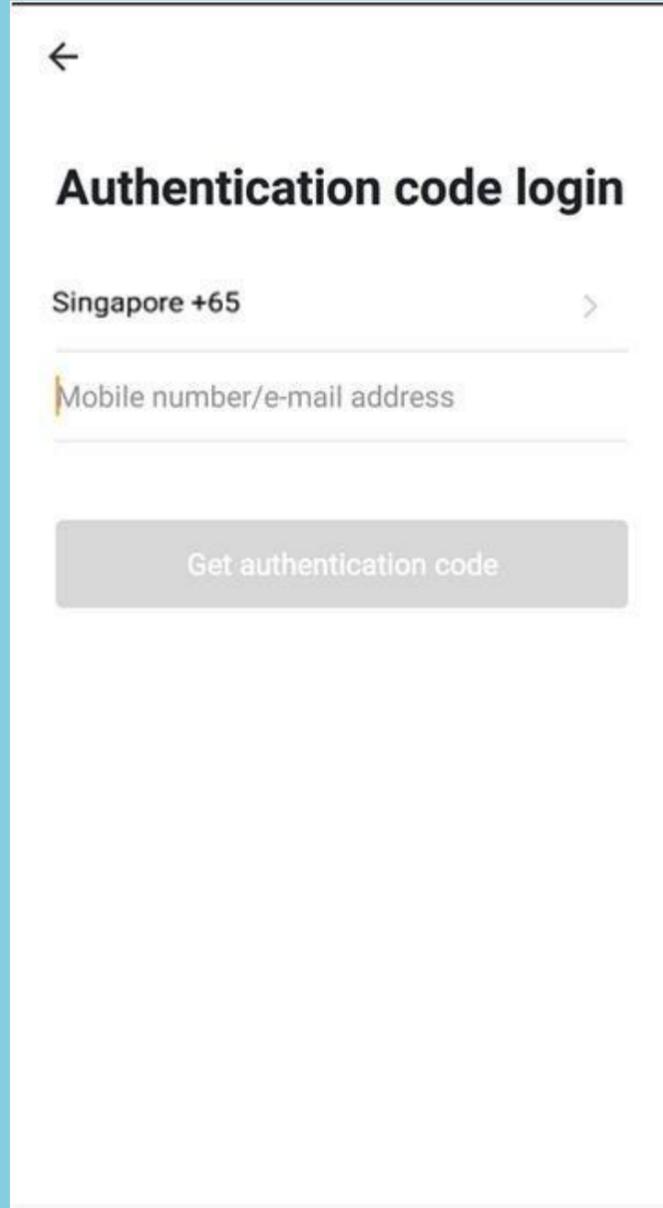

The screenshot shows a mobile application interface titled "Authentication code login". Below the heading, there is a dropdown menu for the country code, currently set to "Singapore +65". Underneath is a text input field labeled "Mobile number/e-mail address". A large, rounded button labeled "Get authentication code" is positioned below the input field.

Fig. 2

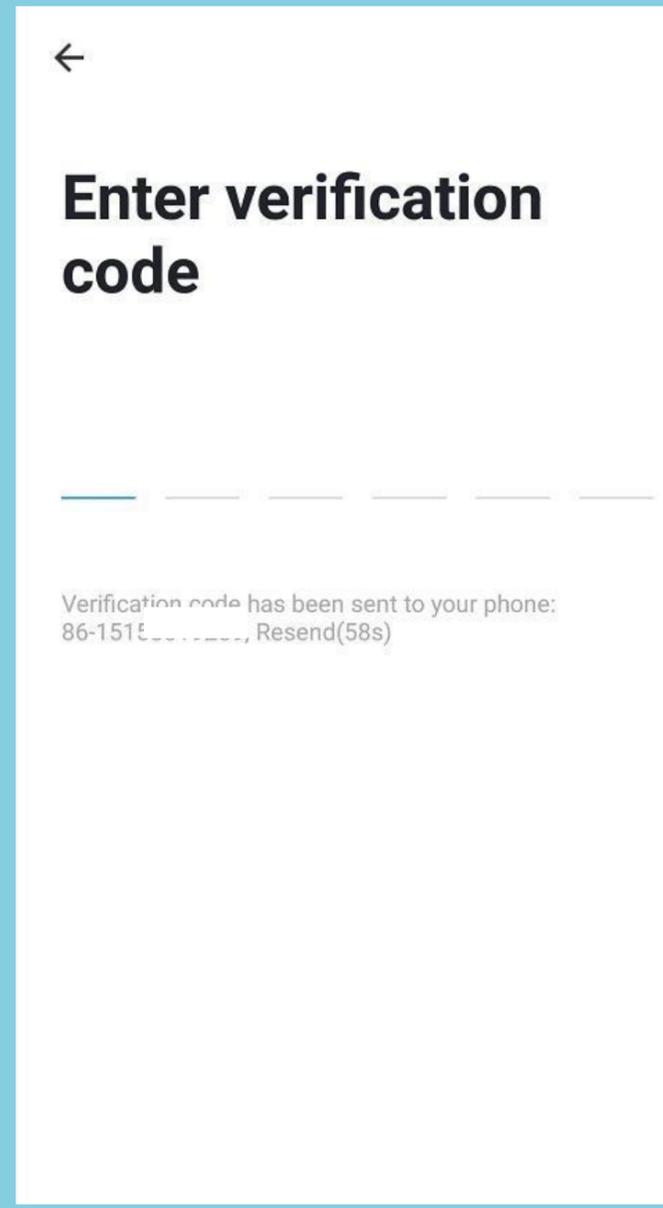

The screenshot shows a mobile application interface titled "Enter verification code". Below the heading, there is a dashed line indicating where to enter the code. Below the dashed line, there is a text message: "Verification code has been sent to your phone: 86-1515..., Resend(58s)".

Fig. 3

Authentication Code Login

1. Click "Authentication code login" in Fig. 1 to go to the next page.
2. The system will identify automatically the country/region you are in, or you may also choose to select manually a country/region
3. Enter your mobile phone number or email and click "Get authentication code", as shown in Fig. 2
4. Enter the authentication code in the text message or email to login, as shown in Fig. 3

NO.2 Registration/Login/Password Retrieval

←

Log in

Singapore +65 >

Mobile number/e-mail address

Password

Log in

Authentication code login

Forgot Password

I agree [Service Agreement](#) and [Privacy Policy](#)

Fig. 1

←

Forgot Password

Singapore +65 >

Mobile number/e-mail address

Get authentication code

Fig. 2

Forgot Password

If you forgot your app password, you can reset your password by following the Password Retrieval procedure

1. Click "Forgot Password", as shown in Fig. 1
2. The system will identify automatically the country/region you are in, or you may choose to select manually a country/region. Enter the mobile phone number or email you used to register and click "Get authentication code", as shown in Fig. 2

NO.2 Registration/Login/Password Retrieval

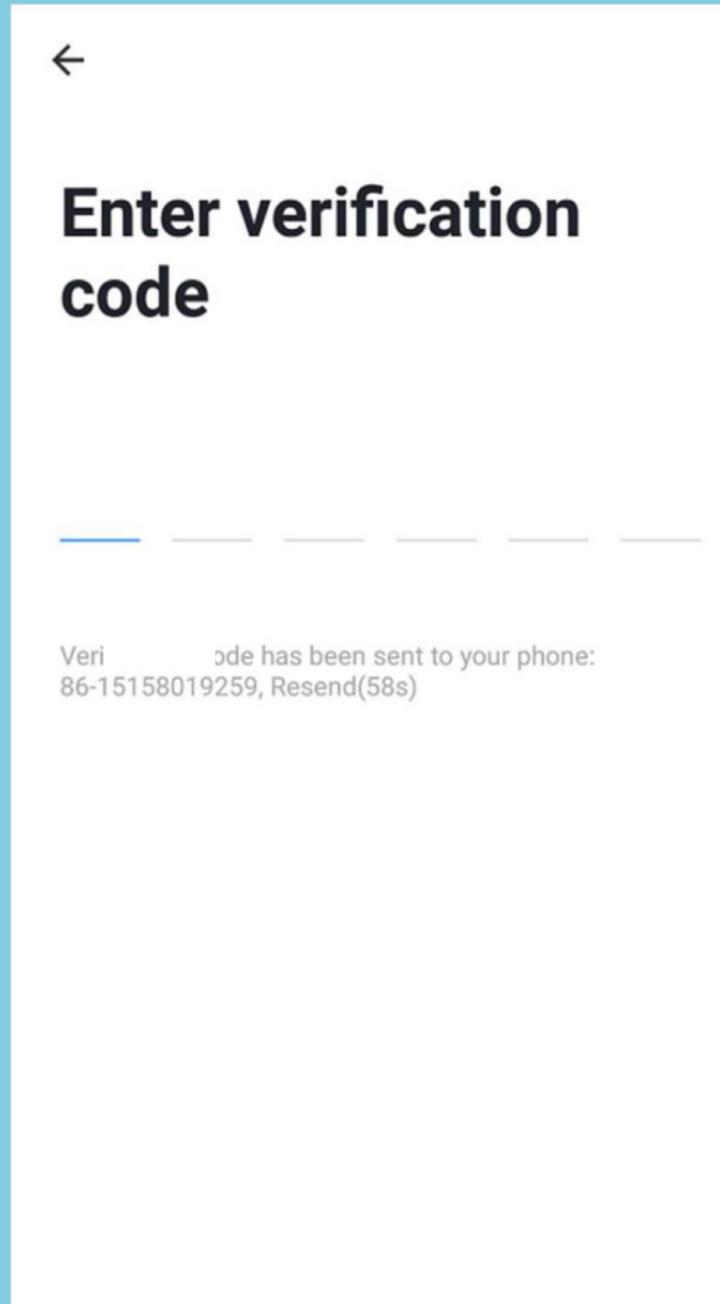


Fig. 3

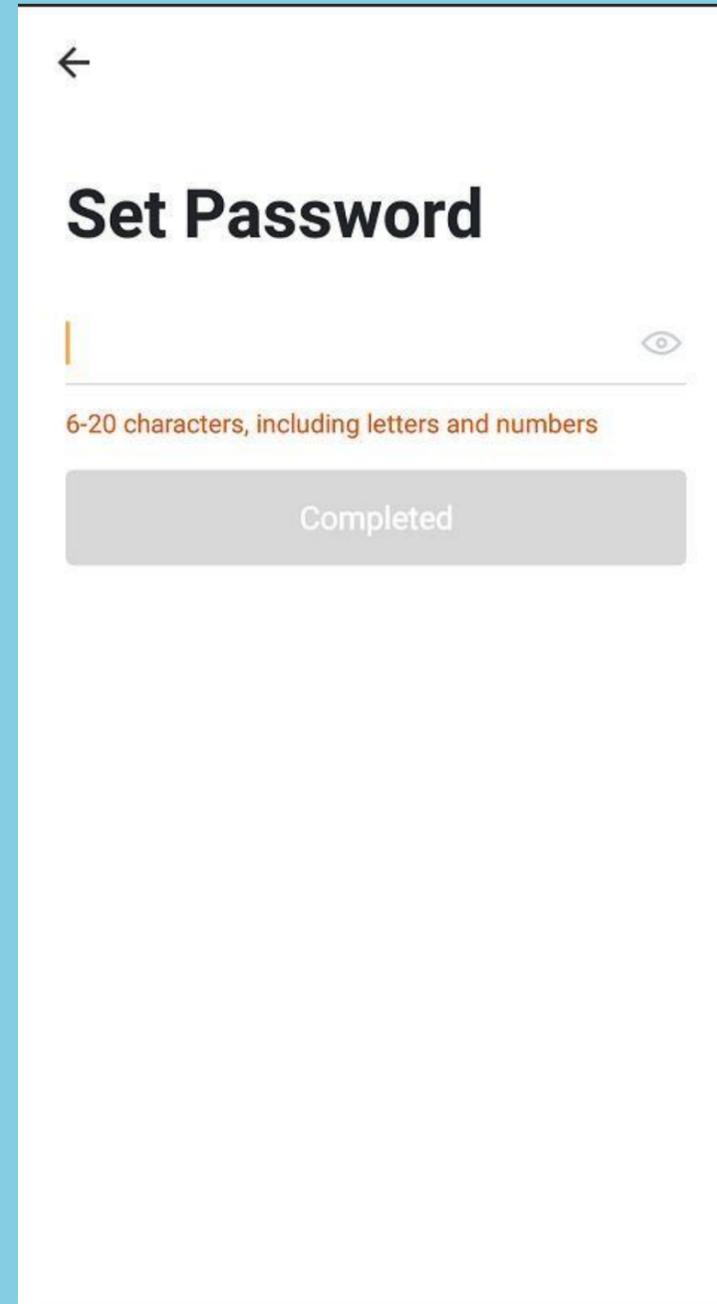


Fig. 4

3. Enter the authentication code sent to your mobile phone number or email, as shown in Fig. 3
4. Enter the new password and click "Completed" to log in, as shown in Fig. 4

NO.3.1 Family/Member Management

1. When logged in, click “Create family” to go to the “Add family” page, as shown in Fig. 1
2. “Family Name” can be entered manually, as necessary. Click “Set geographic location” to go to the map. Move the icon manually to change the address. Click “CONFIRM” to confirm the address, as shown in Fig. 2.
3. Click “Add another room” to add a room, as shown in Fig. 3. Click “Completed” at the top right corner to complete room settings. Room settings can be changed anytime by clicking on “My Home”, as shown in Fig. 4.

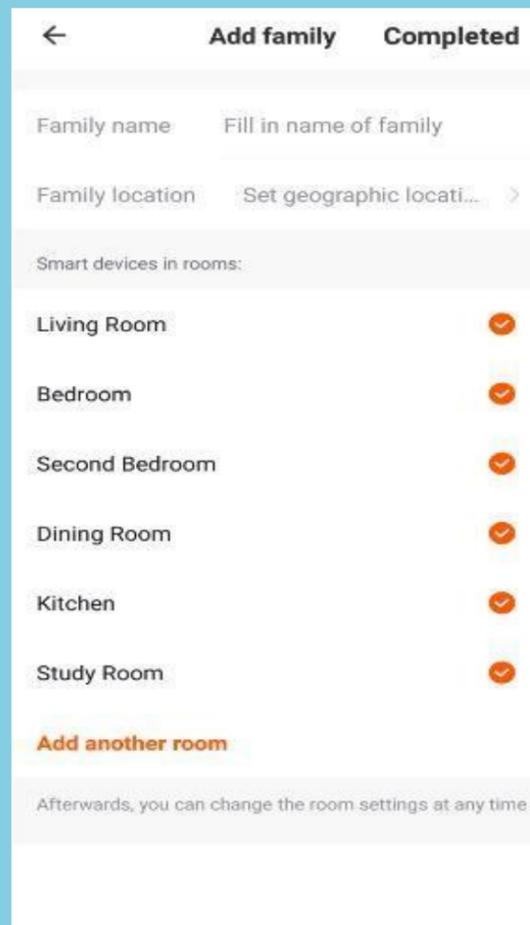


Fig. 1



Fig. 2

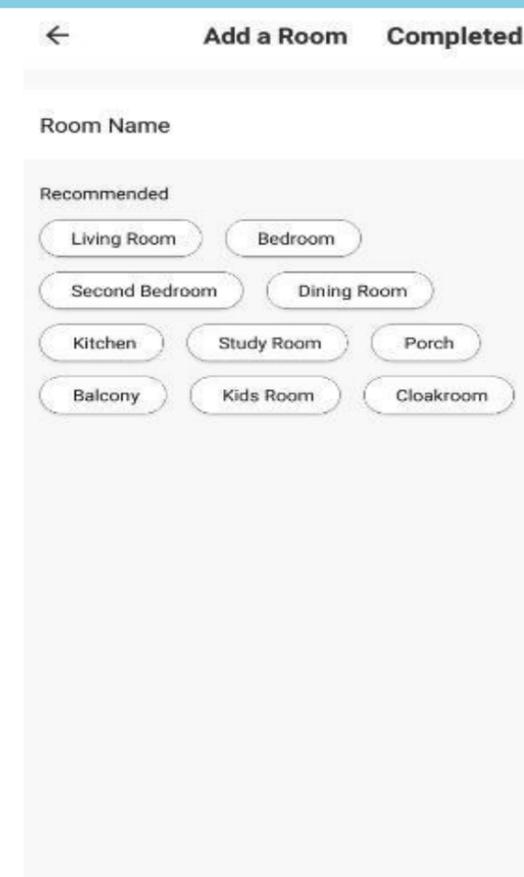


Fig. 3


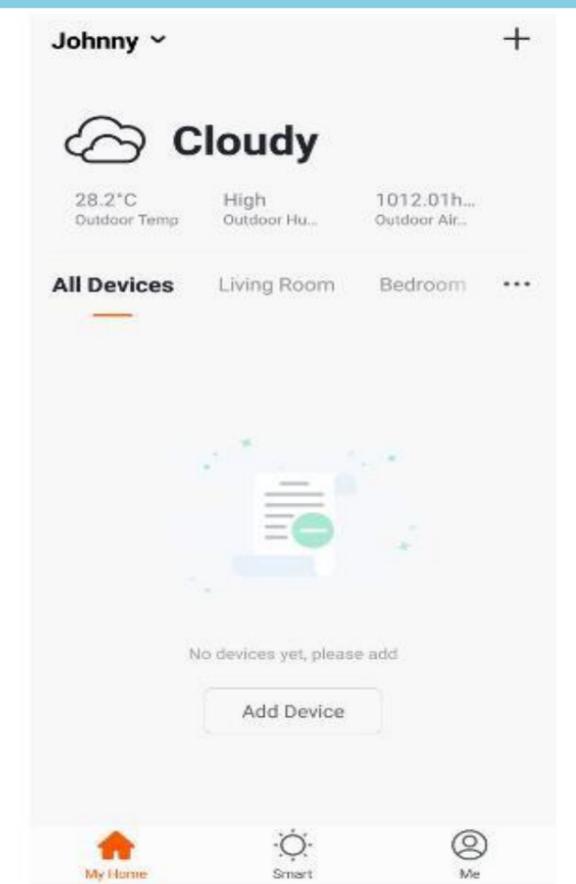


Fig. 4

NO.3.1 Family/Member Management

Click the pull-down arrow at the top left corner of "My Home" to add a family and manage families.
One account can manage multiple families at the same time.
The user can operate a device in a family by selecting your family.

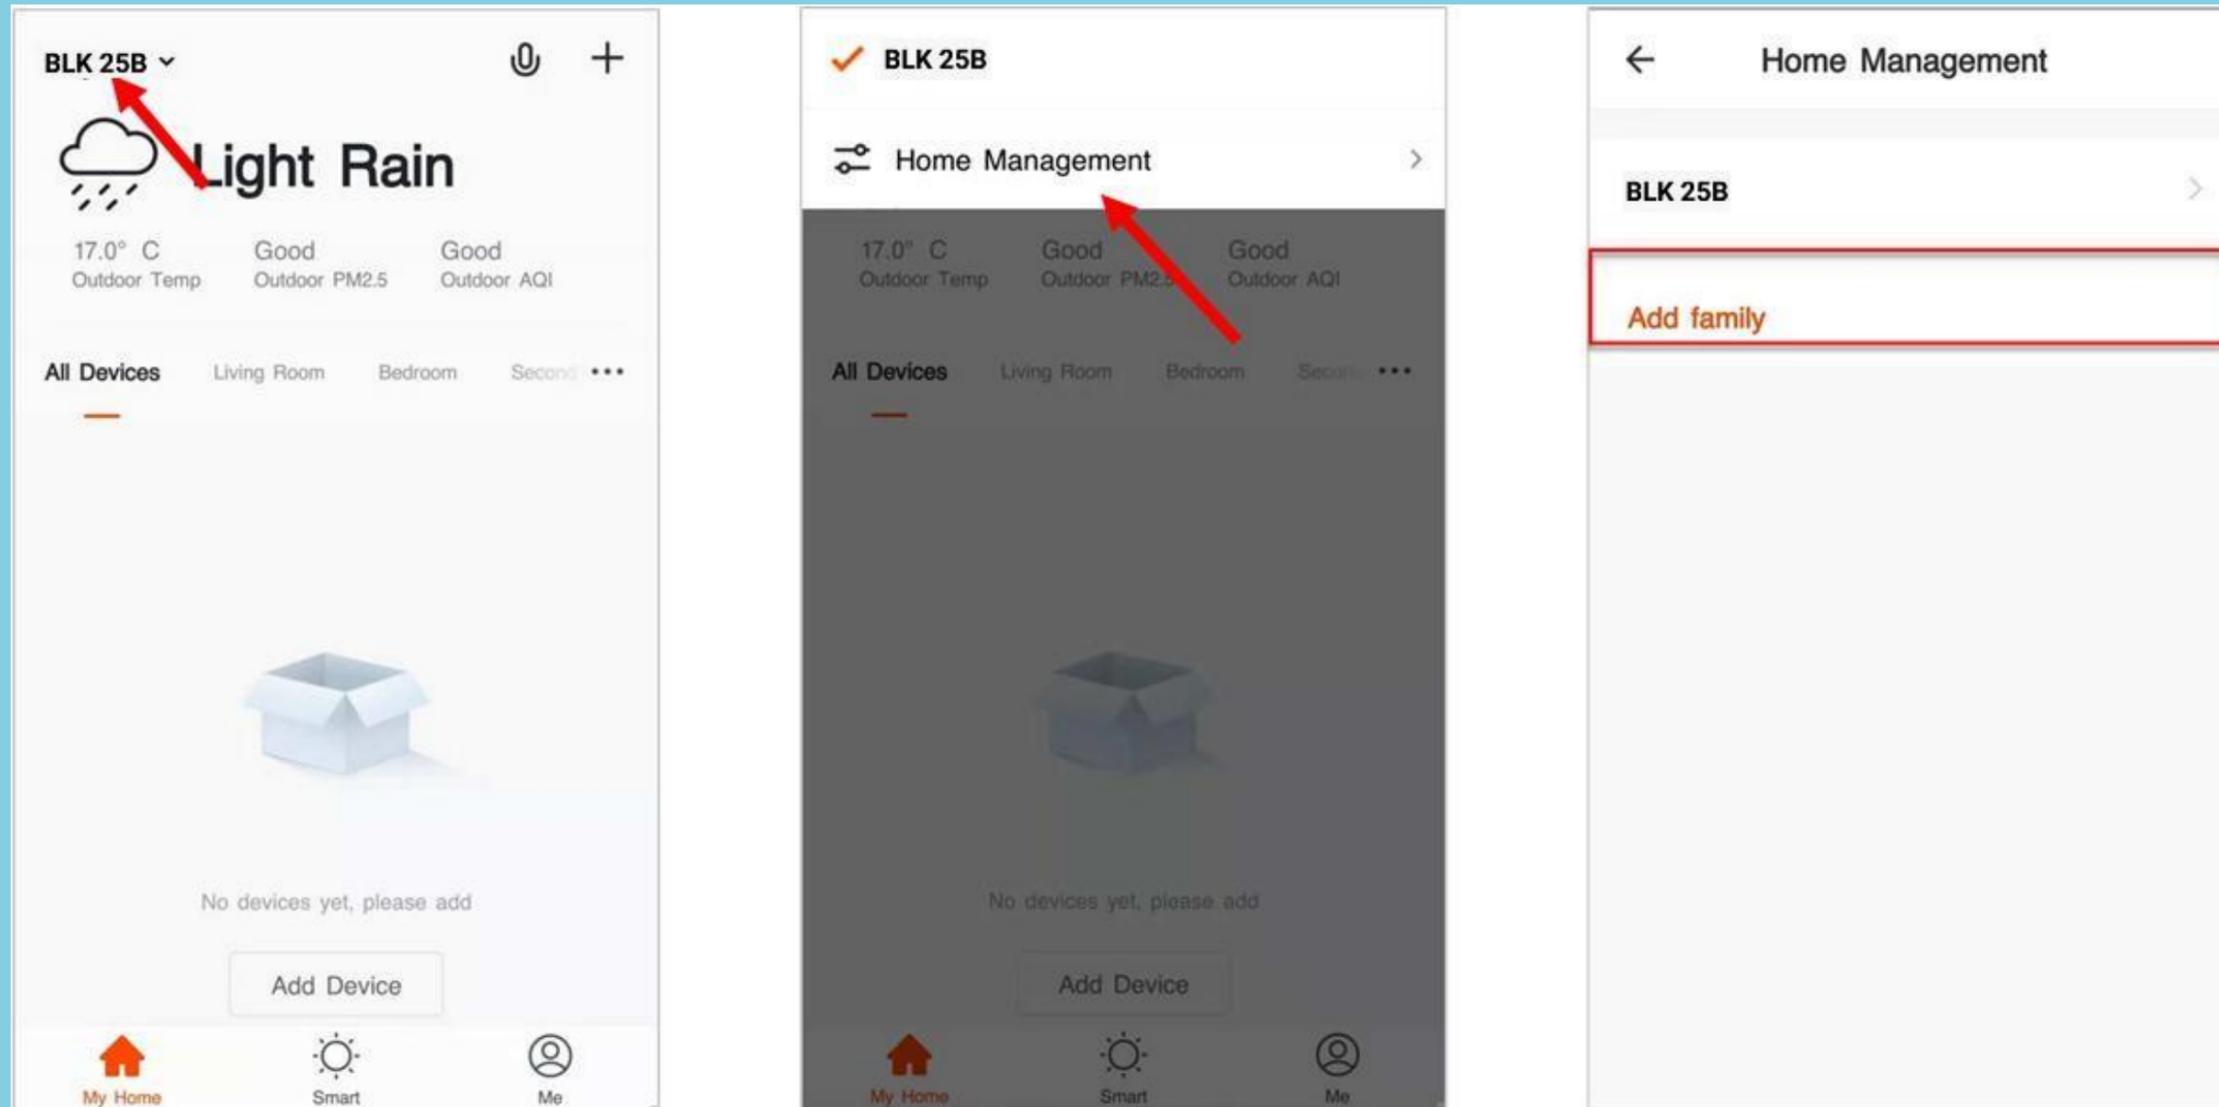


NO.3.1 Family/Member Management

Click “BLK 25B” to go to the Family settings, as shown in the figure.

Combine and classify administrative access of different individuals to devices. All devices and smart scenarios in a family can be shared among family members without having to complete the sharing settings each time

Other family members can enjoy control of smart devices in the household, but will not be able to modify, add, or delete a device

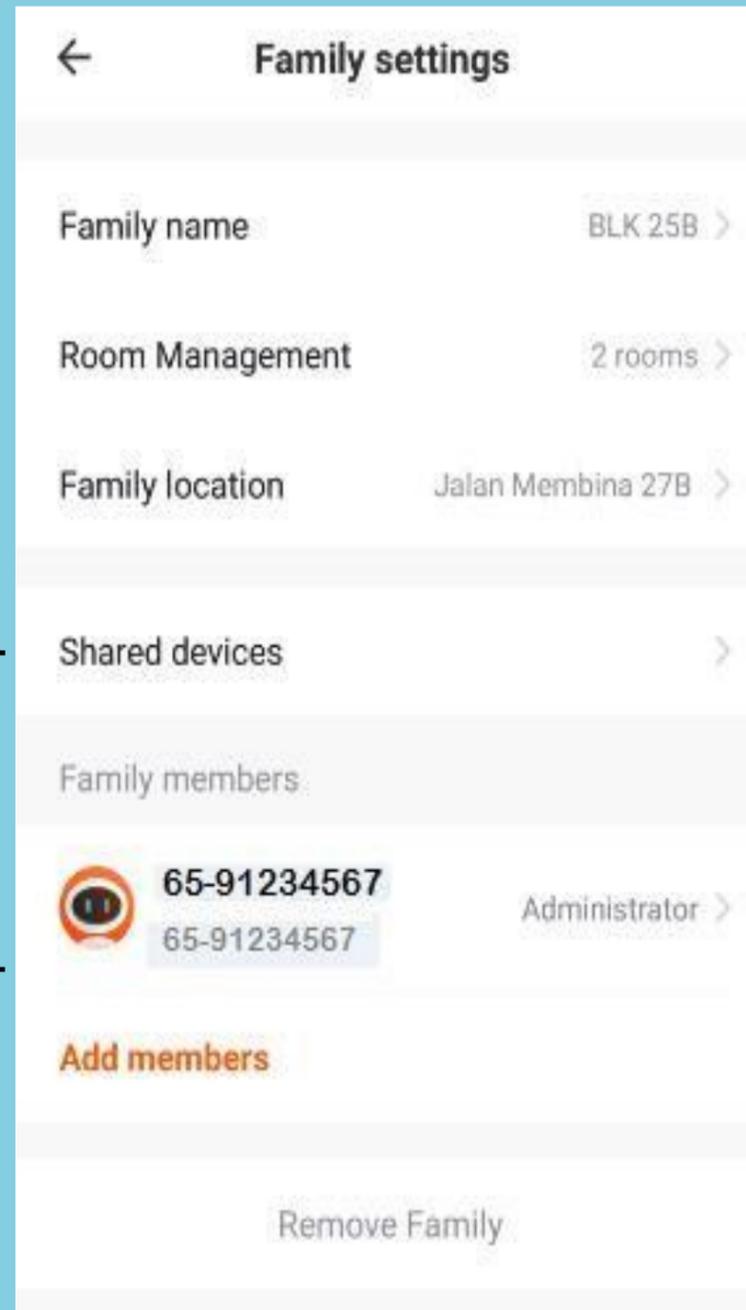


Add/Delete rooms in a family and manage all room settings in a family in one place


Administrators have the highest level of access, which allows them to manage access to devices or access granted to other family members

NO.3.2 Adding Devices - All Devices

Click "Add Device" on the app home page or the "+" sign at the top right corner to go to the "All devices" page, where devices can be selected and added as necessary.

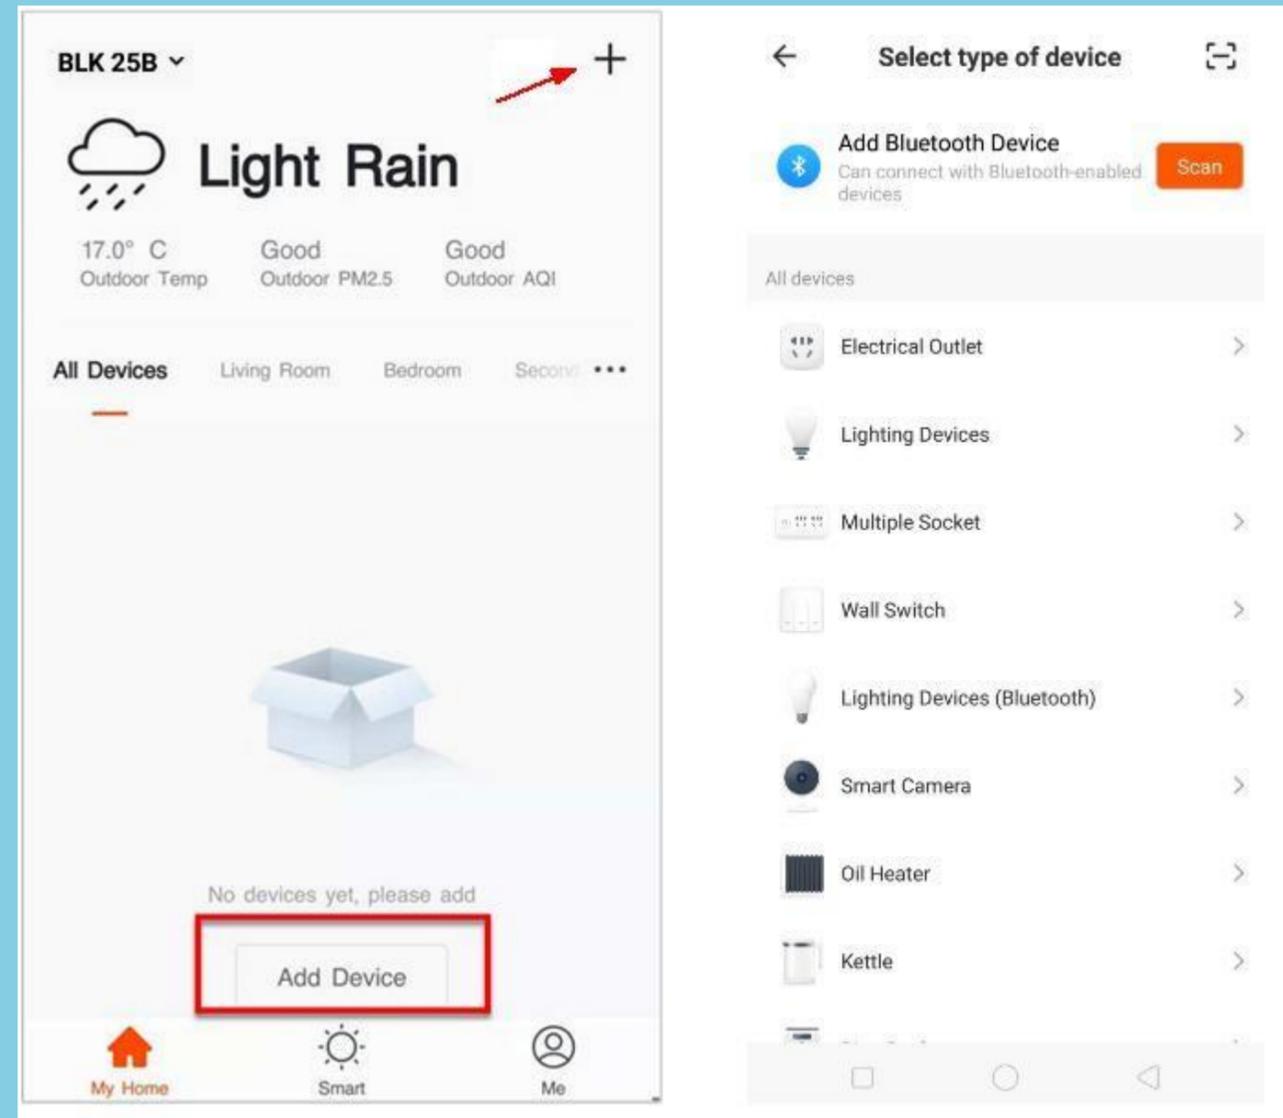

NO.3.2 Adding Devices - Default Mode

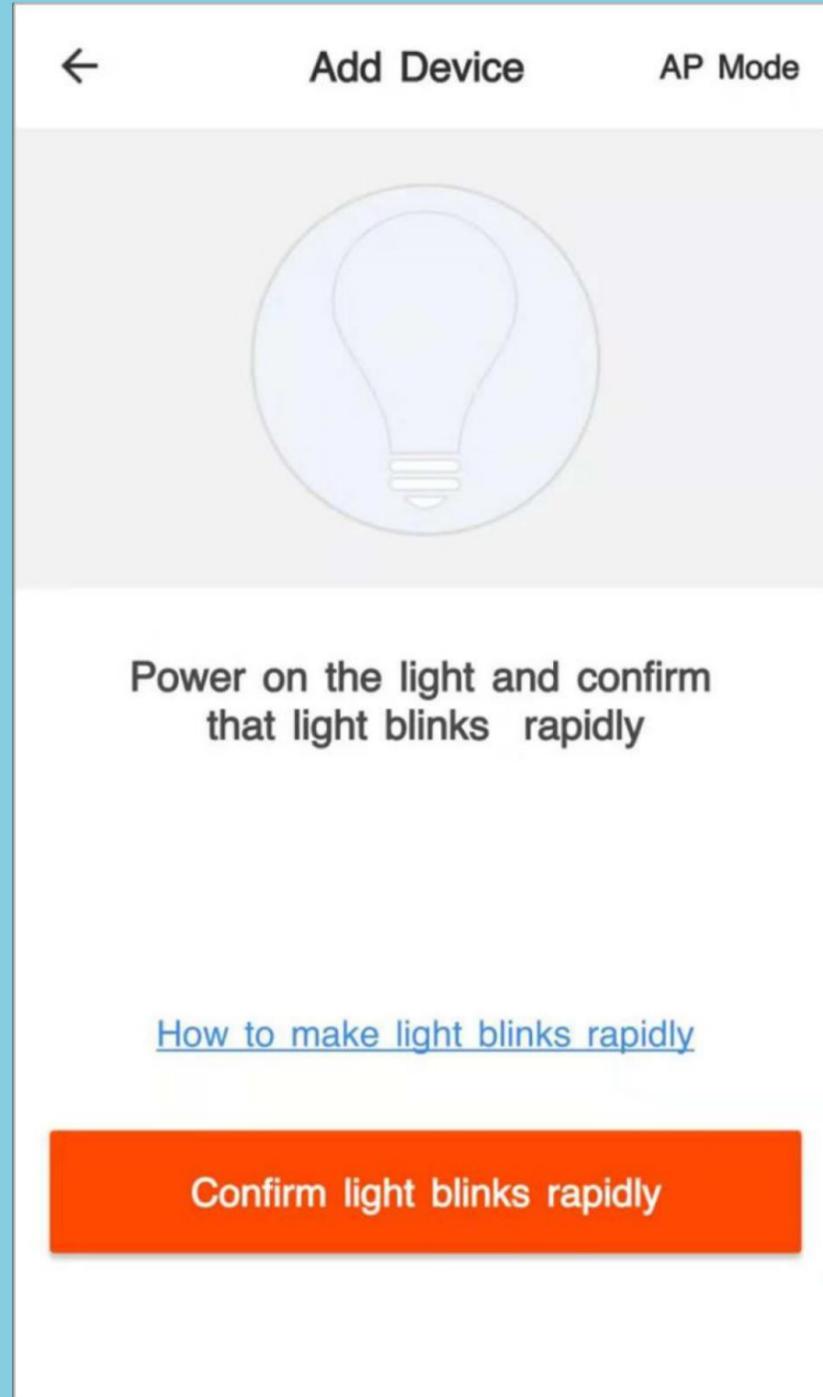

1. The app supports two configurations: Default mode and Compatibility mode. Click "AP Mode" at the top right corner of the "Default mode" page to switch between modes
2. To select "Default mode", please make sure the indicator light on the smart device is flashing rapidly (blinking twice per second) and then click the button to proceed to the next step
3. If the indicator light is not flashing rapidly, click "How to make light blinks rapidly" to view the instructions

NO.3.2 Adding Devices - Default Mode

Notes: How to set indicator light to rapid flashing:

Step 1 /3
Power on device.
Power off after 10s and then power on



The illustration shows a ceiling-mounted light fixture on the left and a hand turning a square wall switch to the 'on' position on the right.

Step 2 /3
Turn on-off-on-off-on
(Keep time interval not too short, turn off after light is on)





The illustration shows two actions: a hand turning a switch labeled 'ON' to the right, and then a hand turning a switch labeled 'OFF' to the left.

Step 3 /3
Confirm light bulb is now rapidly flashing



The illustration shows a glowing yellow light bulb inside a circular frame. To the right of the bulb, a dark grey callout box contains the text '2 times per second'.

NO.3.2 Adding Devices - Compatibility Mode (AP Mode)

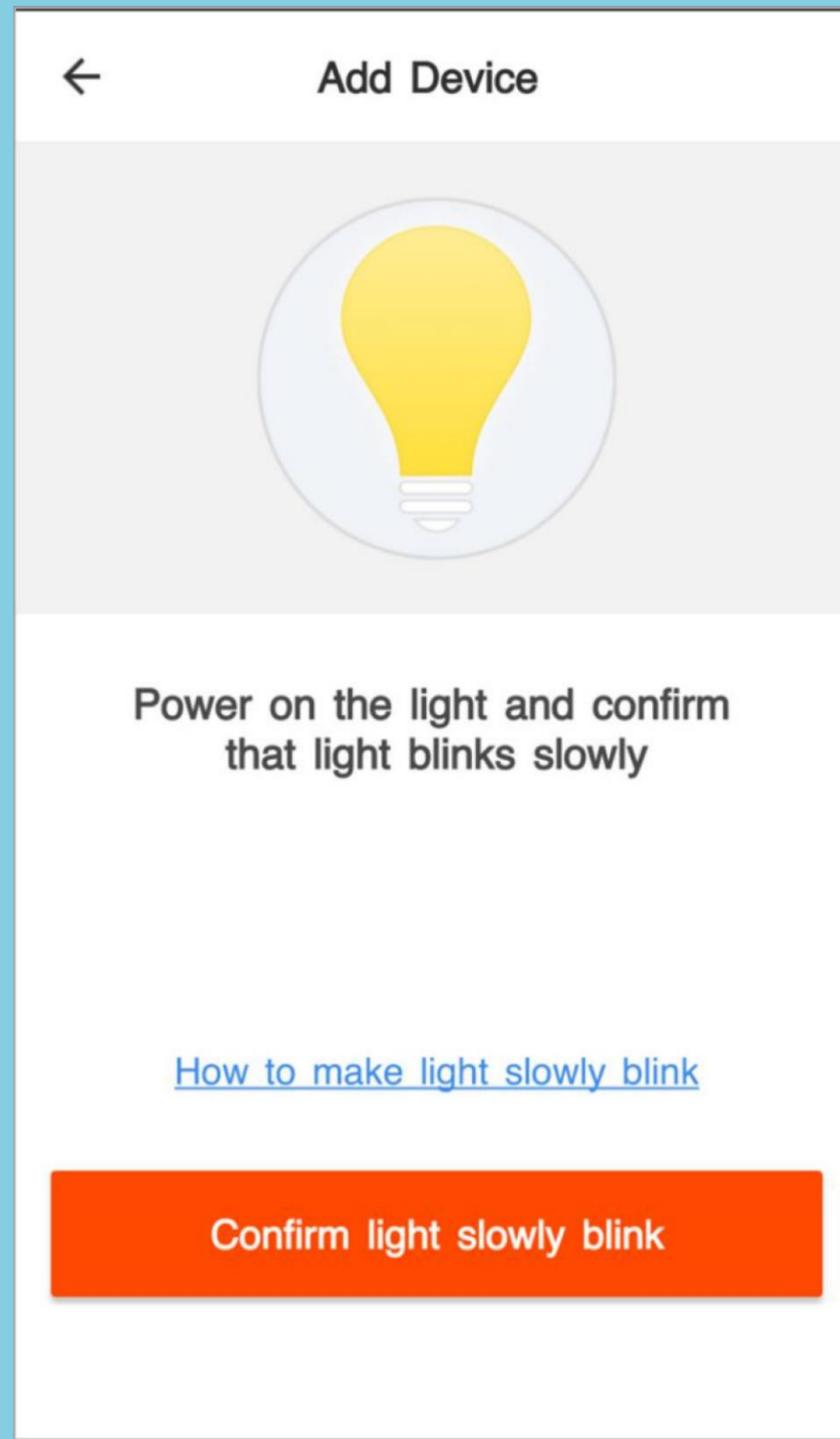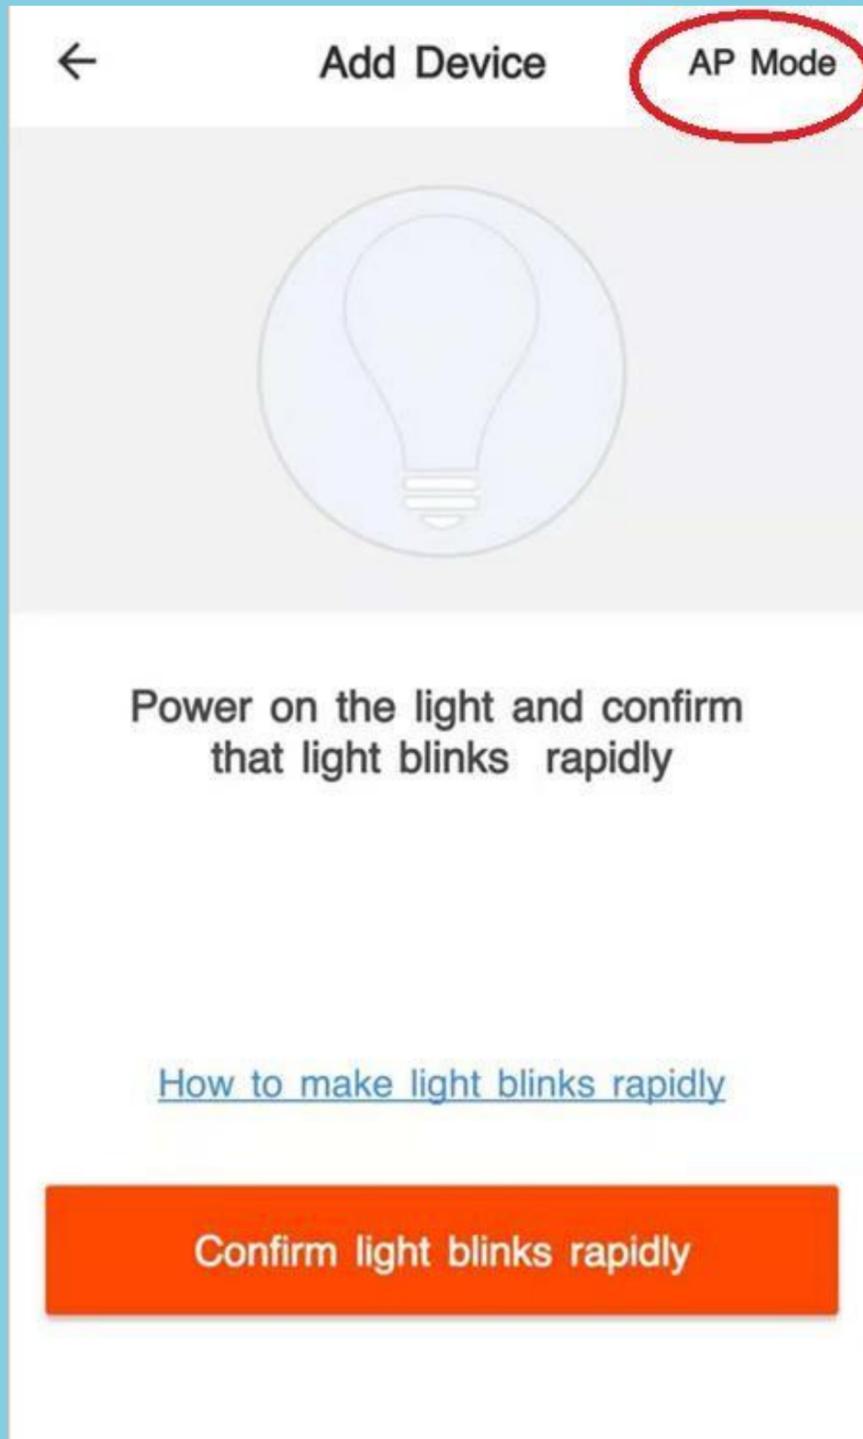

1. To select "AP Mode", please make sure the indicator light on the smart device is flashing slowly (blinking once every three seconds) and then click the button to proceed to the next step.
2. If the indicator light is not flashing slowly, click "How to make light slowly blink" to view the instructions.

NO.3.2 Adding Devices - Compatibility Mode (AP Mode)

Notes: How to set indicator light to slow flashing:

Step 1 / 4
Power on device.
Power off after 10s and then power on



Step 2 / 4
Turn on-off-on-off-on
(Keep time interval not too short, turn off after light is on)



Step 3 / 3
Confirm light bulb is now rapidly flashing



Step 4 / 4
Operate again: Turn on-off-on-off-on
until light is slowly flashing



NO.3.2 Adding Devices - Enter Wi-Fi Password

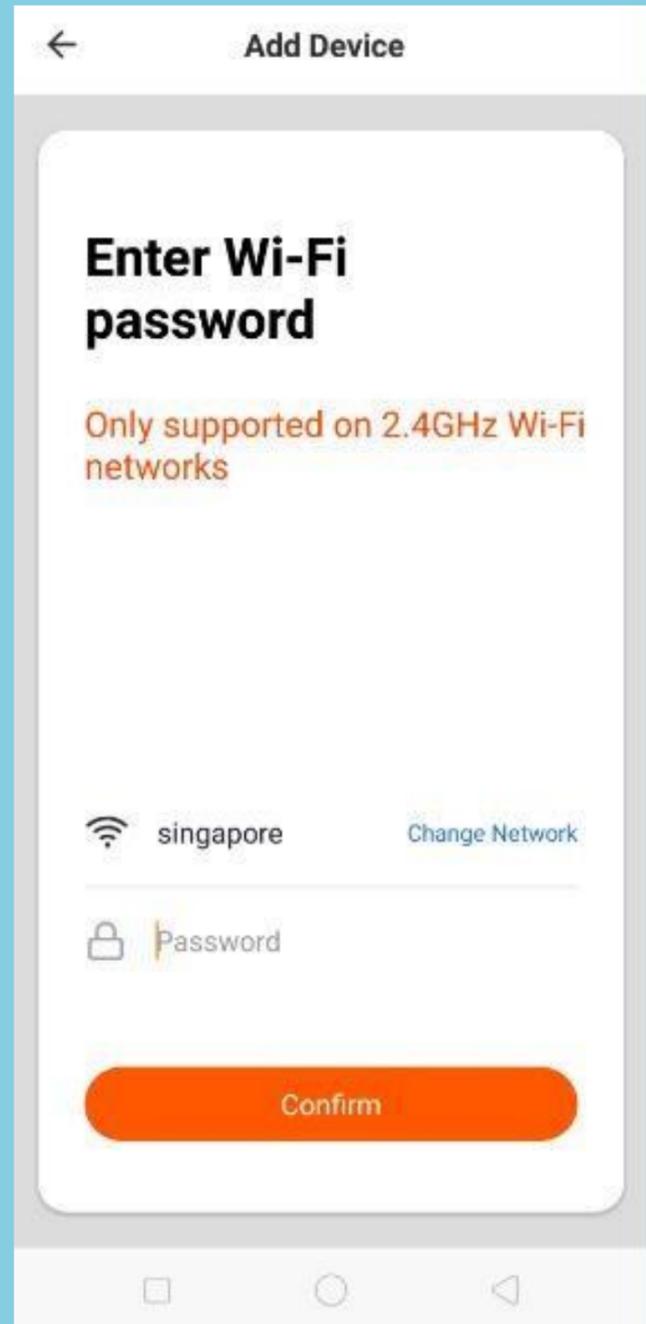


Fig. 1

In a selected mode, clicking "Confirm" on the page when the indicator light flashes rapidly/slowly will bring up the page shown in Fig. 1.

Select the Wi-Fi in the work area of a device that can enable successful Internet connection, enter the Wi-Fi password, and click "OK" to proceed to configuration

NO.3.2 Adding Devices - Configuration

If Default mode is selected, app configuration will be completed as shown in Fig. 1. Successful configuration will appear as shown in Fig. 2. Names of devices that have been configured successfully can be changed, and the locations of the rooms where the corresponding devices are can be selected.

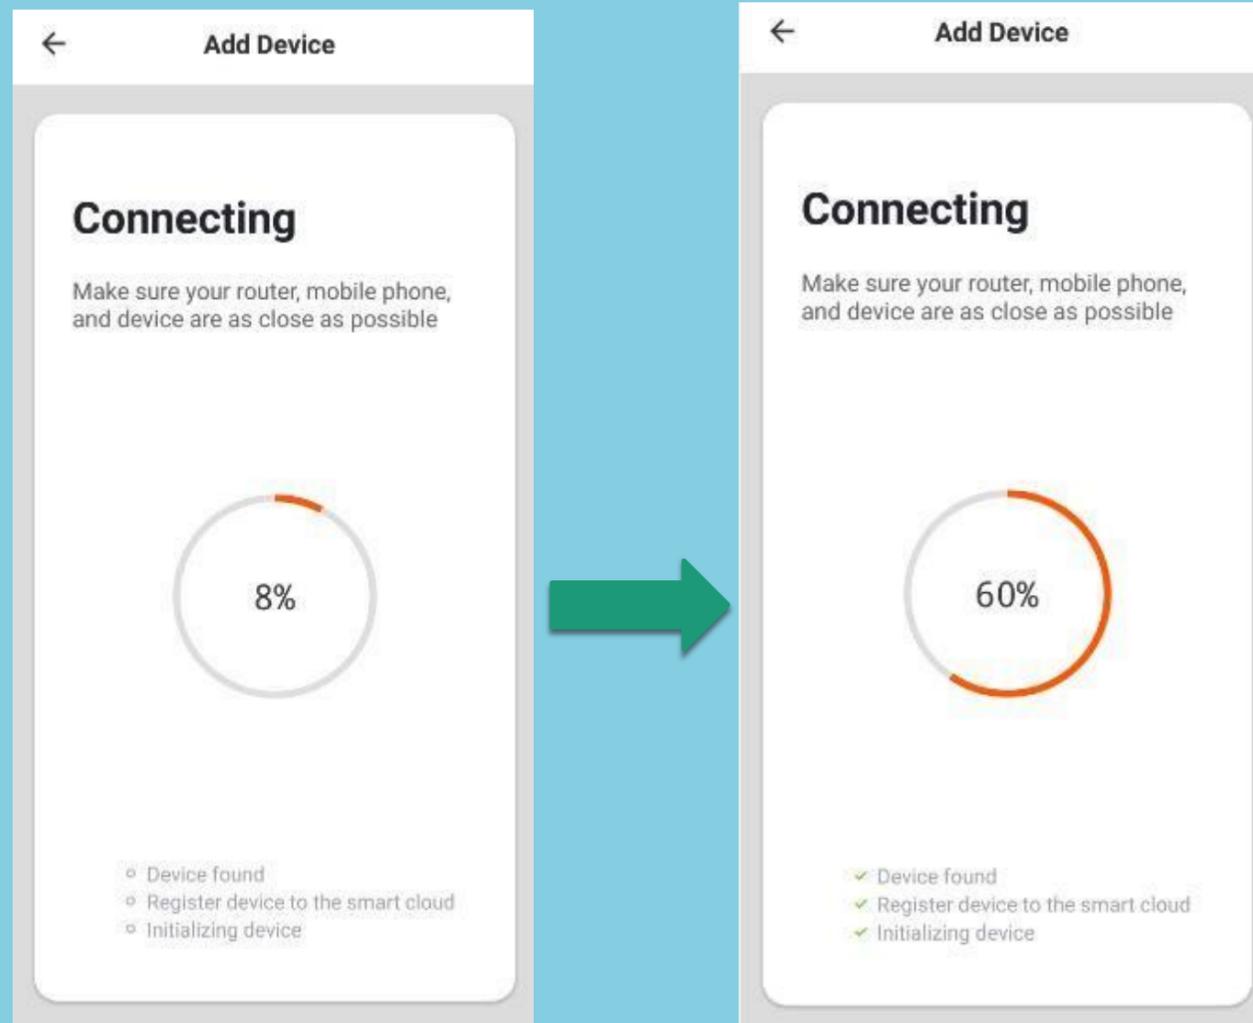


Fig. 1


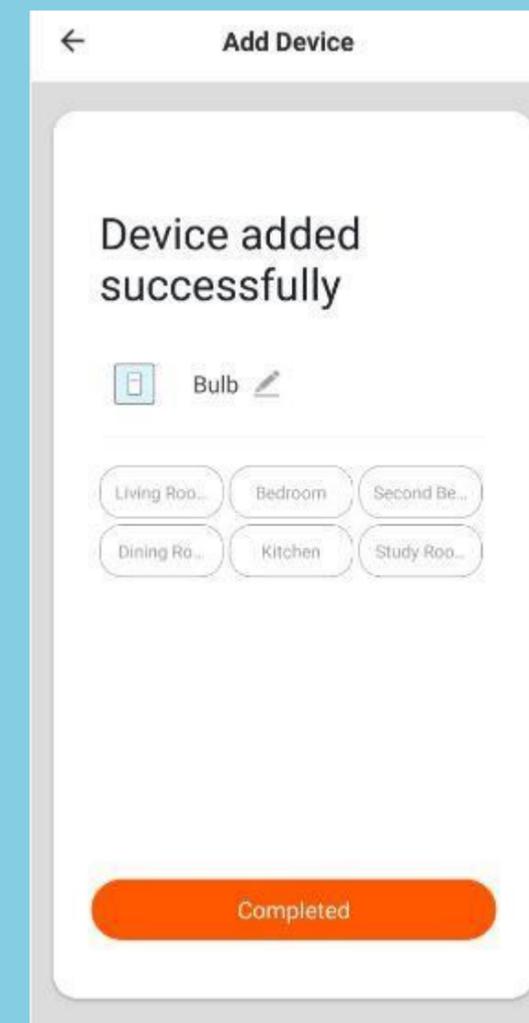


Fig. 2

NO.3.2 Adding Devices - Configuration

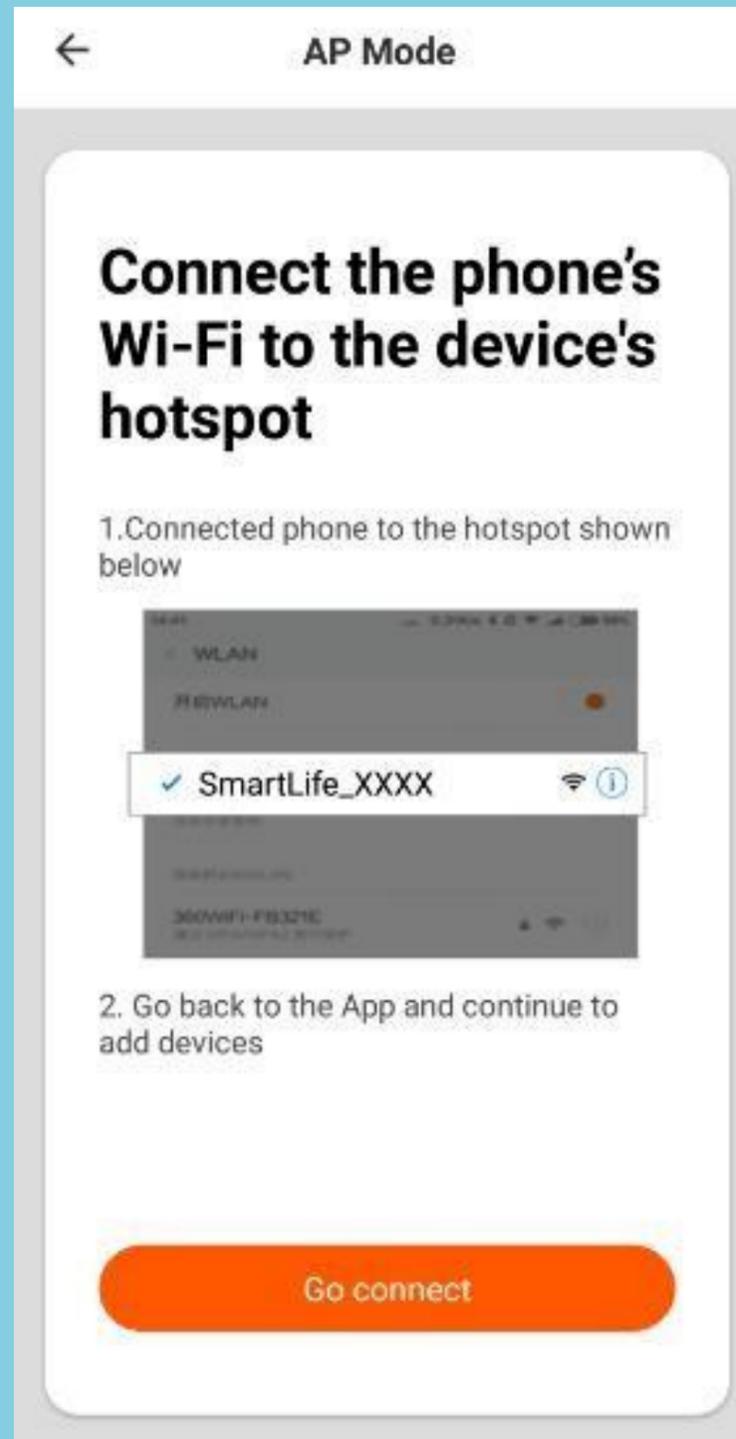

When in AP Mode (slow flashing), you can select hotspot configuration, but connection must be made with the Wi-Fi hotspot whose name begins with "SmartLife", as shown in the figure
Note: Some hotspot names may be user-defined

NO.3.2 Adding Devices - Configuration

Connect to the specified hotspot and then return to the Configuration menu to proceed with configuration. The process in the app will be completed, as shown in Fig. 1
Successful configuration will appear as shown in Fig. 2


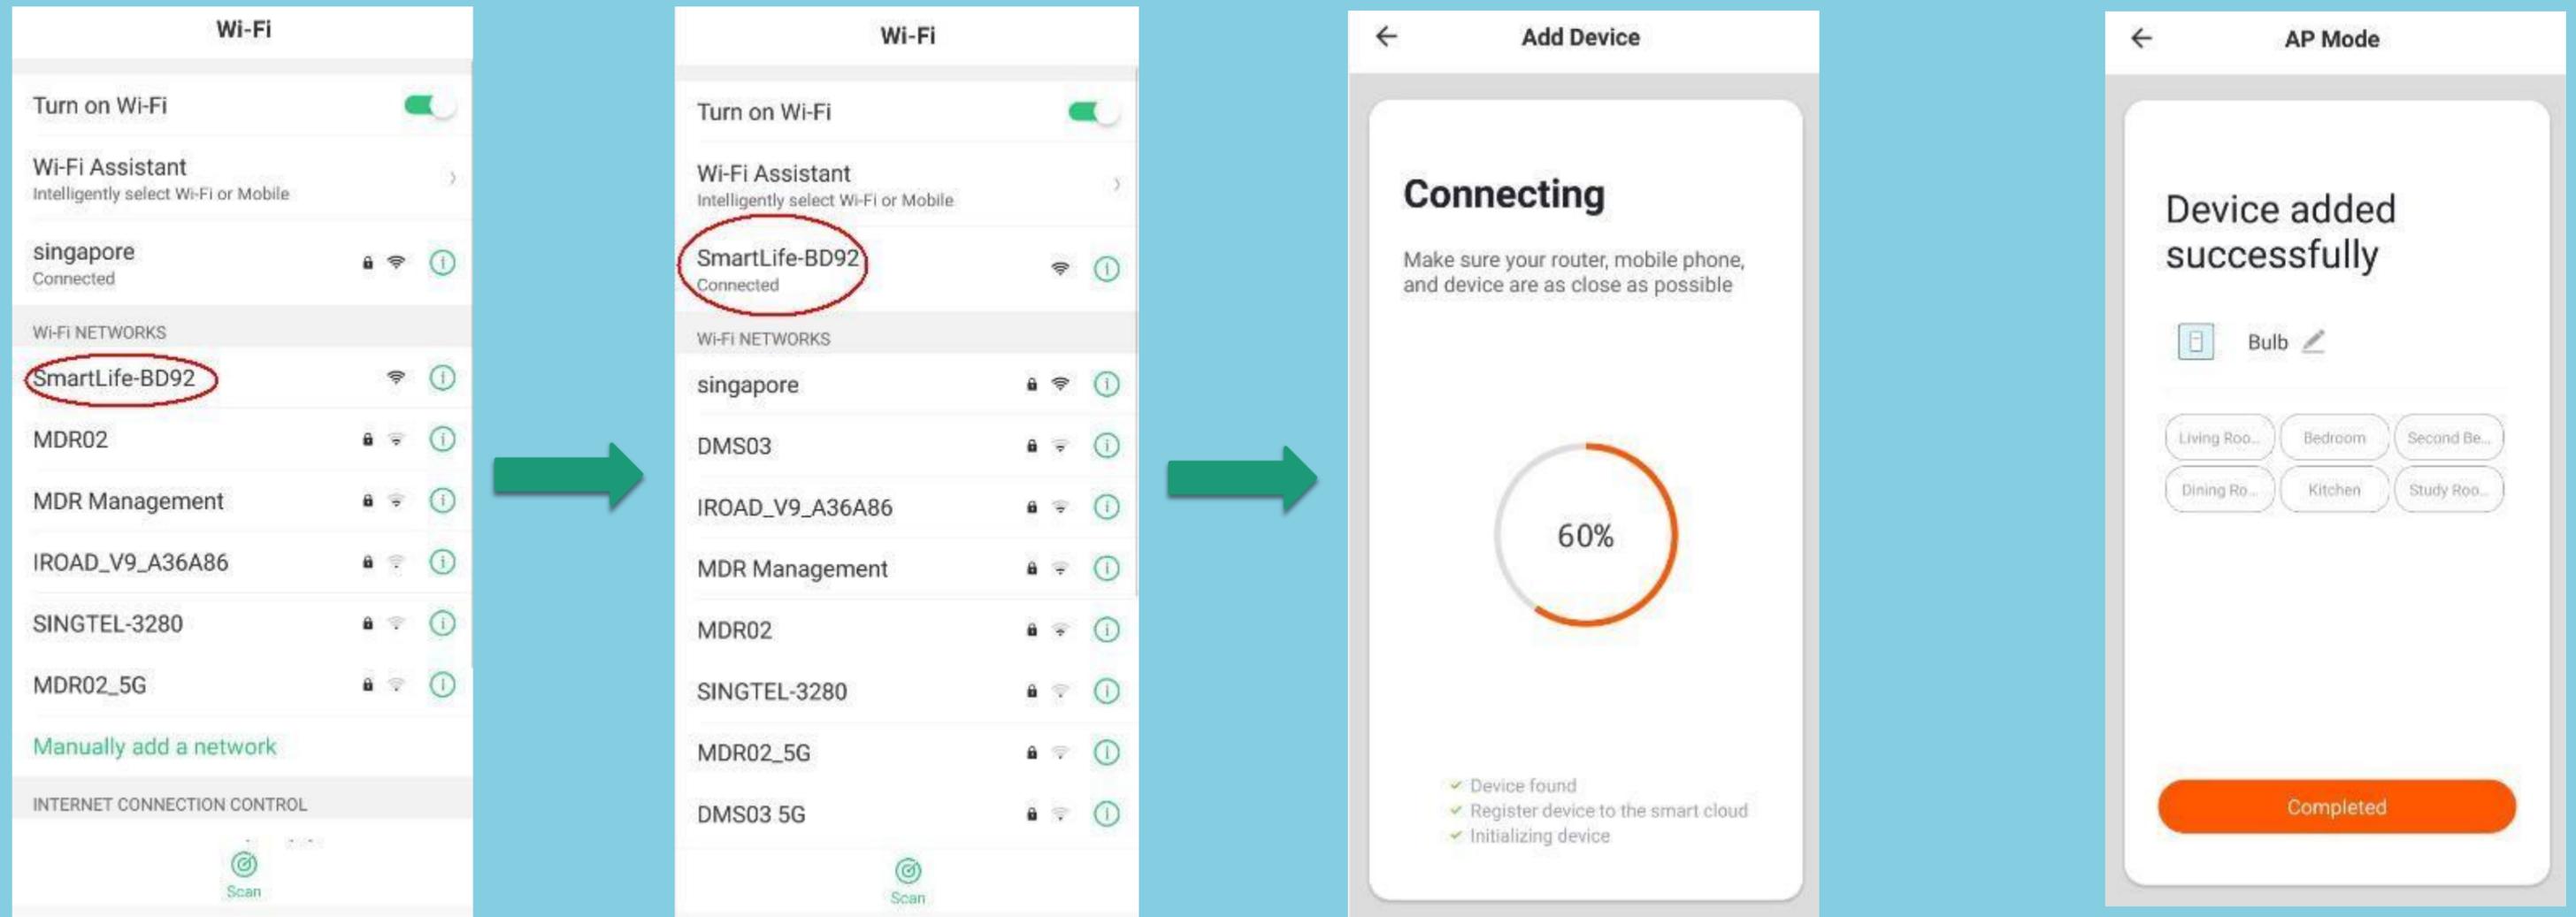


Fig. 1


Fig. 2

NO.3.2 Adding Devices - Failure

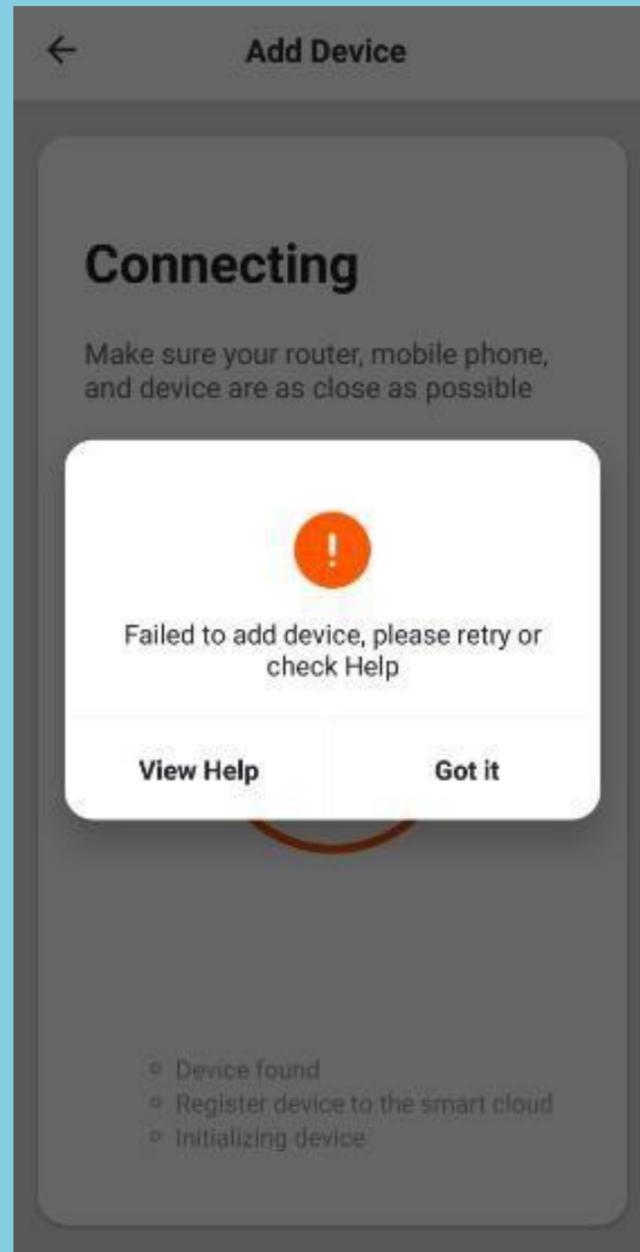

If configuration fails, it will appear as shown in the figure. You can choose to add again or go to “View Help” for troubleshooting assistance

NO.4 Control Devices - Individual Control

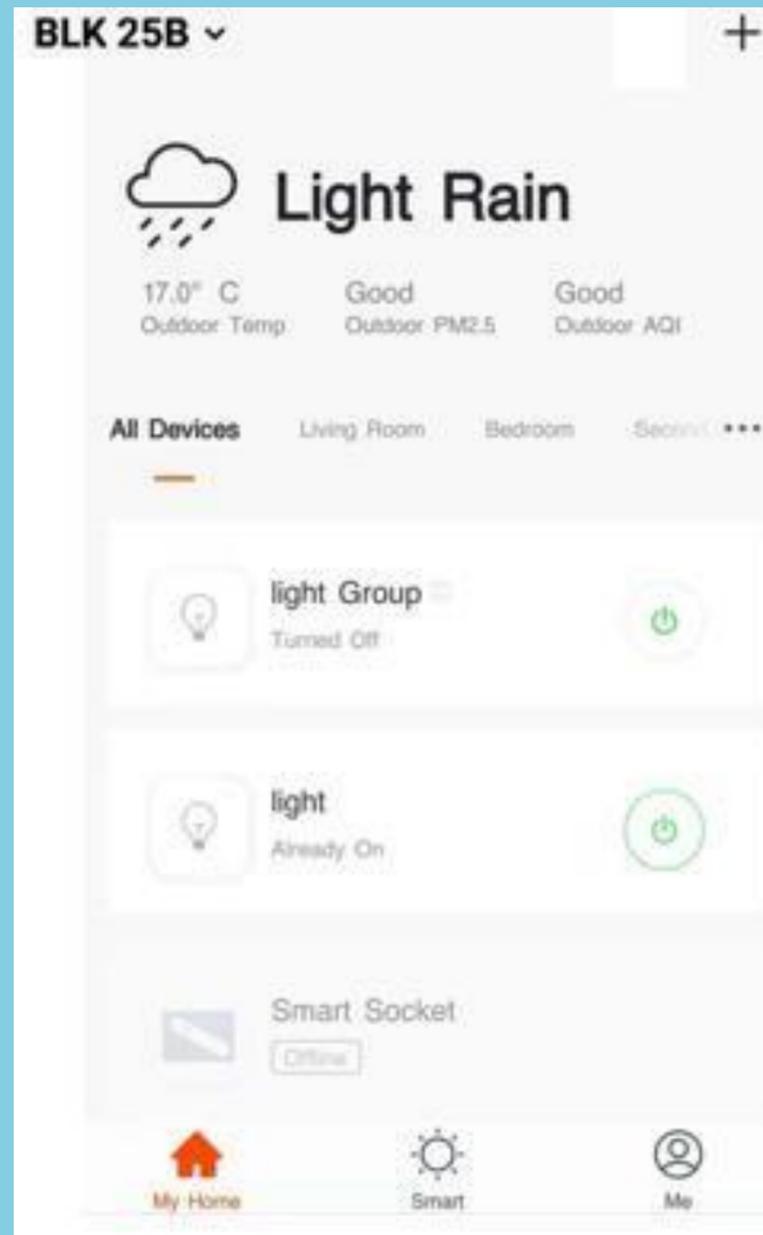

When devices have been configured successfully, the smart devices will appear on the home page. Click to open the control panel for smart devices.

Note:

1. When devices are online, some will support use of hotkeys. Click "Frequently Used Functions" to use them
2. When devices are offline, they will appear as "Offline" and will not be available for use

NO.4.1 Control Devices - Individual Control

Open the control panel for devices. For example, Fig. 1 shows the light is off, and only the timer can be accessed in the off mode. Fig. 2 shows the light is on, and scene, color, brightness, and schedule can be configured in the on mode. Click "..." at the top right corner of the control panel to manage individual devices.



Fig. 1


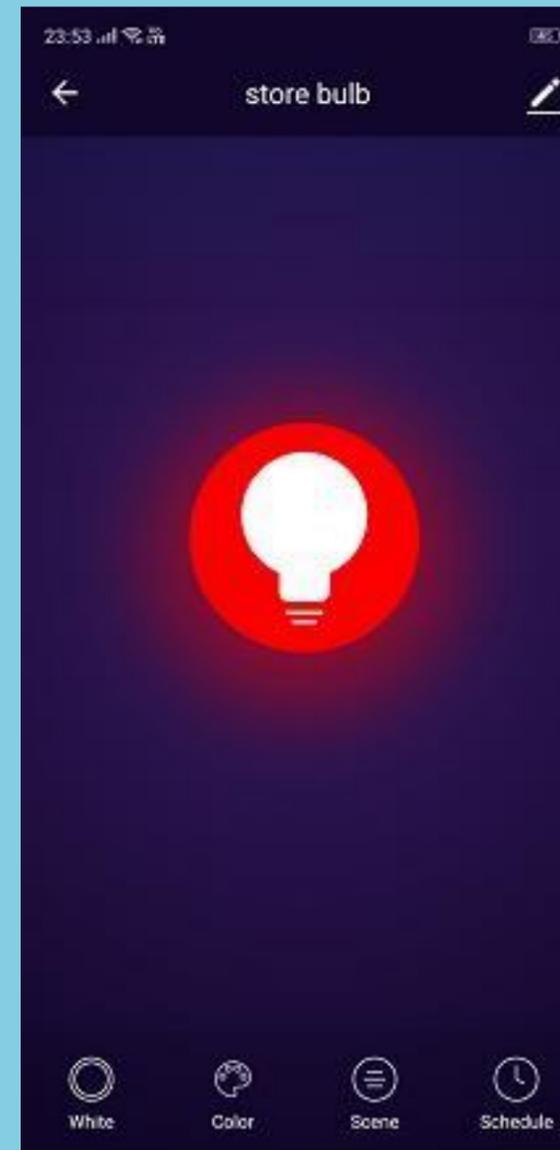


Fig. 2

NO.4.1 Control Devices - Individual Control

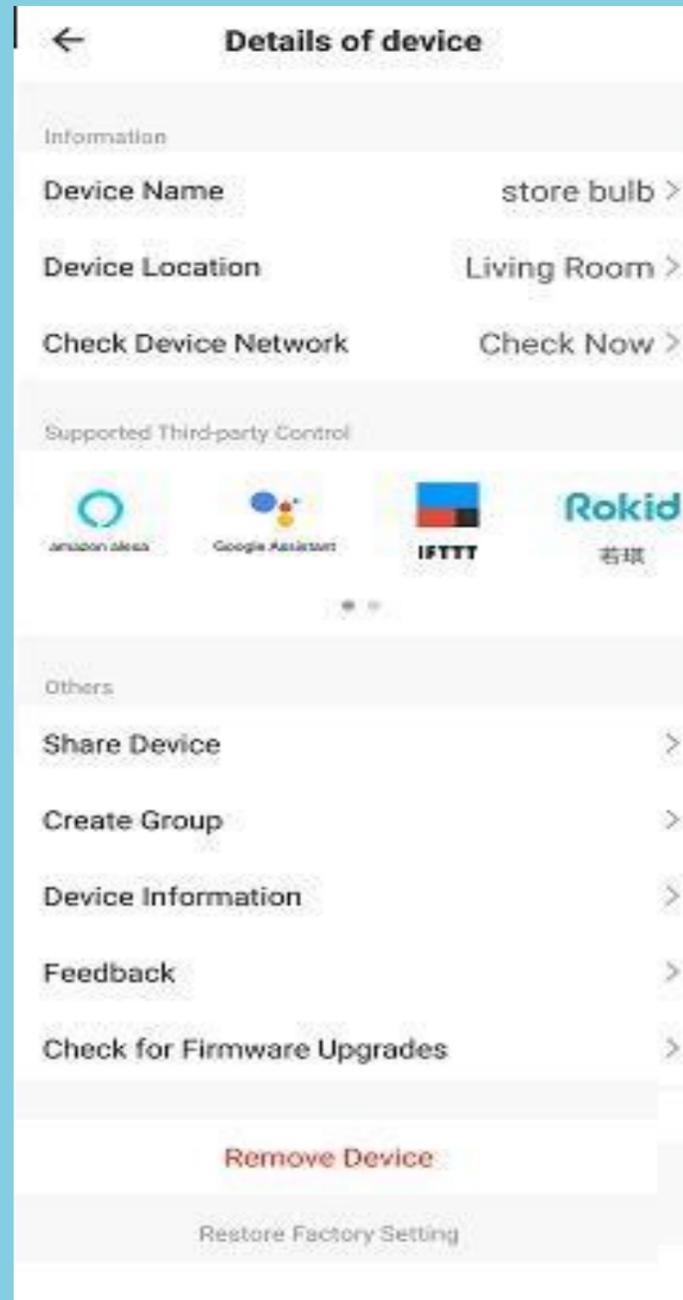


The device modification menu is shown in the figure:

1. Device name: You can change the name and location of a device.
2. Device Location = You can choose where the device is located, such as the living room or bedroom.
3. Check Device Network: Check the device connectivity, device WIFI strength and Network connection status.
4. Shared devices: You can share any individual device with others by entering their mobile phone numbers. (Note: Their mobile phone numbers must be registered with RAPLINK app accounts.)
5. Create Group: Click and the page will automatically show all devices that have been added and have the same model number. A group cannot be created for devices with different model numbers.
6. Device information: Check here for: device ID, Wi-Fi signal strength, IP address, Mac address, and device time zone.
7. Feedback: You can submit feedback here on problems encountered during usage.
8. Check for firmware upgrades: You can check here for firmware updates.
9. Remove Device: Delete a previously added device from the list of devices.
10. Restore factory defaults: Remove devices and clear all data.

NO.4.1 Control Devices - Shared Devices

Click “Addsharing”, enter the account to share devices with, and click “Completed” to finish. To stop sharing with an account previously added, press and hold to delete in Android, or slide to the left to delete in iOS.

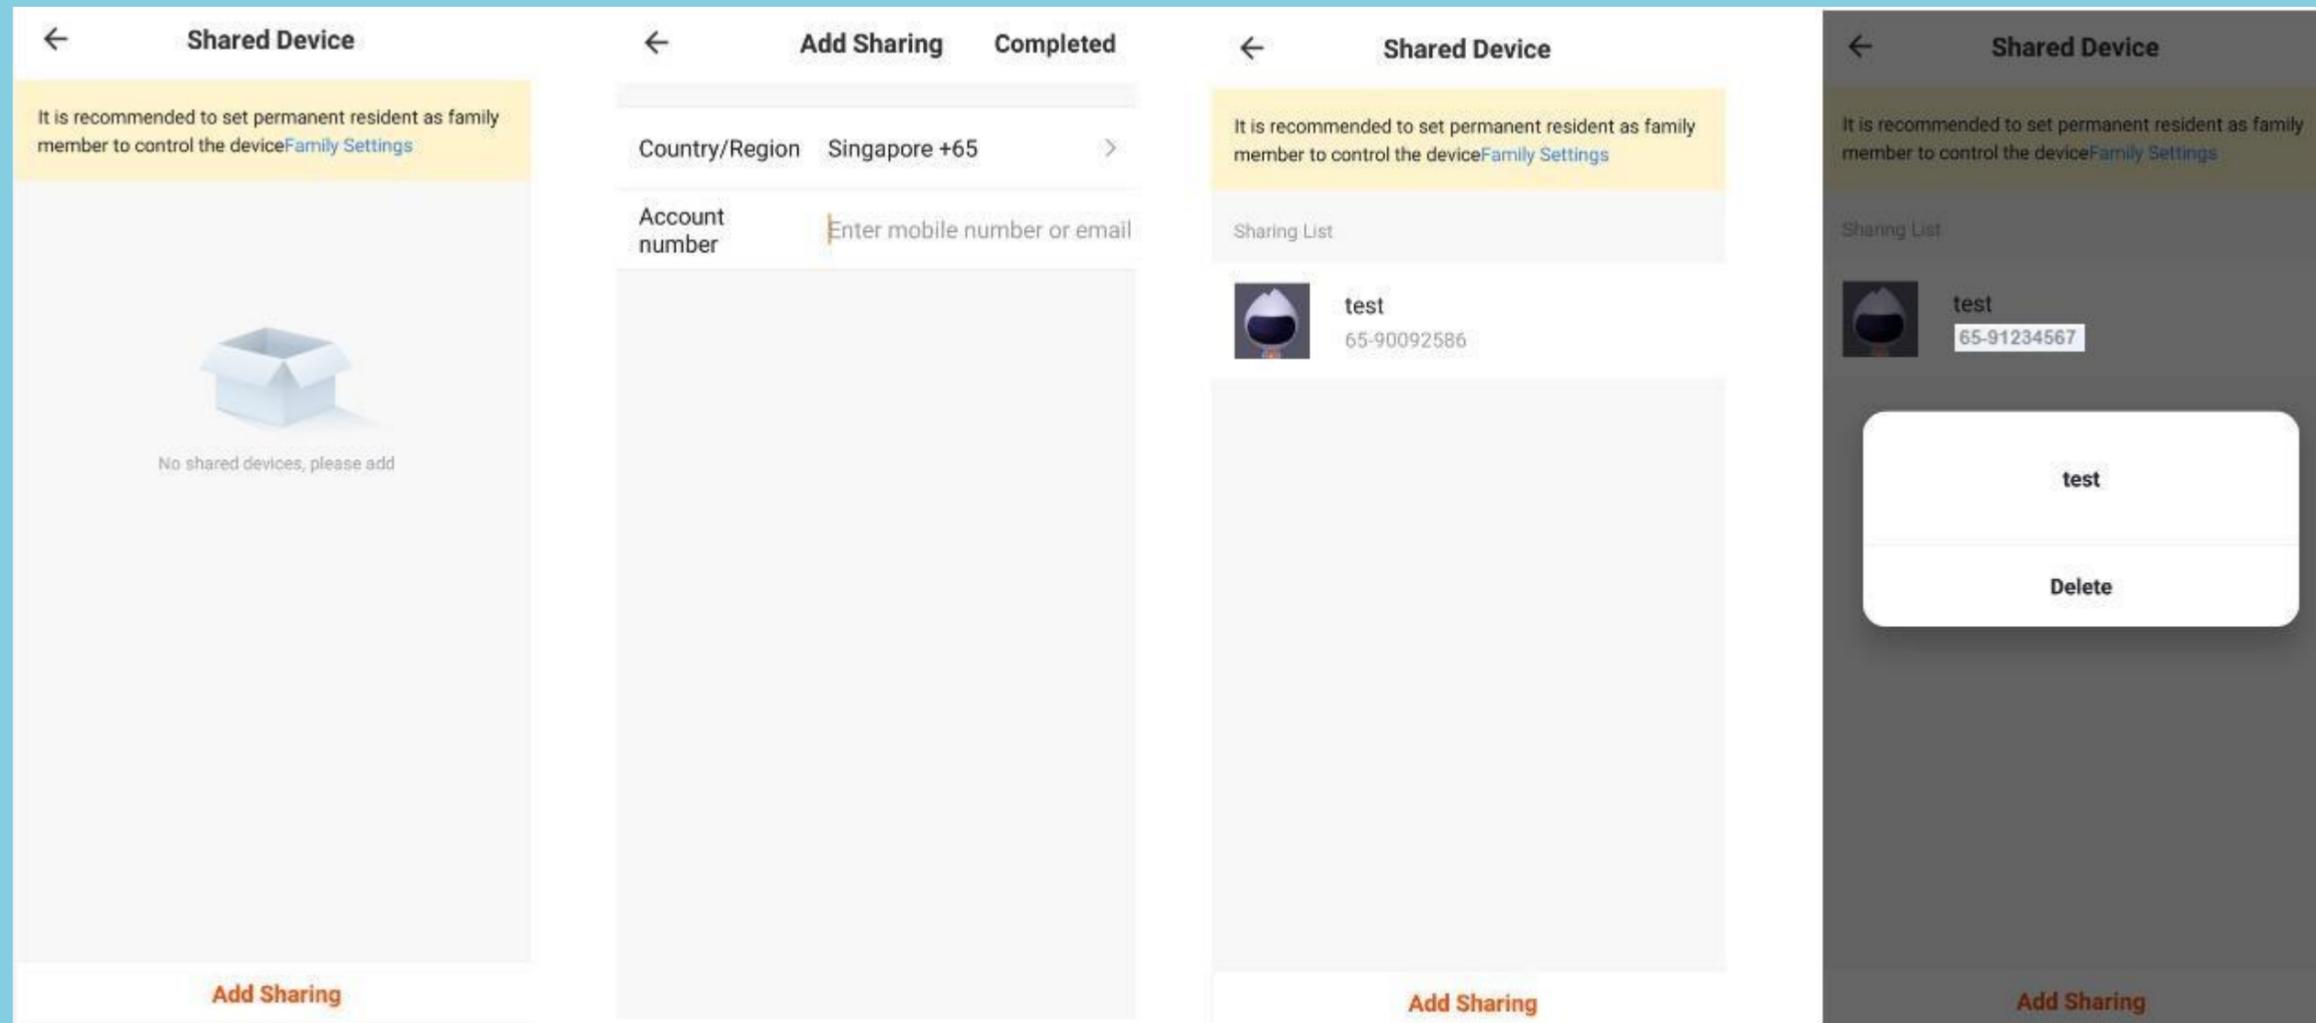

NO.4.2 Control Devices - Group Control

1. Click "Create Group" under "More" on a selected device page, as shown in Fig. 1.
2. The page displays all devices with the same model number and available to be added as a group. Select a device and click "Save", then enter group name and click "Confirm" to finish, as shown in Fig. 2.
3. When a group has been created successfully, the page will be automatically redirected to the group control panel in Fig. 3, where grouped devices can be managed.

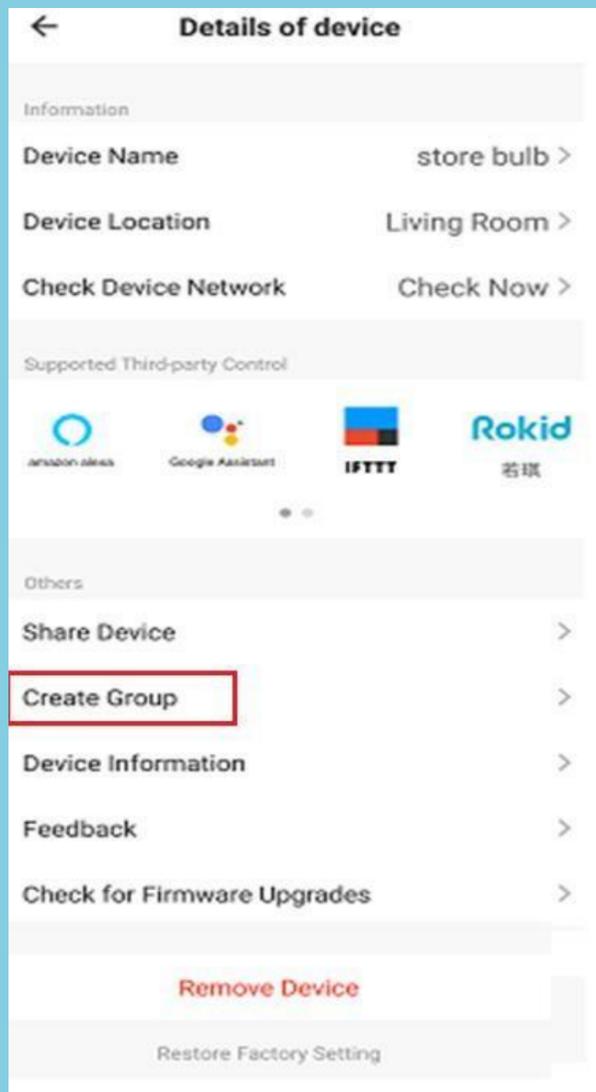


Fig. 1

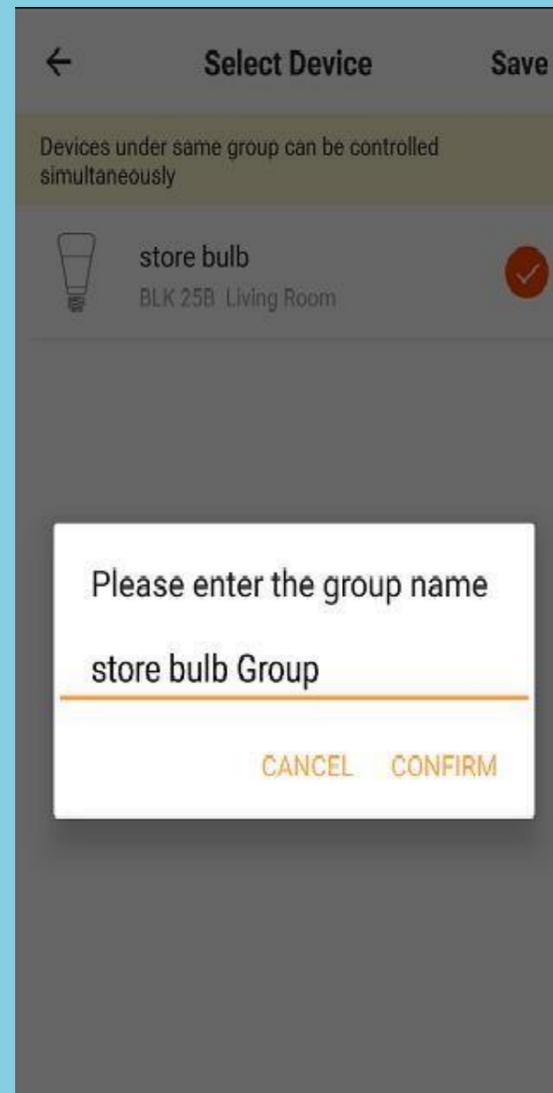


Fig. 2



Fig. 3

NO.4.2

Control Devices - Group Control

1. Groups that have been created can be viewed on the "My Home" page, and managed with hotkeys.
2. Open the group control panel as shown in Fig. 2.
3. Click  at the top right corner to configure or remove groups, as shown in Fig. 3.

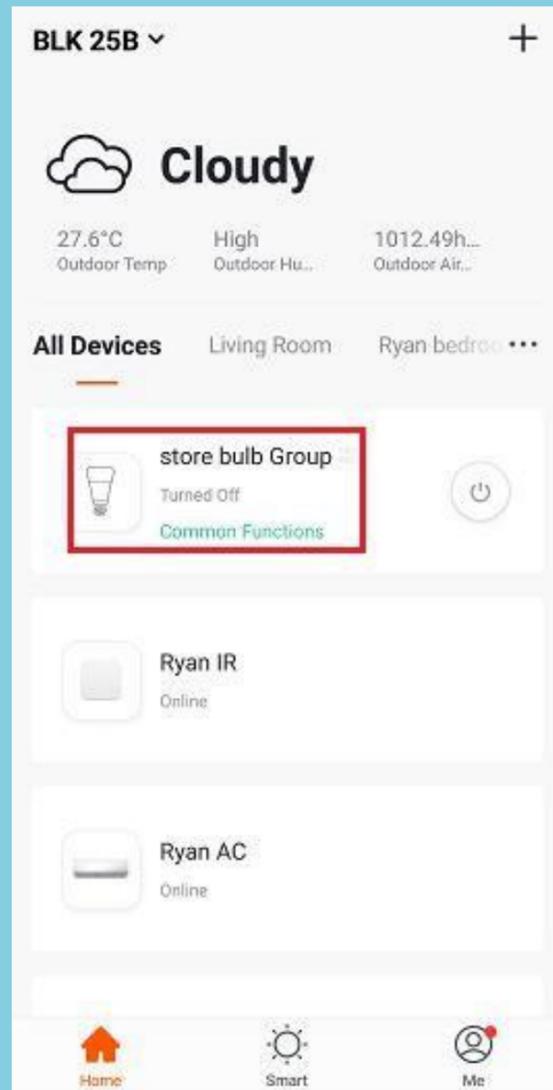


Fig. 1

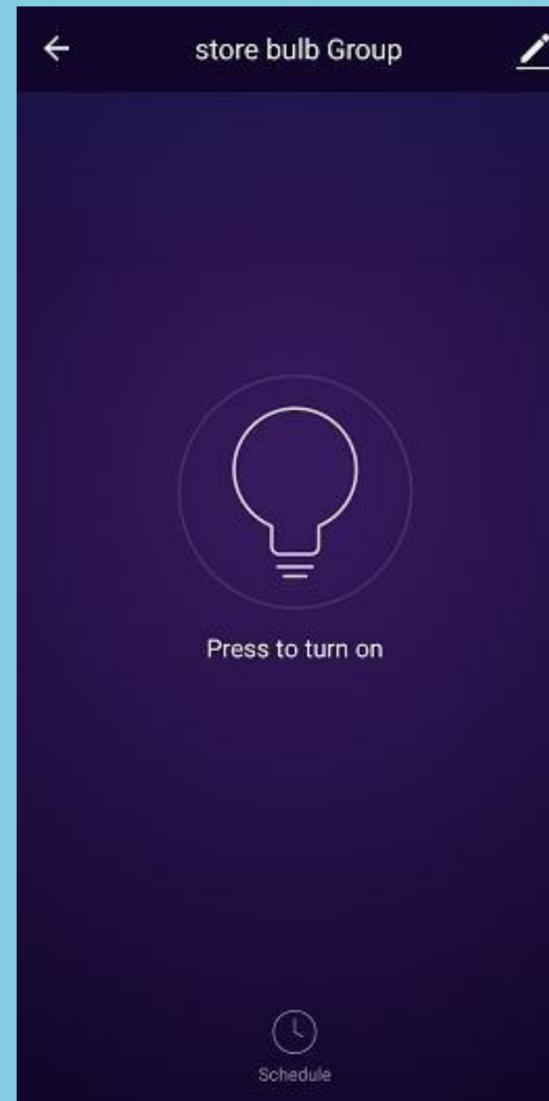


Fig. 2

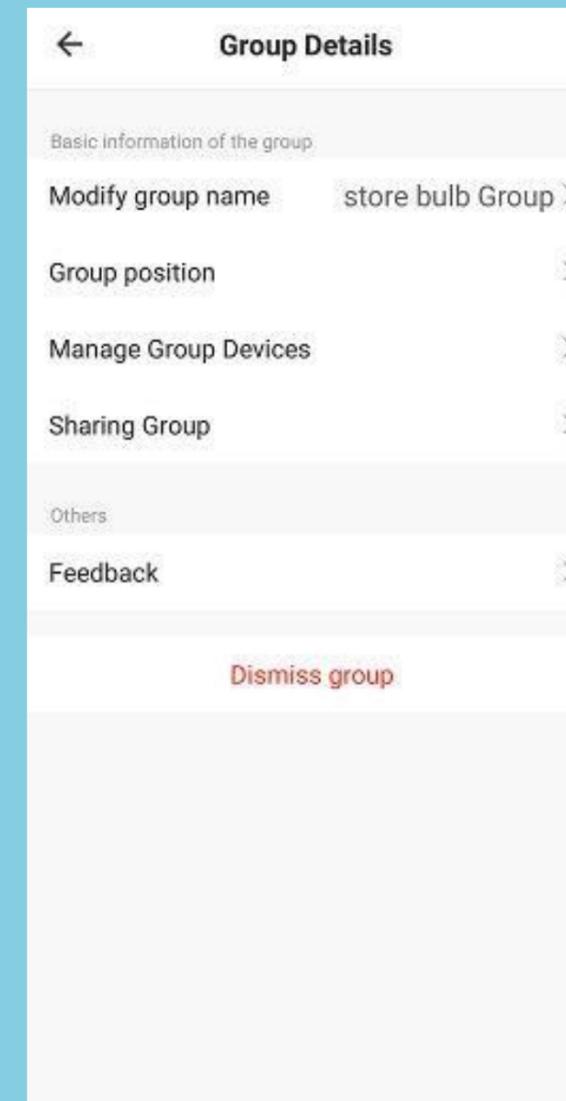


Fig. 3

NO.5.1 Smart Features - Automation

Click “Add Smart” on the “Smart” page or “+” at the top right corner and select “Automation” to go to the “Smart Settings” page, as shown in Fig. 3

Click “+” as shown in Fig. 3 to add the no. of conditions or the no. of actions.

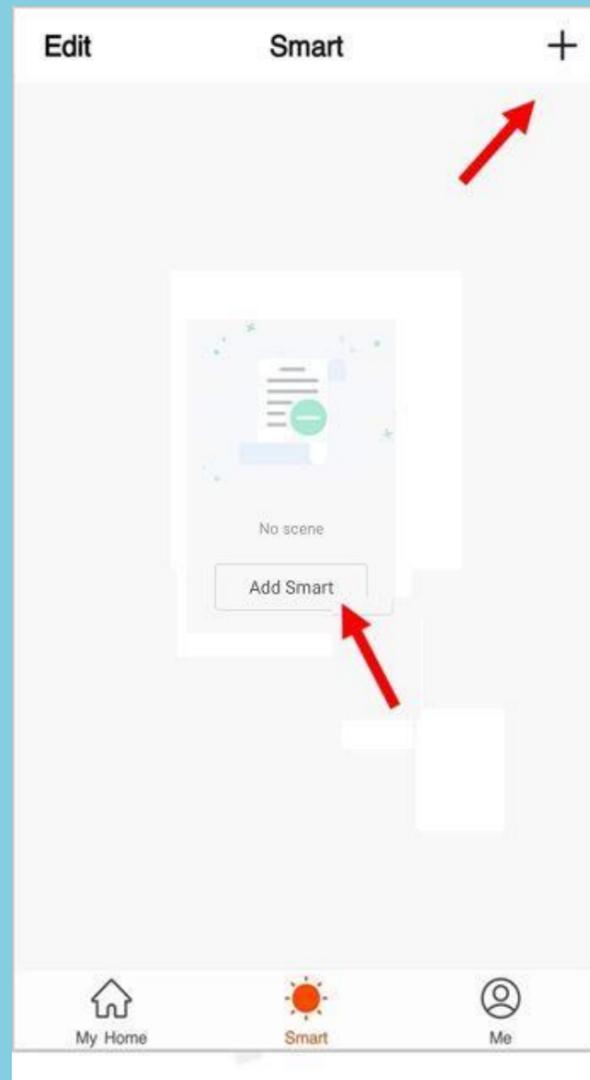


Fig. 1

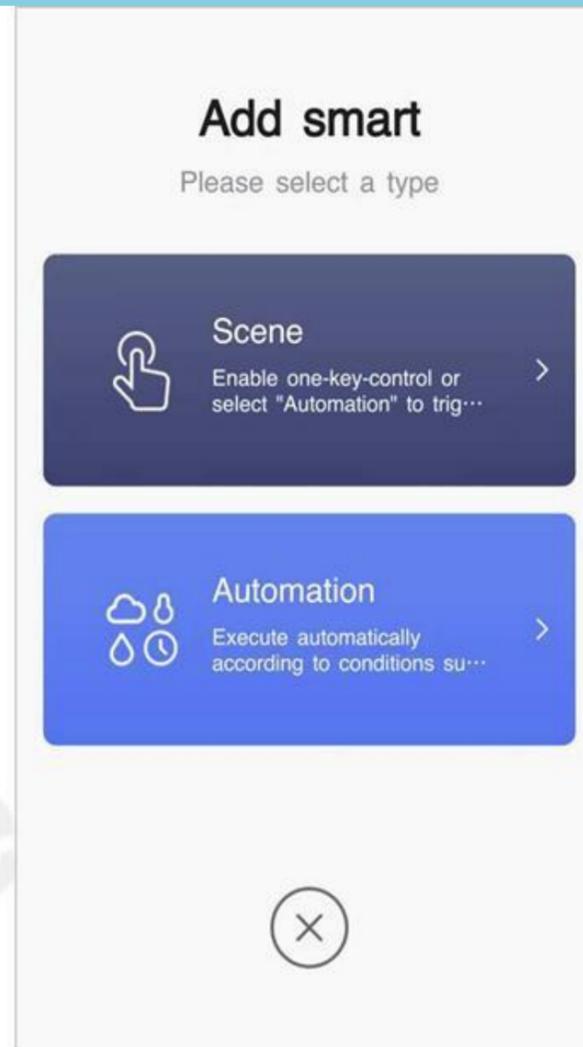


Fig. 2

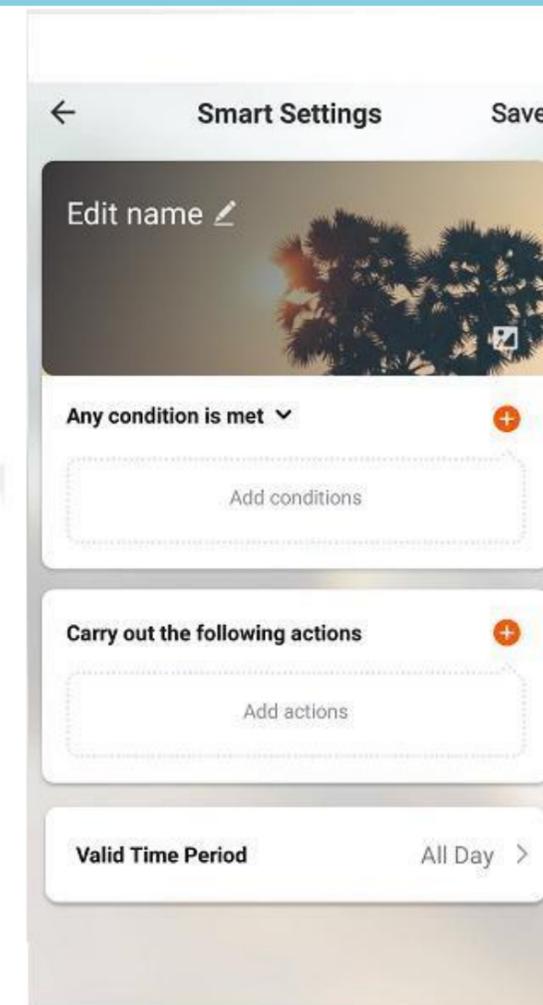


Fig. 3

NO.5.1 Smart Features - Automation

Add condition:

For example, to add temperature as a condition, select temperature as shown in Fig 1, configure temperature-related conditions as shown in Fig. 2, and then click "Next" to add the condition as shown in Fig. 3.

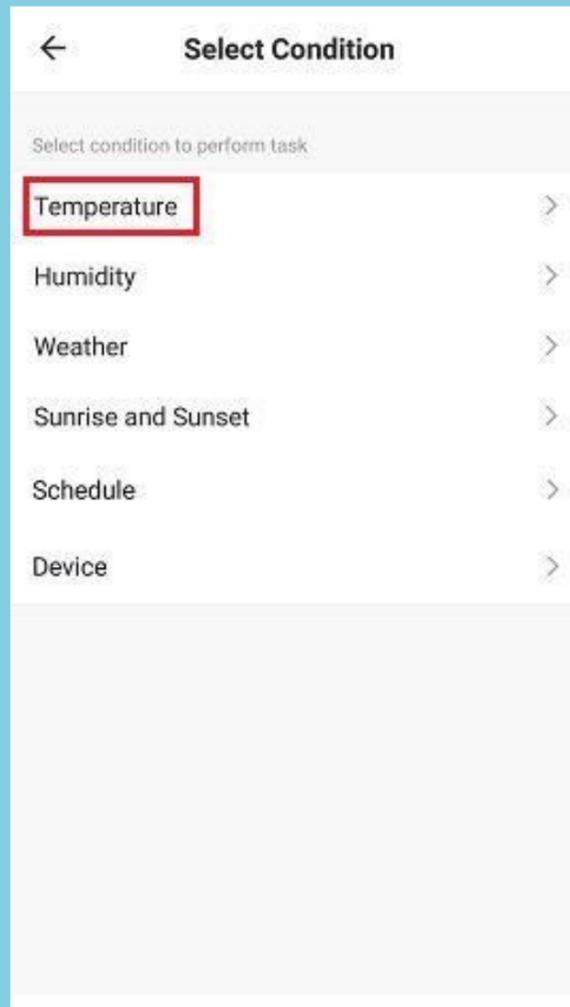


Fig. 1

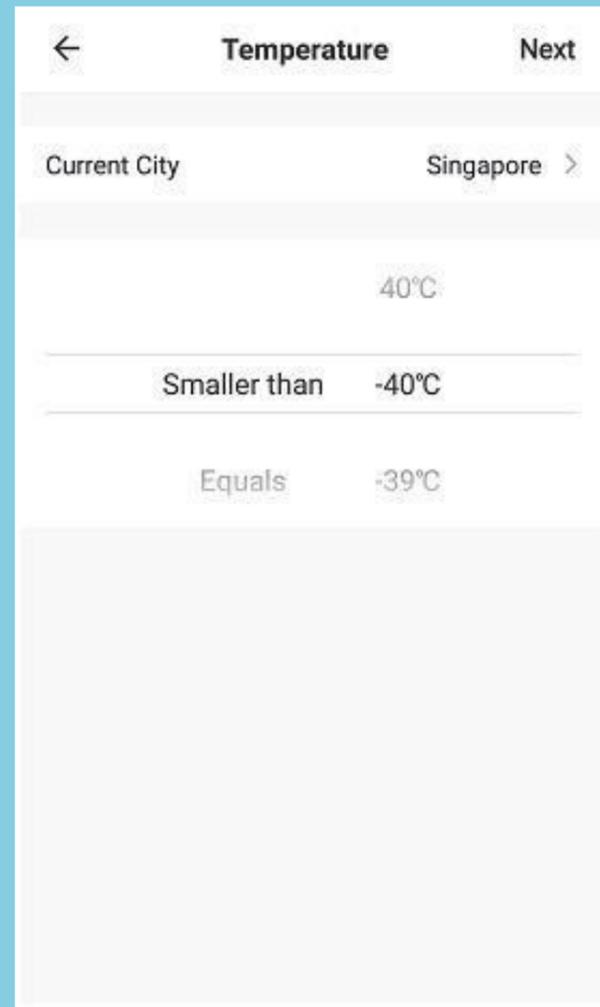


Fig. 2

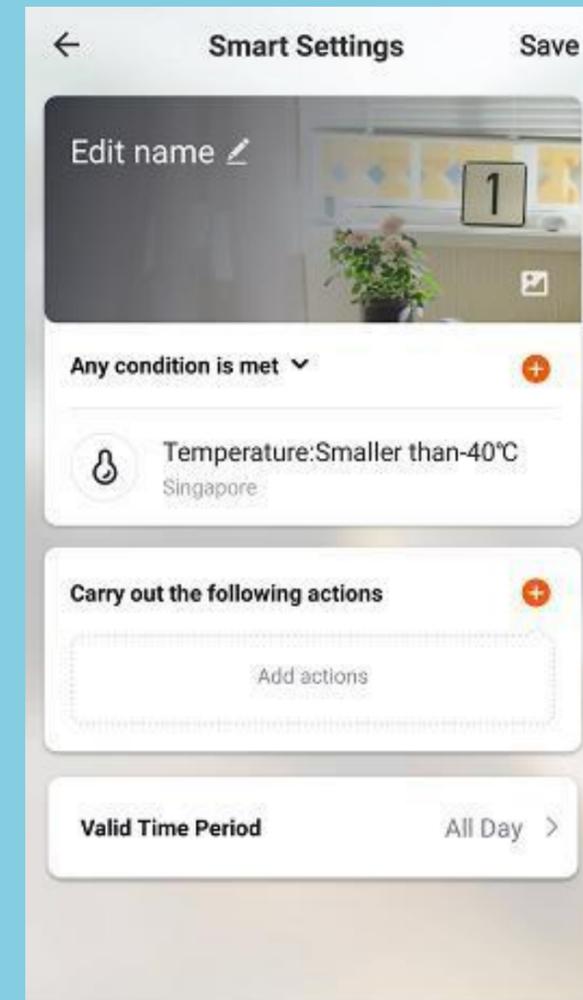


Fig. 3


NO.5.1 Smart Features - Automation

Add action:

Click "Add action" or "+" at the top right corner to open the menu, as shown on the left.

There are four action types:

Execute Scene, Trigger Automation, Send a reminder and Time-lapse.

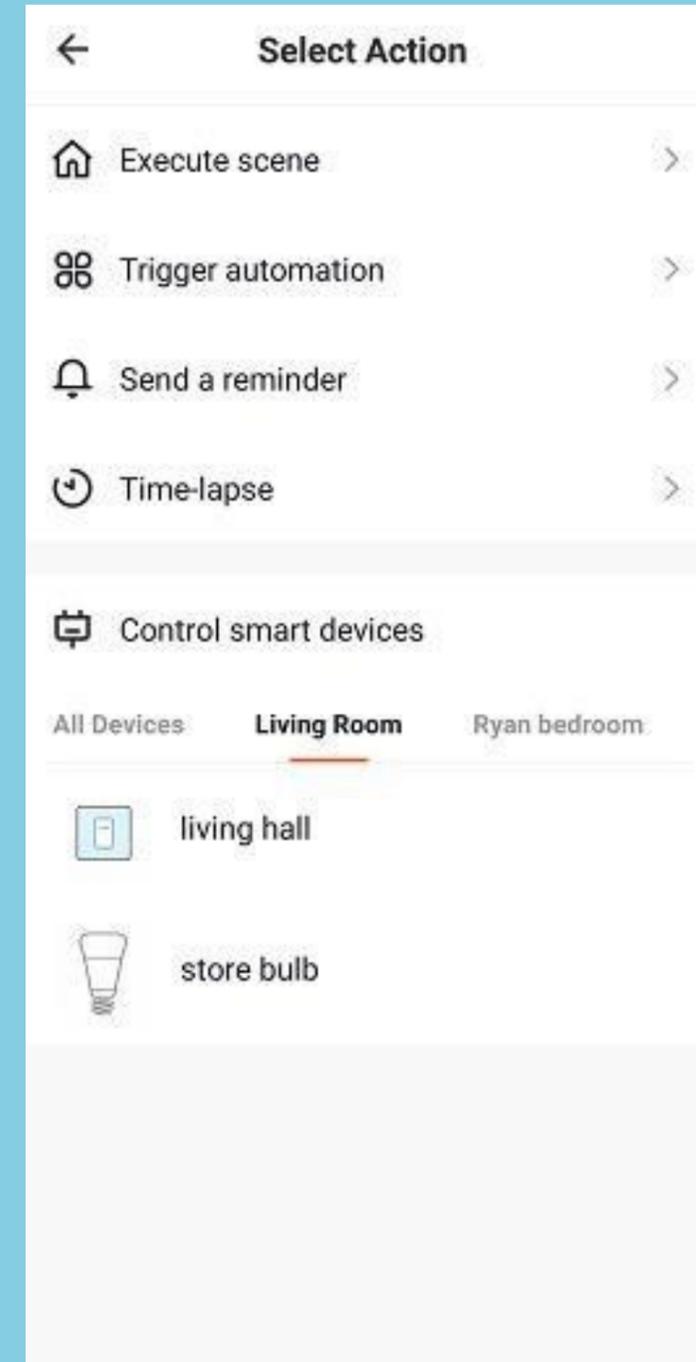

NO.5.2 Smart Features - Scene Settings

Select “Scene” as shown in Fig. 1 and go to the “Smart Settings” page. As shown in Fig. 2, you can edit the scene name. Click “Carry out the following actions” or “+” at the topright corner to add an action. The “Select Action” menu is shown in Fig. 3. is similar to that of Automation Settings.

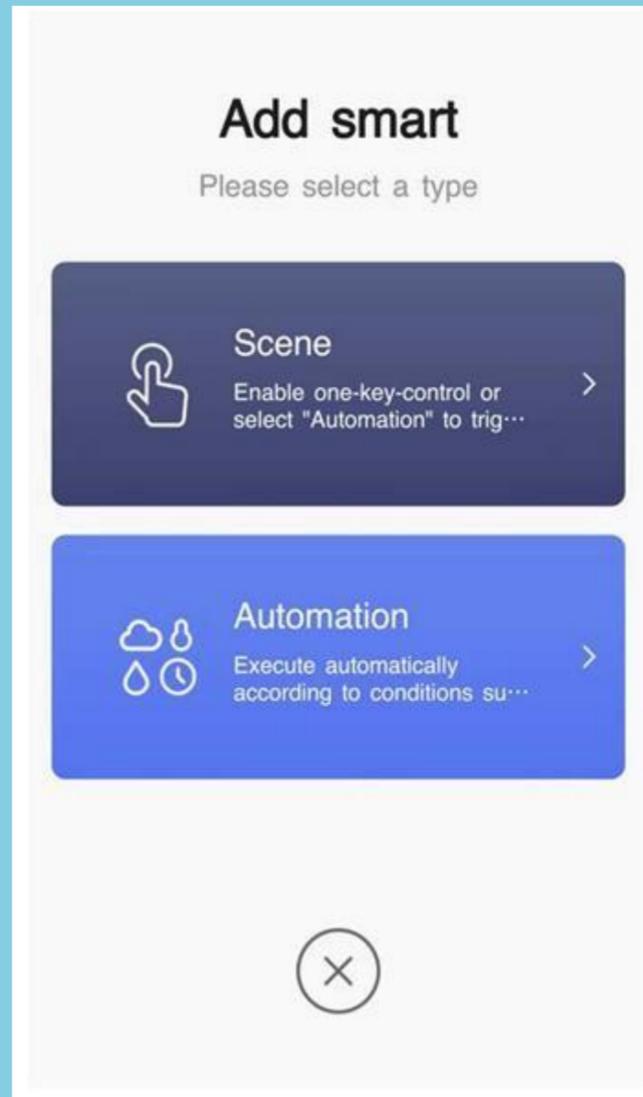


Fig. 1

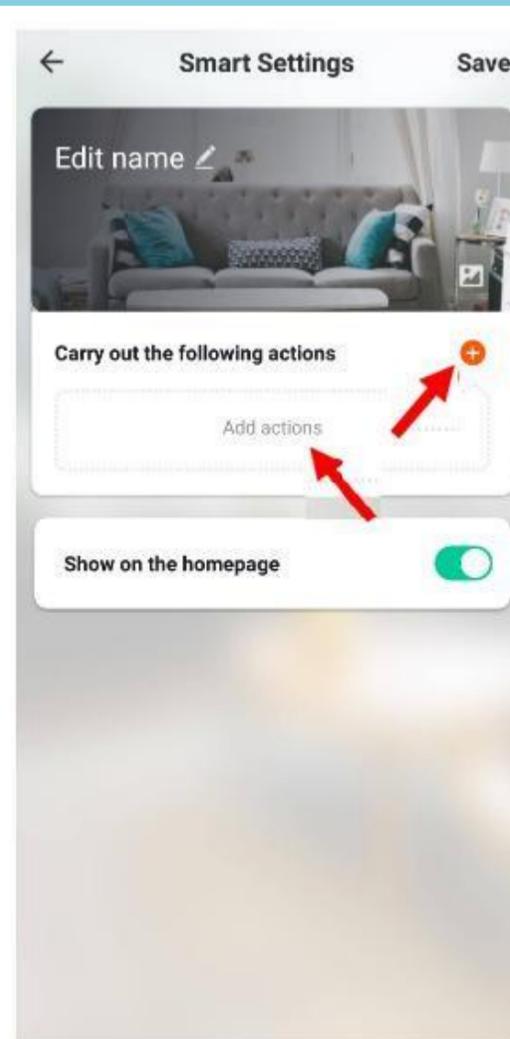


Fig. 2

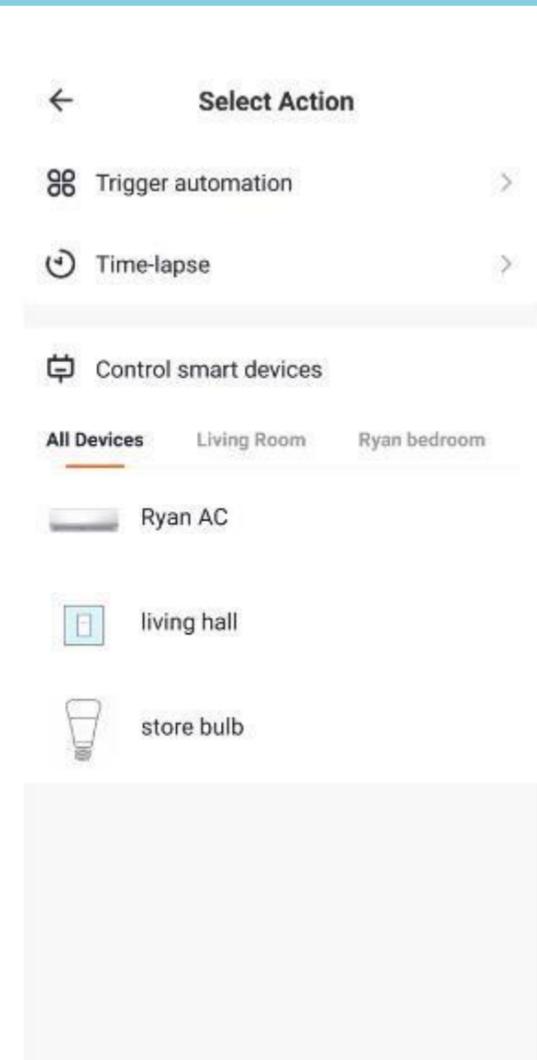


Fig. 3

NO.5.3 Smart Features - Add/Modify/Delete (under Scene)

Edit a scene: Click "..." as shown in Fig. 1 to go to the Edit page.

Edit page as shown in Fig.2 to add new conditions or actions, or delete the smart feature entirely.

In Fig. 3. Slide left to delete previously added conditions or actions.

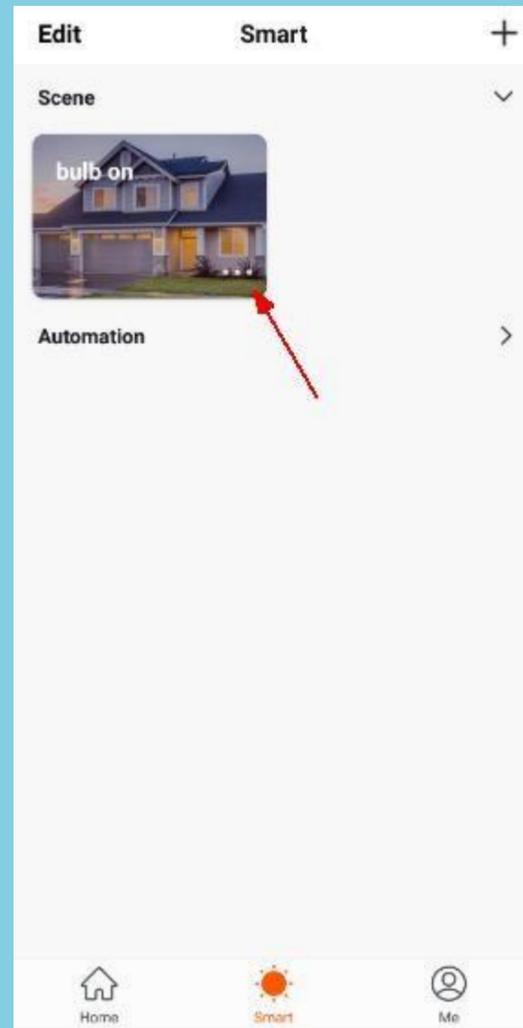


Fig. 1

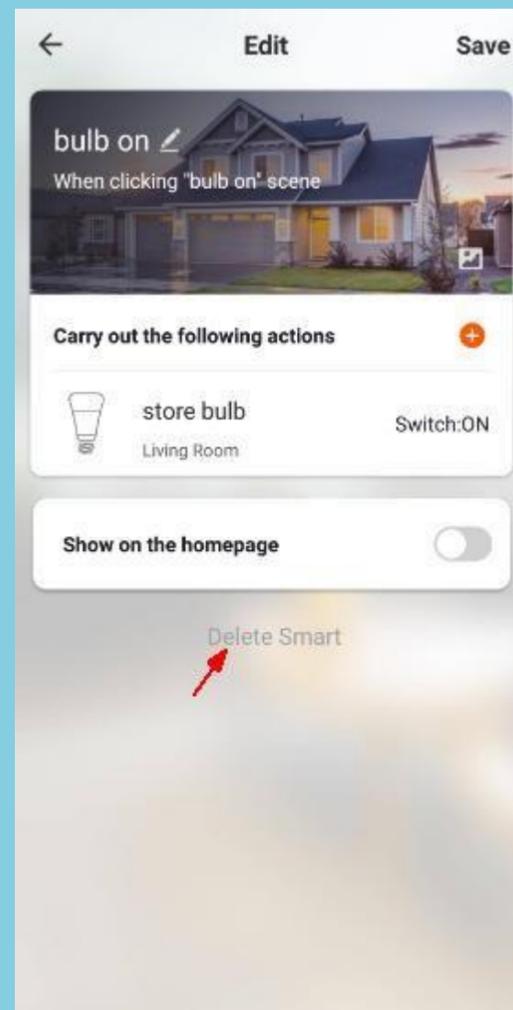


Fig. 2

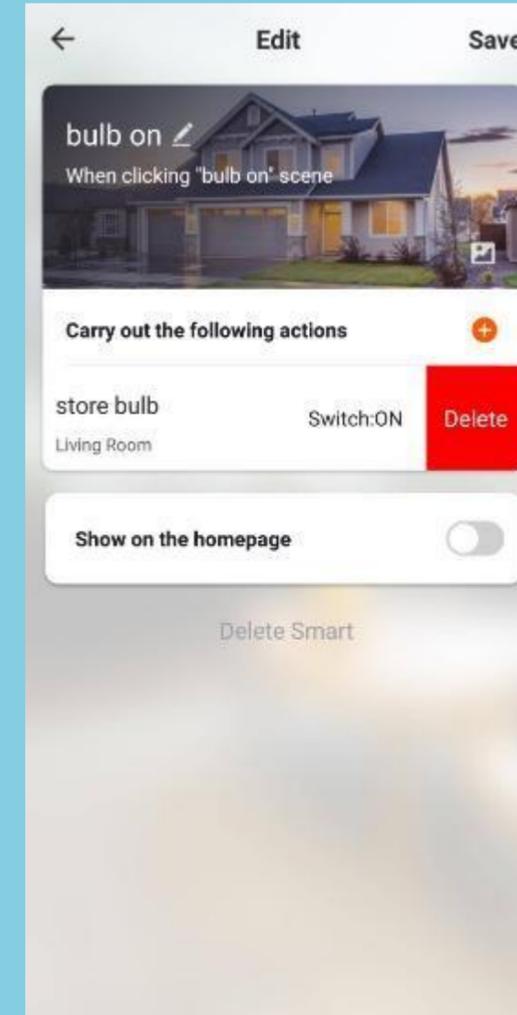


Fig. 3

NO.5.3 Smart Features - Add/Modify/Delete (under Automation)

Edit automation: Click anywhere on the background of automation, as shown in Fig. 1, to go to the Edit page. Edit page as shown in Fig.2 to add new conditions or actions, or delete the smart feature entirely.

In Fig. 3. Slide left to delete previously added conditions or actions.

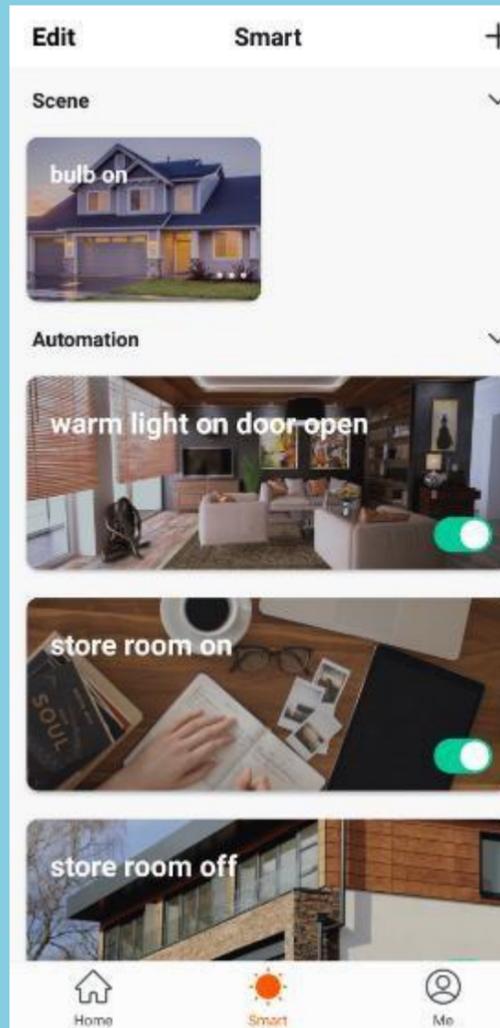


Fig. 1

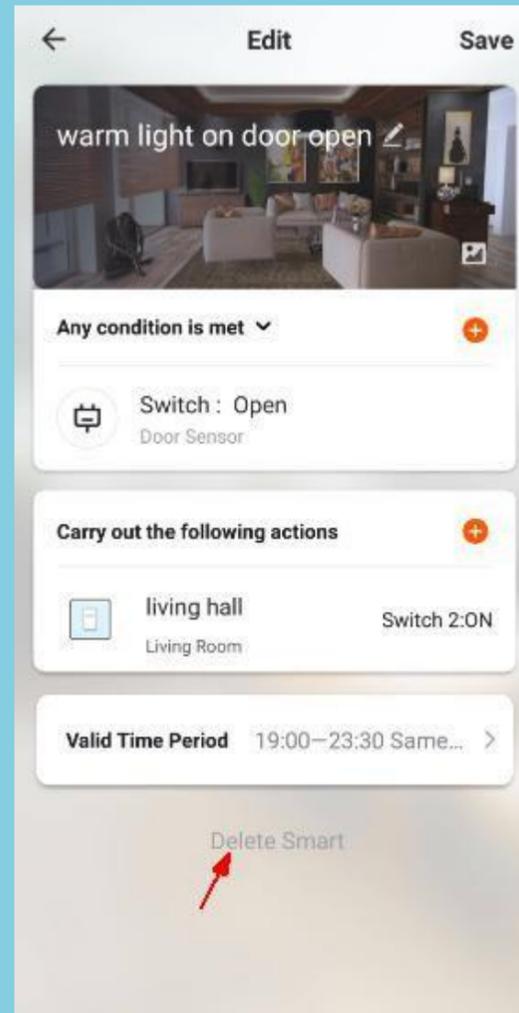


Fig. 2


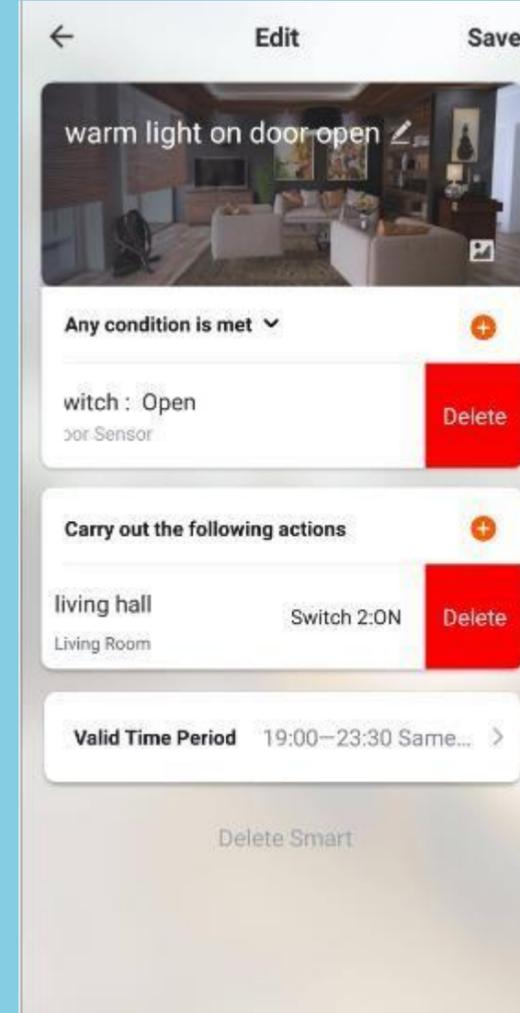


Fig. 3

NO.6 My Home

For users with multiple families
able to switch
between/add families

One-key activation for
smart scenes
Easy switch between
everyday scenes

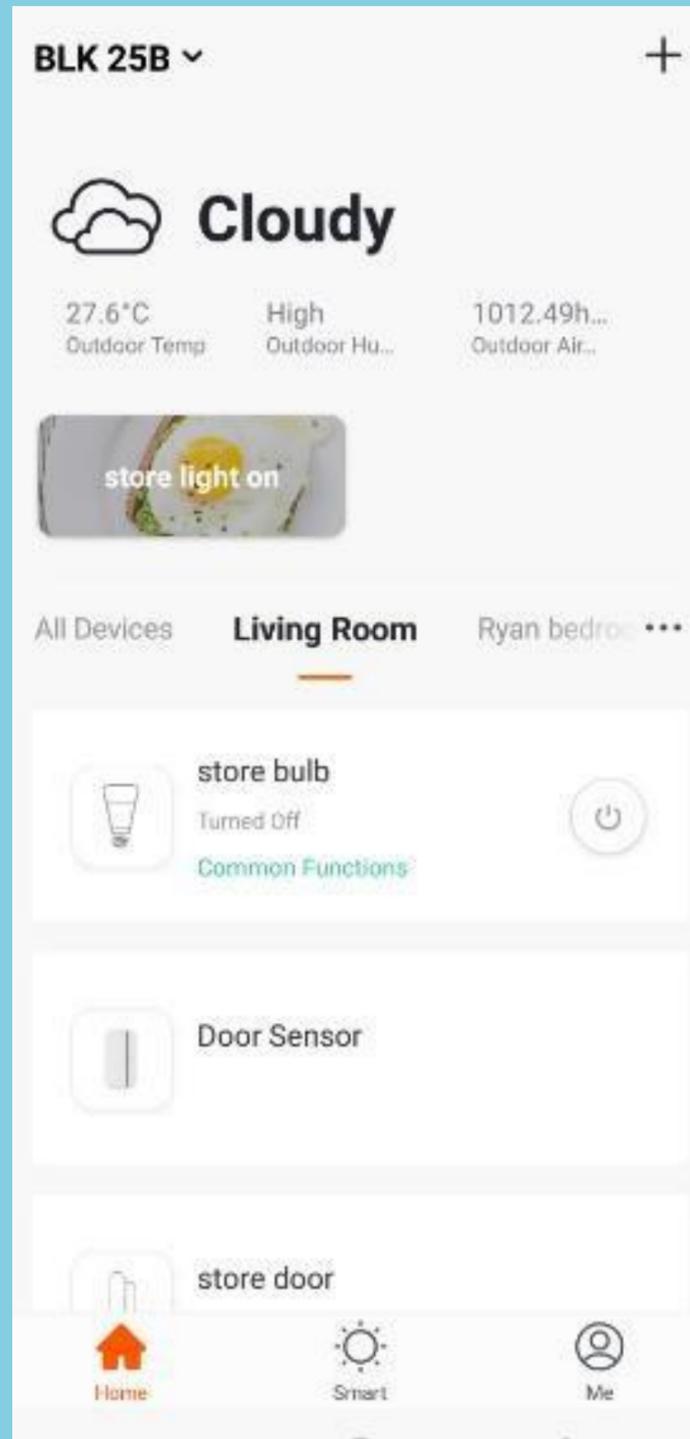


Add various types of
devices

Switch between rooms in a
household
View status of smart devices
in each room

NO.7 "Me" Page

Personal settings are the user's portal to managing personal information and shows the following information:



1. Home Management
2. Message Center: feedback results, shared news, and devices supporting notification
3. Help Center: FAQs. Feedback: Report problems encountered during usage here.
4. Settings

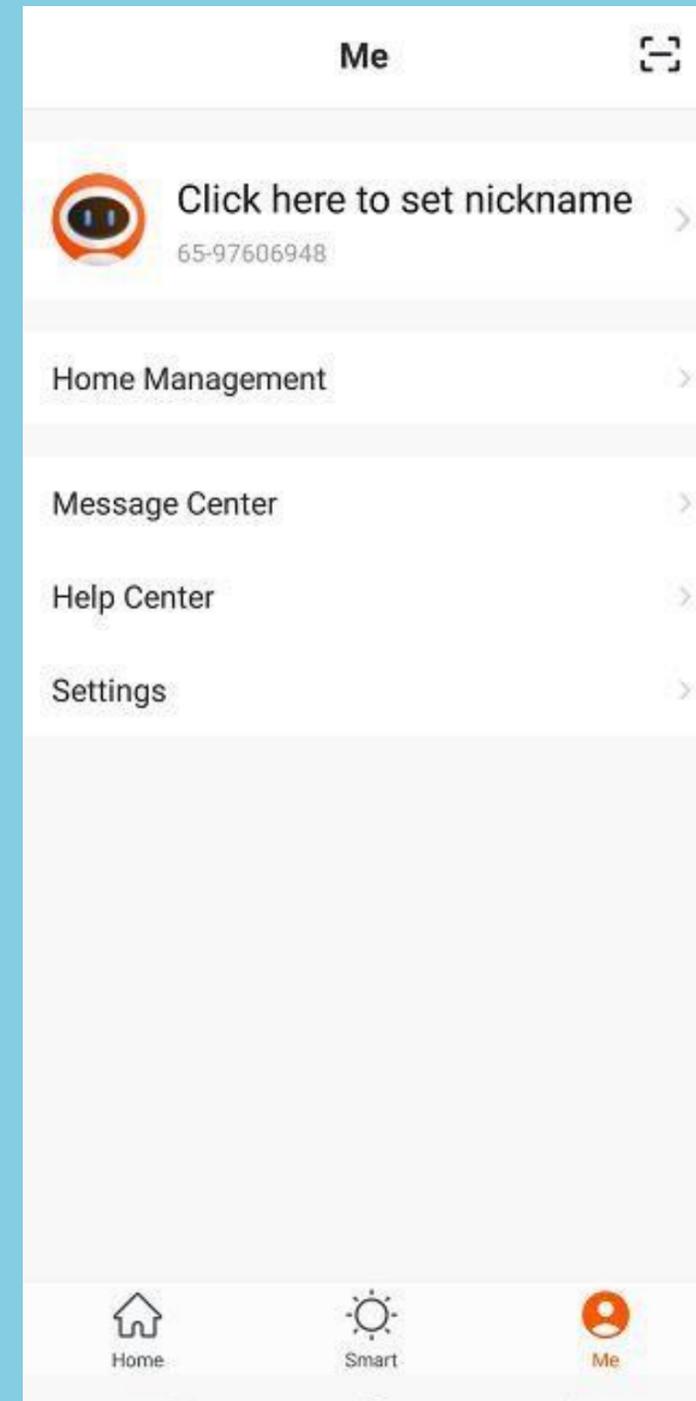

NO.7 Settings - About

The About page displays app information as follows:

1. Click "Rate us" to go to the app store and rate the app.
2. Current Version
3. Check for updates

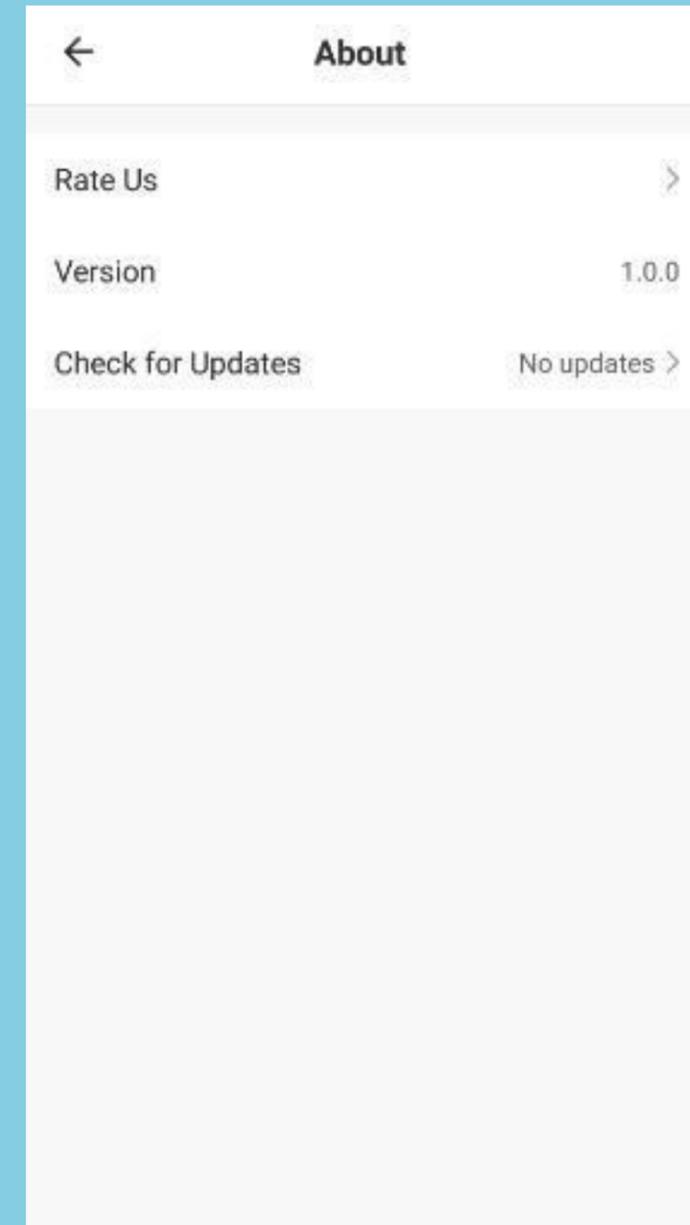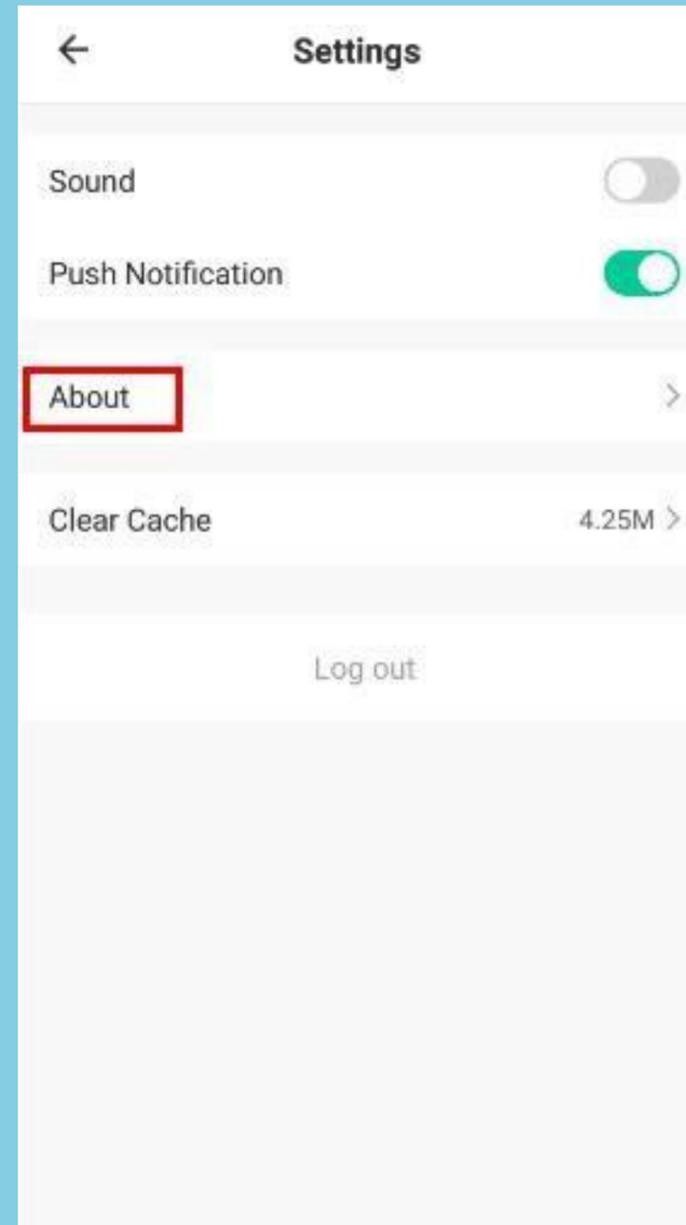

NO.7 Personal Center

Click anywhere on the background as indicated by the arrow in Fig 1.

The Personal center page in Fig 2 shows your account information. Here you can change your password, link your mobile number to your account, configure your gesture password, and deactivate your account

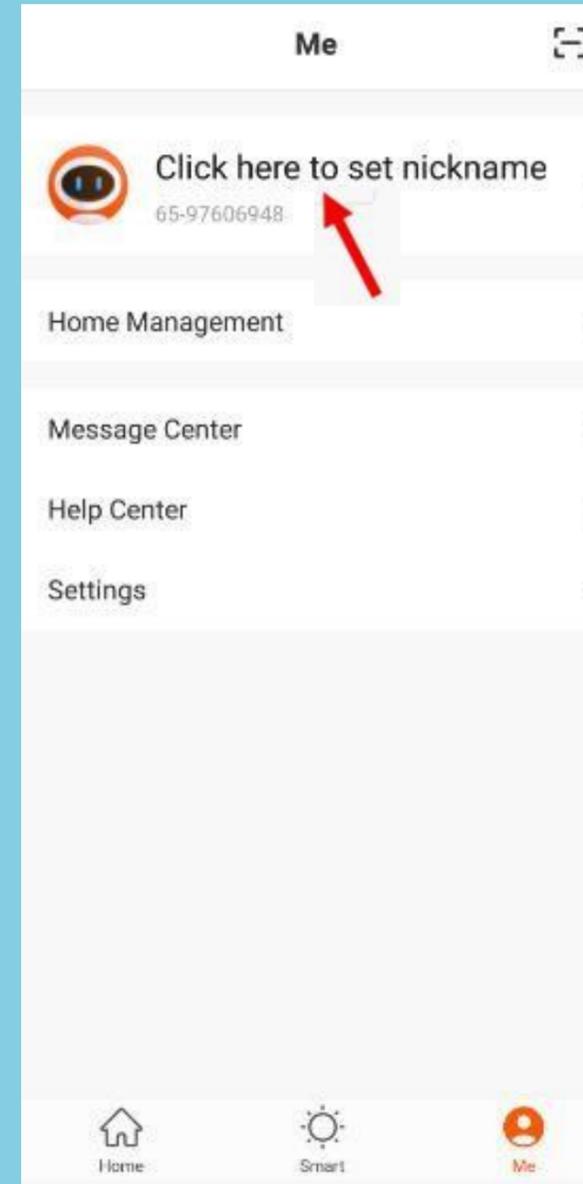


Fig. 1




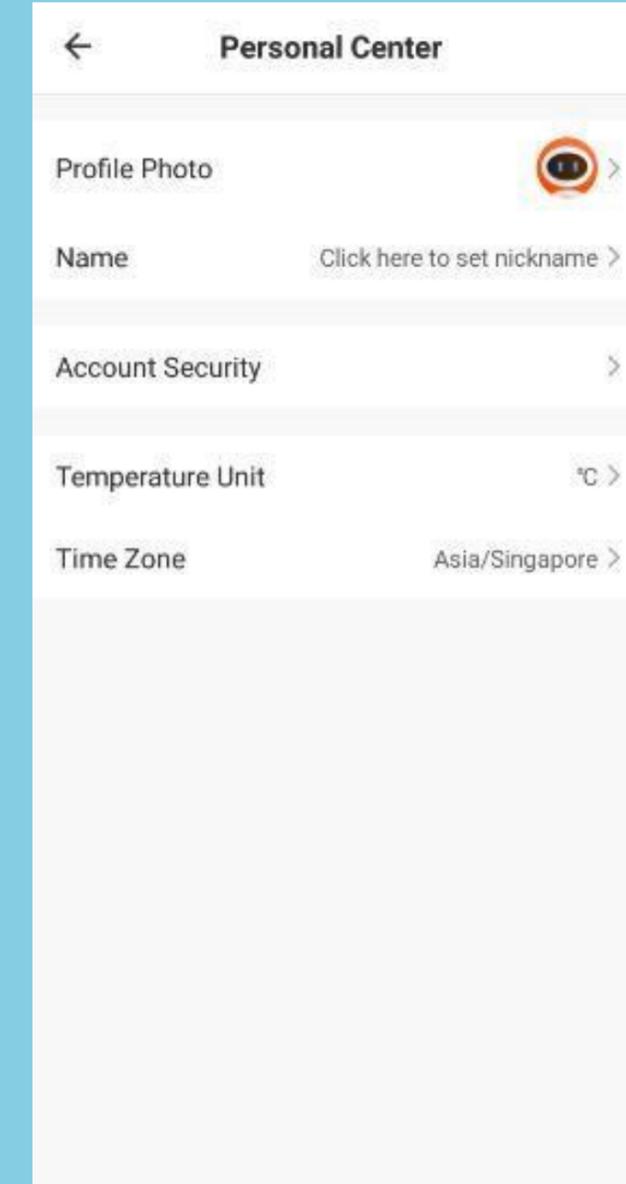


Fig. 2

NO.7 Personal center - Gesture password

Under Account Security, turn on "Gesture unlock" to set up a gesture password. Once a gesture password is activated, you will have to use the gesture to access the app. If you forgot your gesture password, click "Forgot the gesture password" to have an authentication code sent to your registered mobile phone number or your email. Enter the code and set up a new gesture password to continue.

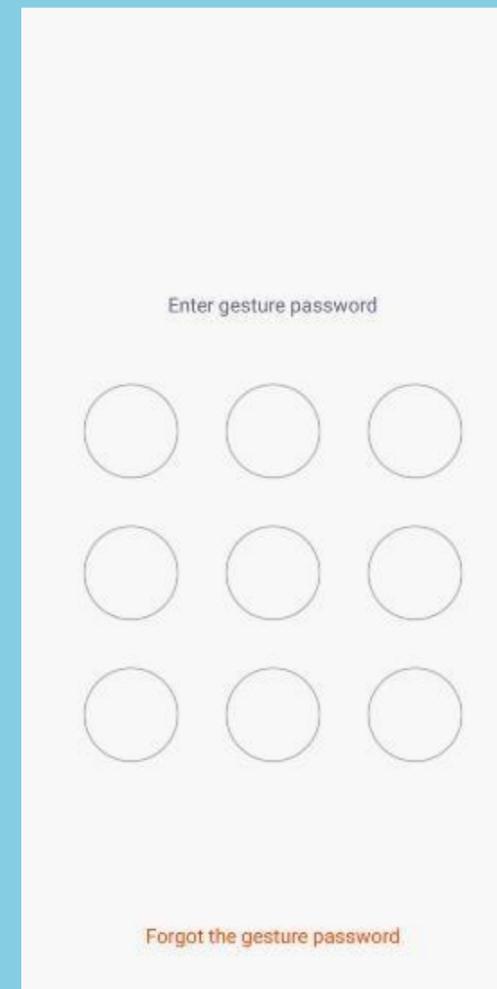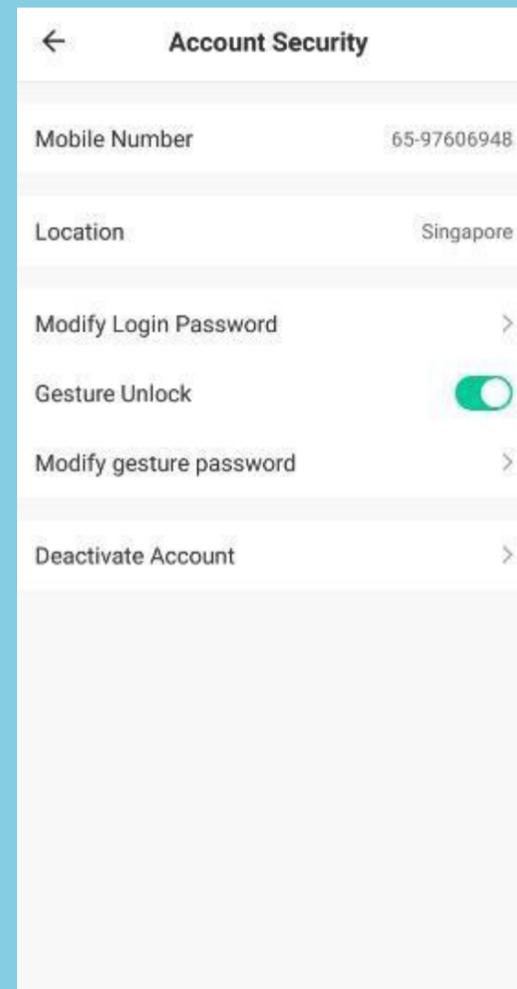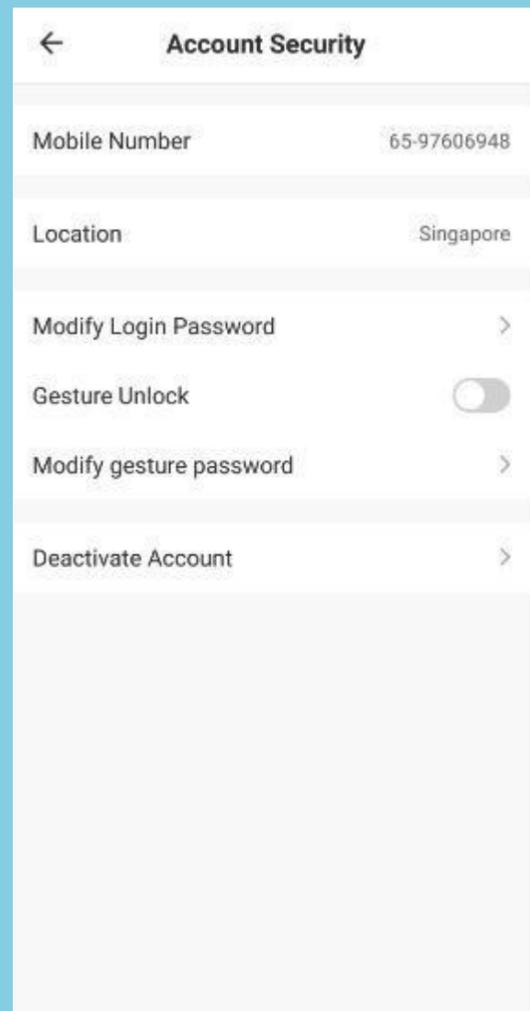

Notes:

- 1) All figures display Android interfaces. IOS versions may vary slightly.
- 2) Products and software are constantly being updated. Data and software interfaces shown here are for reference purposes only.
- 3) Further changes made will not be separately disclosed
- 4) Email us at support@digitalhome.ph