



4-Port PS/2 KVM Switch Kit with Audio TK-408K (v1.2R)

The 4-Port PS/2 Audio KVM Switch lets you control multimedia PCs with just one keyboard, monitor, mouse, microphone, and a set of speakers. The KVM switch not only allows you to share your monitor, keyboard and mouse but you can also share microphone and speakers. With just a simple press of a button, this KVM switch eliminates the hassle of cable swapping and switching between 4 PCs. With its Hot-Plug, Auto-Scan and Hot-Key operating features, the TK-408K is the perfect choice for managing 4 PCs. Separate KVM cables are included.

FEATURES

- Manage up to 4 computers/servers with one set of console devices
- PS/2 keyboard/mouse emulation with 4 sets of detachable KVM cables
- Compliant with Windows 98(SE)/ME/2000/XP/2003 Server/Vista and Linux
- High video quality, up to 2048 x 1536 resolution
- Listen to music from one computer while working on the other
- Auto-Scan and LED display for easy status monitoring
- Computer selection by face panel push buttons or keyboard hot key commands
- Keyboard status restored when switching between computers
- Plug & Play and hot-pluggable
- 2-year limited warranty



SPECIFICATIONS


HARDWARE	
Connections	<ul style="list-style-type: none">• 4 computers
Cables	<ul style="list-style-type: none">• 2 sets of 1.2m (4ft.) PS/2 KVM cables, 2 sets of 1.8m (6ft.) PS/2 KVM cables• 2 sets of 1.2m (4ft.) audio cable, 2 sets of 1.8m (6ft.) audio cable
Cable Interface (all male)	<ul style="list-style-type: none">• To KVM<ul style="list-style-type: none">• 1 x VGA/SVGA HDB 15-pin• 1 x 3.5mm speaker jack• 1 x 3.5mm microphone jack• To Computer<ul style="list-style-type: none">• 1 x PS/2 keyboard 6-pin mini din• 1 x PS/2 mouse 6-pin mini din• 1 X VGA/SVGA HDB 15-pin• 1 x 3.5mm speaker jack• 1 x 3.5mm microphone jack
PC Port Connections (all female)	<ul style="list-style-type: none">• 4 x VGA/SVGA HDB 15-pin• 4 x 3.5mm speaker jack• 4 x 3.5mm microphone jack
Console Port Connectors (all female)	<ul style="list-style-type: none">• 1 x PS/2 keyboard 6-pin mini din• 1 x PS/2 mouse 6-pin mini din• 1 x VGA/SVGA HDB 15-pin• 1 x 3.5mm speaker jack• 1 x 3.5mm microphone jack
Computer Selection	<ul style="list-style-type: none">• Front panel push buttons or keyboard hot key commands
Auto-Scan Interval	<ul style="list-style-type: none">• 5 seconds
Keyboard State	<ul style="list-style-type: none">• Save and restore
Power Type	<ul style="list-style-type: none">• PS/2 interface power
Dimensions	<ul style="list-style-type: none">• 167 x 80 x 28mm (6.6 x 3.2 x 1.1in.)
Weight	<ul style="list-style-type: none">• 178g (6.3oz.)
Temperature	<ul style="list-style-type: none">• Operating: 0°C ~ 40°C (32°F ~104°F)• Storage: -20°C ~ 60°C (-4°F ~140°F)
Humidity	<ul style="list-style-type: none">• 0%~90%, non-condensing
Certifications	<ul style="list-style-type: none">• CE, FCC

4-Port PS/2 KVM Switch Kit with Audio

TK-408K [v1.2R]



NETWORKING SOLUTIONS

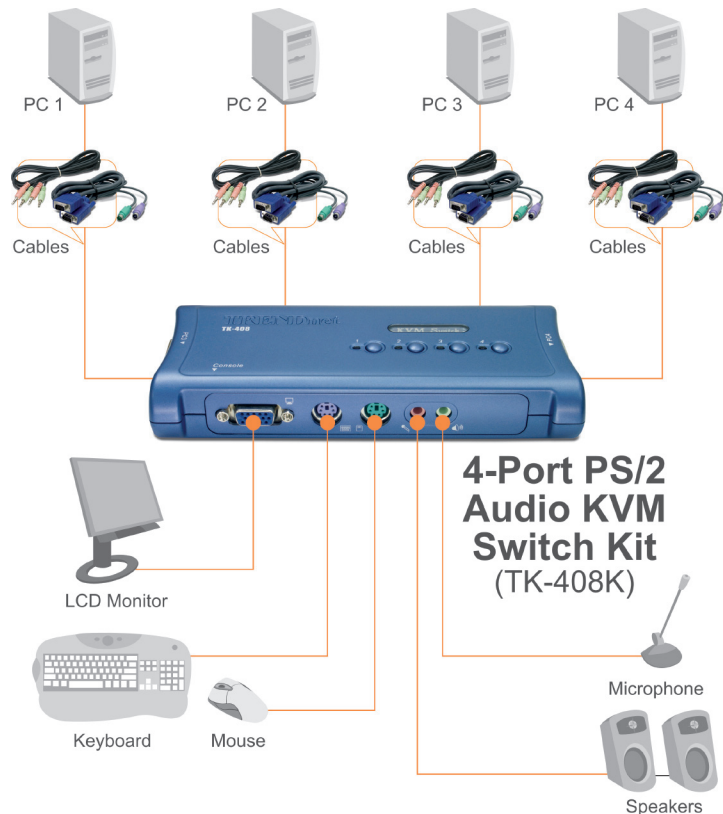

PACKAGE CONTENTS

TK-408K

Multi-Language Quick Installation Guide

4 sets of PS/2 KVM Cable (2 x 1.2m/4ft., 2 x 1.8m/6ft.)

4 sets of audio Cable (2 x 1.2m/4ft., 2 x 1.8m/6ft.)

RELATED PRODUCTS

TK-208K	2-Port PS/2 KVM Switch Kit w/ Audio
TK-407K	4-Port USB KVM Switch Kit
TK-409K	4-Port USB KVM Switch Kit with Audio

CONTACT INFORMATION

TRENDnet

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

1-888-326-6061

