




## FEATURES

- 8-channel input
- Third-party IP camera supported with ONVIF conformance
- HDMI and VGA output up to 1080P
- Up to 4 Megapixels resolution recording
- Accurate retrieval, instant playback
- 2 SATA Up To 12TB
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access

## DIMENTION

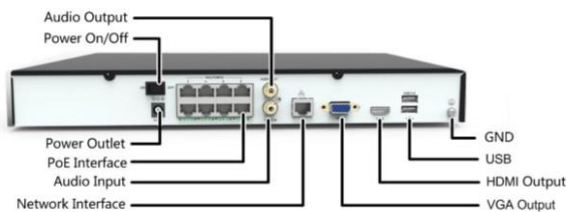

## SPECIFICATION

<b>Video and Audio</b>	
IP Video Input	8-ch
Two-way audio Input	1-ch, RCA
<b>Network</b>	
Incoming bandwidth	64Mbps
Outgoing bandwidth	96Mbps
Remote connection	128
<b>Video/Audio Output</b>	
HDMI/VGA Output	HDMI/VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768 /60Hz
Recording Resolution	4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch, RCA
Synchronous Playback	8-ch
<b>Decoding</b>	
Compression	H.264
Liveview/Playback	4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	4x4MP@20,6x1080p@25,16x720p@25
<b>Hard Disk</b>	
SATA	2 SATA Up To 12TB
Capacity	Up to 6 TB for each disk
<b>External Interface</b>	
Network Interface	1RJ-45 10M/100M/1000M self-adaptive Ethernet Interface
USB Interface	Rear panel: 1xUSB2.0, 1xUSB3.0
<b>PoE</b>	
Interface	8 independent 100Mbps PoE network interfaces
Supported Standard	IEEE802.3at
<b>General</b>	
Power Supply	52VDC
Consumption (without HDD)	≤8W
Working Temperature	-10°C~+55°C(+14°F~+131°F)
Working Humidity	10%~90%
Dimensions	44×360×254mm(1.7"×14.2"×10.0")
Weight (without HDD)	≤1.42Kg(3.13lb)

