


REACTON

FIRE SUPPRESSION

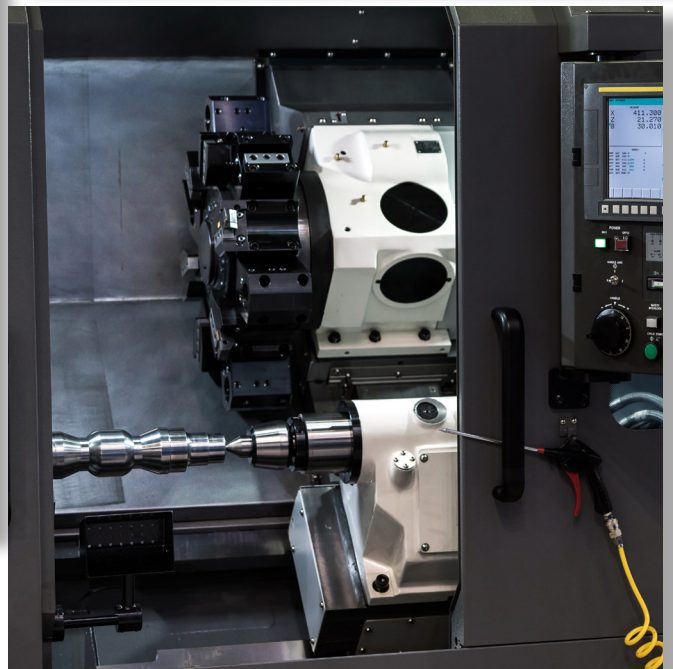

KIT OVERVIEW CATALOGUE

CNC PROTECTION KITS

DOC - CTG0019
01 MAY 2020 - REV A



RE1810



1 x 4.0KG INDIRECT 3M™ NOVEC™ 1230 CNC KIT

DESCRIPTION

The 4.0kg Indirect 3M™ Novec™ 1230 kit has been configured for your CNC applications.

The kit is for volumes up to 4.58m³ (5.9% @ 20°C)

All kits come complete with a factory filled and pressurised cylinder, Standard cylinder bracket and all fittings and fixings for a successful installation.

Items such as Manual Actuators, Shutdown, Isolation and Monitoring systems will need to be added separately.

BASIC SYSTEM CONFIGURATION



FULL BILL OF MATERIALS

QTY	PART NUMBER	DESCRIPTION
1	RE-CTXCE-054-040-FK5	25 bar CE - 4.0kg CTX Indirect 3M™ Novec™ 1230
1	RE6110	Reacton Branded Adhesive Caution Label 297 x 210
4	RE6111	Reacton Branded Adhesive Do Not Kink Label 58 x 72
1	RE6113	Reacton Adhesive Cylinder Maintenance Label A5
1	RE6948	90° Swl Elbow 3/8" Male - 3/8" BSPT
1	RE6951	BSP Male Bulkhead
10	RE6956	3/8" BSP Flat Washer
10	RE6957	3/8" BSP Shakeproof Washer
1	RE6964	3/8" - 3.00m Hose
1	RE6983	Elbow - 3/8" Male - 3/8" Female
1	RE7041	QR Twinseal Stud: 1/8" Threaded - 6/4mm Tube
35	RE7079	Self Drilling Screw 8mm x 25mm
1	RE7126	Tamper Seal
1	RE7115	Clean Agent Nozzle
5	RE7211	R80 4/6 RED Detection Tube
1	RE7224	Standard Bracket
17	RE7232	P-Clips: Steel Rubber Lined 6mm
10	RE7233	P-Clips: Steel Rubber Lined 19mm
2	RE7234	Component Bracket
1	RE7243-25	25 bar - End of the Line (EOL): 6/4mm Tube
1	RE7291	Reacton Integrated Valve Lock
1	RE7400	Adaptor - 3/8" Cone - 1/4" BSPP

1 x 6.0KG INDIRECT 3M™ NOVEC™ 1230 CNC KIT

DESCRIPTION

The 6.0kg Indirect 3M™ Novec™ 1230 kit has been configured for your CNC applications.

The kit is for volumes up to 6.88m³ (5.9% @ 20°C)

All kits come complete with a factory filled and pressurised cylinder, Standard cylinder bracket and all fittings and fixings for a successful installation.

Items such as Manual Actuators, Shutdown, Isolation and Monitoring systems will need to be added separately.

BASIC SYSTEM CONFIGURATION



FULL BILL OF MATERIALS

QTY	PART NUMBER	DESCRIPTION
1	RE-CTXCE-075-060-FK5	25 bar CE - 6.0kg CTX Indirect 3M™ Novec™ 1230
1	RE6110	Reacton Branded Adhesive Caution Label 297 x 210
4	RE6111	Reacton Branded Adhesive Do Not Kink Label 58 x 72
1	RE6113	Reacton Adhesive Cylinder Maintenance Label A5
2	RE6948	90° Swl Elbow 3/8" Male - 3/8" BSPT
2	RE6951	BSP Male Bulkhead
10	RE6956	3/8" BSP Flat Washer
10	RE6957	3/8" BSP Shakeproof Washer
2	RE6964	3/8" - 3.00m Hose
2	RE6983	Elbow - 3/8" Male - 3/8" Female
1	RE7041	QR Twinseal Stud: 1/8" Threaded - 6/4mm Tube
45	RE7079	Self Drilling Screw 8mm x 25mm
1	RE7126	Tamper Seal
2	RE7115	Clean Agent Nozzle
5	RE7211	R80 4/6 RED Detection Tube
1	RE7224	Standard Bracket
17	RE7232	P-Clips: Steel Rubber Lined 6mm
20	RE7233	P-Clips: Steel Rubber Lined 19mm
3	RE7234	Component Bracket
1	RE7243-25	25 bar - End of the Line (EOL): 6/4mm Tube
1	RE7291	Reacton Integrated Valve Lock
2	RE7400	Adaptor - 3/8" Cone - 1/4" BSPP

1 x 9.0KG INDIRECT 3M™ NOVEC™ 1230 CNC KIT

DESCRIPTION

The 9.0kg Indirect 3M™ Novec™ 1230 kit has been configured for your CNC applications.

The kit is for volumes up to 10.32m³ (5.9% @ 20°C)

All kits come complete with a factory filled and pressurised cylinder, Standard cylinder bracket and all fittings and fixings for a successful installation.

Items such as Manual Actuators, Shutdown, Isolation and Monitoring systems will need to be added separately.

BASIC SYSTEM CONFIGURATION



FULL BILL OF MATERIALS

QTY	PART NUMBER	DESCRIPTION
1	RE-CTXCE-120-090-FK5	25 bar CE - 90kg CTX Indirect 3M™ Novec™ 1230
1	RE6110	Reacton Branded Adhesive Caution Label 297 x 210
4	RE6111	Reacton Branded Adhesive Do Not Kink Label 58 x 72
1	RE6113	Reacton Adhesive Cylinder Maintenance Label A5
2	RE6948	90° Swl Elbow 3/8" Male - 3/8" BSPT
2	RE6951	BSP Male Bulkhead
10	RE6956	3/8" BSP Flat Washer
10	RE6957	3/8" BSP Shakeproof Washer
2	RE6964	3/8" - 3.00m Hose
2	RE6983	Elbow - 3/8" Male - 3/8" Female
1	RE7041	QR Twinseal Stud: 1/8" Threaded - 6/4mm Tube
45	RE7079	Self Drilling Screw 8mm x 25mm
1	RE7126	Tamper Seal
2	RE7116	Clean Agent Nozzle
5	RE7211	R80 4/6 RED Detection Tube
1	RE7224	Standard Bracket
17	RE7232	P-Clips: Steel Rubber Lined 6mm
20	RE7233	P-Clips: Steel Rubber Lined 19mm
3	RE7234	Component Bracket
1	RE7243-25	25 bar - End of the Line (EOL): 6/4mm Tube
1	RE7291	Reacton Integrated Valve Lock
2	RE7400	Adaptor - 3/8" Cone - 1/4" BSPP

1 x 4.0KG INDIRECT FM-200™ CNC KIT

DESCRIPTION

The 4.0kg Indirect FM-200™ kit has been configured for your CNC applications.

The kit is for volumes up to 5.55m³ (9.0% @ 20°C)

All kits come complete with a factory filled and pressurised cylinder, Standard cylinder bracket and all fittings and fixings for a successful installation.

Items such as Manual Actuators, Shutdown, Isolation and Monitoring systems will need to be added separately.

BASIC SYSTEM CONFIGURATION



FULL BILL OF MATERIALS

QTY	PART NUMBER	DESCRIPTION
1	RE-CTXCE-054-040-HFC	25 bar CE - 4.0kg CTX Indirect FM-200™
1	RE6110	Reacton Branded Adhesive Caution Label 297 x 210
4	RE6111	Reacton Branded Adhesive Do Not Kink Label 58 x 72
1	RE6113	Reacton Adhesive Cylinder Maintenance Label A5
1	RE6948	90° Swl Elbow 3/8" Male - 3/8" BSPT
1	RE6951	BSP Male Bulkhead
10	RE6956	3/8" BSP Flat Washer
10	RE6957	3/8" BSP Shakeproof Washer
1	RE6964	3/8" - 3.00m Hose
1	RE6983	Elbow - 3/8" Male - 3/8" Female
1	RE7041	QR Twinseal Stud: 1/8" Threaded - 6/4mm Tube
35	RE7079	Self Drilling Screw 8mm x 25mm
1	RE7126	Tamper Seal
1	RE7115	Clean Agent Nozzle
5	RE7211	R80 4/6 RED Detection Tube
1	RE7224	Standard Bracket
17	RE7232	P-Clips: Steel Rubber Lined 6mm
10	RE7233	P-Clips: Steel Rubber Lined 19mm
2	RE7234	Component Bracket
1	RE7243-25	25 bar - End of the Line (EOL): 6/4mm Tube
1	RE7291	Reacton Integrated Valve Lock
1	RE7400	Adaptor - 3/8" Cone - 1/4" BSPP

1 x 6.0KG INDIRECT FM-200™ CNC KIT

DESCRIPTION

The 6.0kg Indirect FM-200™ kit has been configured for your CNC applications.

The kit is for volumes up to 8.32m³ (9.0% @ 20°C)

All kits come complete with a factory filled and pressurised cylinder, Standard cylinder bracket and all fittings and fixings for a successful installation.

Items such as Manual Actuators, Shutdown, Isolation and Monitoring systems will need to be added separately.

BASIC SYSTEM CONFIGURATION



FULL BILL OF MATERIALS

QTY	PART NUMBER	DESCRIPTION
1	RE-CTXCE-075-060-HFC	25 bar CE - 6.0kg CTX Indirect FM-200™
1	RE6110	Reacton Branded Adhesive Caution Label 297 x 210
4	RE6111	Reacton Branded Adhesive Do Not Kink Label 58 x 72
1	RE6113	Reacton Adhesive Cylinder Maintenance Label A5
2	RE6948	90° Swl Elbow 3/8" Male - 3/8" BSPT
2	RE6951	BSP Male Bulkhead
10	RE6956	3/8" BSP Flat Washer
10	RE6957	3/8" BSP Shakeproof Washer
2	RE6964	3/8" - 3.00m Hose
2	RE6983	Elbow - 3/8" Male - 3/8" Female
1	RE7041	QR Twinseal Stud: 1/8" Threaded - 6/4mm Tube
45	RE7079	Self Drilling Screw 8mm x 25mm
1	RE7126	Tamper Seal
2	RE7115	Clean Agent Nozzle
5	RE7211	R80 4/6 RED Detection Tube
1	RE7224	Standard Bracket
17	RE7232	P-Clips: Steel Rubber Lined 6mm
20	RE7233	P-Clips: Steel Rubber Lined 19mm
3	RE7234	Component Bracket
1	RE7243-25	25 bar - End of the Line (EOL): 6/4mm Tube
1	RE7291	Reacton Integrated Valve Lock
2	RE7400	Adaptor - 3/8" Cone - 1/4" BSPP

1 x 9.0KG INDIRECT FM-200™ CNC KIT

DESCRIPTION

The 9.0kg Indirect FM-200™ kit has been configured for your CNC applications.

The kit is for volumes up to 12.48m³ (9.0% @ 20°C)

All kits come complete with a factory filled and pressurised cylinder, Standard cylinder bracket and all fittings and fixings for a successful installation.

Items such as Manual Actuators, Shutdown, Isolation and Monitoring systems will need to be added separately.

BASIC SYSTEM CONFIGURATION



FULL BILL OF MATERIALS

QTY	PART NUMBER	DESCRIPTION
1	RE-CTXCE-120-090-HFC	25 bar CE - 90kg CTX Indirect FM-200™
1	RE6110	Reacton Branded Adhesive Caution Label 297 x 210
4	RE6111	Reacton Branded Adhesive Do Not Kink Label 58 x 72
1	RE6113	Reacton Adhesive Cylinder Maintenance Label A5
2	RE6948	90° Swl Elbow 3/8" Male - 3/8" BSPT
2	RE6951	BSP Male Bulkhead
10	RE6956	3/8" BSP Flat Washer
10	RE6957	3/8" BSP Shakeproof Washer
2	RE6964	3/8" - 3.00m Hose
2	RE6983	Elbow - 3/8" Male - 3/8" Female
1	RE7041	QR Twinseal Stud: 1/8" Threaded - 6/4mm Tube
45	RE7079	Self Drilling Screw 8mm x 25mm
1	RE7126	Tamper Seal
2	RE7116	Clean Agent Nozzle
5	RE7211	R80 4/6 RED Detection Tube
1	RE7224	Standard Bracket
17	RE7232	P-Clips: Steel Rubber Lined 6mm
20	RE7233	P-Clips: Steel Rubber Lined 19mm
3	RE7234	Component Bracket
1	RE7243-25	25 bar - End of the Line (EOL): 6/4mm Tube
1	RE7291	Reacton Integrated Valve Lock
2	RE7400	Adaptor - 3/8" Cone - 1/4" BSPP

REACTON

FIRE SUPPRESSION

Protecting your future, today



REACTON EUROPE

Address: 14 Baynes Place, Waterhouse Business Park, Chelmsford, Essex, CM1 2QX, United Kingdom

Phone: +44 (0) 1245 930 296

email: info@reactonfire.com

web: www.reactonfire.com

REACTON NORTH AMERICA

Address: 23335 N 18th Dr #140, Phoenix, AZ 85027, USA

Phone: +1 844 732 2866

email: info@reactonfire.com

web: www.reactonfire.com

REACTON UNITED ARAB EMIRATES

Address: Business Center, Building A3, Dubai World Central, Dubai, United Arab Emirates

Phone: +971 50 236 2357

email: info@reactonfire.ae

web: www.reactonfire.ae



REACTON SYSTEMS PROTECT

- On-Road and Off-Road Vehicles
- Residential Kitchens
- Manufacturing and Machining Equipment
- Industrial Equipment
- Heavy Equipment
- Power Generation
- Data Centres
- Electrical Control Cabinets

