

### Free Warranty Extended


Reister your product for a **FREE** upgrade to a 24 Month Warranty:

<https://tobenone.com/warranty>

### THANK YOU!

Thank you for purchasing TobenONE DisplayLink Docking Station UDS033B! Our dock provides the ability to connect up to quad monitors for Windows laptop/triple monitors for macOS, 6 USB peripherals, SD/TF, Gigabit Ethernet, and 3.5mm audio devices to your laptop via one single USB C cable.

### Ports and connectors

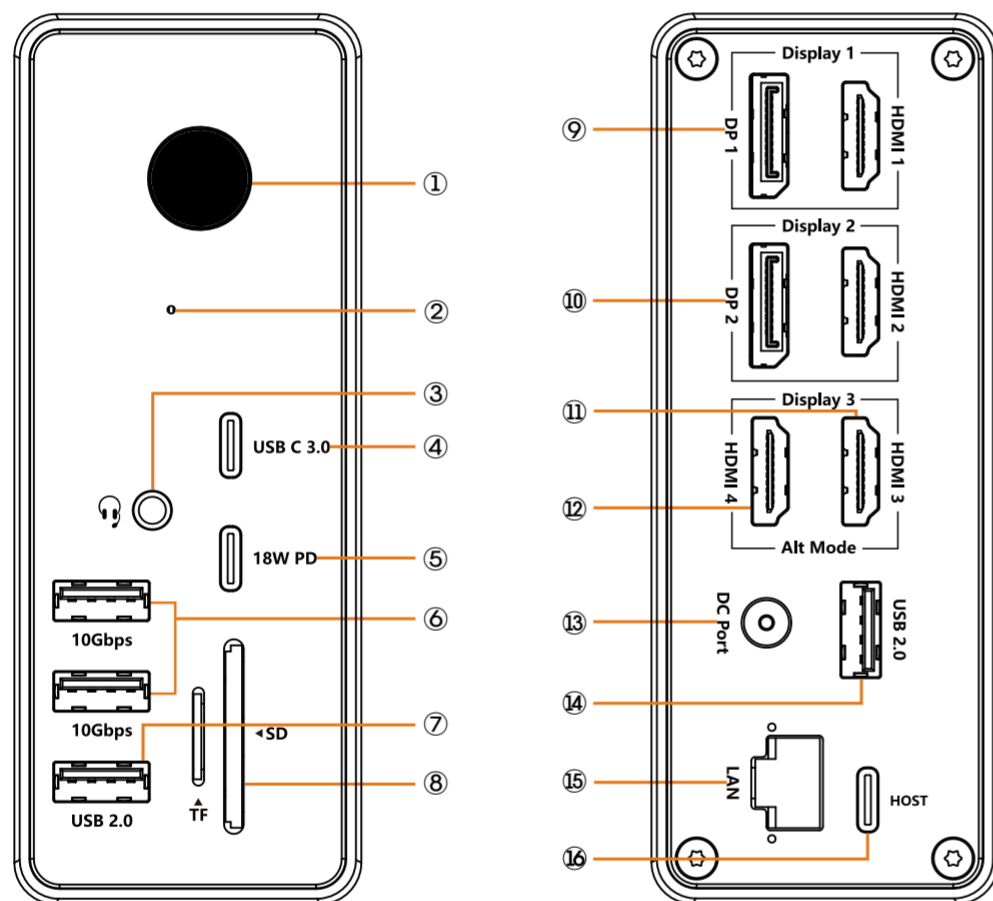

- ① Power Button: Control dock power on/off
- ② Green Power LED
- ③ 3.5mm Audio: Support mic&audio-out
- ④ USB C 3.0: Speed up to 5Gbps
- ⑤ USB C 3.0: Speed up to 5Gbps, also support 18W PD output
- ⑥ USB A 3.2\*2: Speed up to 10Gbps
- ⑦ USB A 2.0: For wireless devices
- ⑧ SD/MicroSD 3.0 Slot: Support SD&TF work simultaneously
- ⑨ Display 1: HDMI 1 or DP 1, resolution up to 2K@60Hz(driver-based)
- ⑩ Display 2: HDMI 2 or DP 2, resolution up to 2K@60Hz(driver-based)
- ⑪ HDMI 3: resolution up to 4K@60Hz(Plug-and-Play)
- ⑫ HDMI 4: resolution up to 4K@60Hz(Plug-and-Play)
- ⑬ DC Port: Connect the included power adapter, support 100W output
- ⑭ USB A 2.0: For wireless devices
- ⑮ LAN Port: Speed up to 1000Mbps
- ⑯ HOST Port: Connect to the laptop



Any questions, we are here to help!

Email: [support@tobenone.com](mailto:support@tobenone.com)

The only question we can't fix is the one we don't know

**Step 1:** Before connect the dock, please install the DisplayLink driver by visting: <https://www.synaptics.com/products/displaylink-graphics>  
You also can scan the right QR code and send it to laptop.



⚠ For macOS, after installing the DisplayLink driver, need to open Security&Privacy--Screen Recording--Allow DisplayLink manager to join. This dock uses screen recording to display the screen. Since the screen is recording, cannot watch any HDCP content from Netflix/Prime/iTunes/Hulu/etc. If you watch Non-HDCP content, the dock will allow you to watch Youtube/Netflix/Prime/iTunes/Hulu/etc

**Step 2:** Connect the 120W power adapter to the dock's DC port (⑬)

**Step 3:** Use the USB C cable coming with the dock to connect the dock and laptop via HOST port (⑯)

**Step 4:** Connect display 1 via HDM 1 or DP 1 port(⑨),connect display 2 via HDMI 2 or DP 2 port (⑩), connect display 3/4 via HDMI 3 and HDMI 4 port(⑪,⑫)

### Quad Displays Configuration



**Step 5:** Attach USB-C devices to the USB-C ports(④,⑤).And attach USB devices(USB driver, keyboard, mouse, printer, etc.) to the USB ports(⑥,⑦,⑭)

**step 6:** Connect the speaker, headphones, or microphone to the audio port(③). And connect the ethernet cable to the ethernet port(⑮).

**step 7:** Turn on the power button(①)

### USB-C DP Alt Mode (DP1.4)

Item	Display 1		Display 2		Display 3	Display 4
	HDMI 1	DP 1	HDMI 2	DP 2	HDMI 3	HDMI 4
Quad Display for Windows	2K/60Hz		2K/60Hz		4K/60Hz	4K/60Hz
	2K/60Hz			2K/60Hz	4K/60Hz	4K/60Hz
		2K/60Hz	2K/60Hz		4K/60Hz	4K/60Hz
		2K/60Hz		2K/60Hz	4K/60Hz	4K/60Hz
Triple Display for MacBook	2K/60Hz		2K/60Hz		4K/60Hz	
	2K/60Hz		2K/60Hz			4K/60Hz
	2K/60Hz			2K/60Hz	4K/60Hz	
	2K/60Hz			2K/60Hz		4K/60Hz
		2K/60Hz	2K/60Hz		4K/60Hz	
		2K/60Hz	2K/60Hz			4K/60Hz
		2K/60Hz		2K/60Hz	4K/60Hz	
		2K/60Hz		2K/60Hz		4K/60Hz

⚠1: HDMI 1 and DP 1 cannot be used at the same time

⚠2: HDMI 2 and DP 2 cannot be used at the same time

⚠3: Full-function Windows laptop can extend up to 4 displays, must confirm laptop's USB C port support display. If laptop's USB C port don't support display, HDMI 3 and HDMI 4 cannot work

⚠4: MacBook only can extend up to 3 displays, HDMI 3 and HDMI 4 cannot work simultaneously

⚠5: All video ports support landscape mode. The driver-based video ports are not able to change the monitor orientation from landscape to portrait. That's means you only can use the plug-and-play video ports(HDMI 3 and HDMI 4) to change the monitor orientation from landscape to portrait

⚠6: Must update your DisplayLink driver after you update the laptop system