


RUGGEDCOM RSG2288

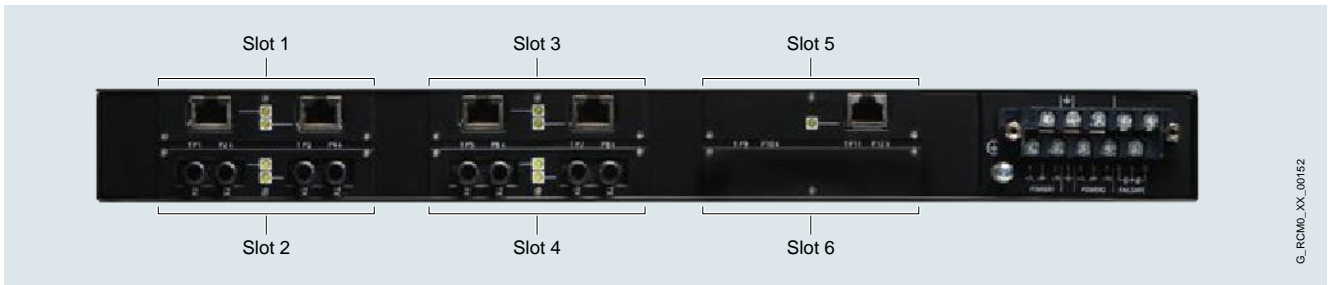

G_RCM0_XX_00162

Product	Article number							
RUGGEDCOM RSG2288	6GK6022-8AS2	.	-	.	.	.	-	Z
Power supply 1								
24 VDC (10 - 36 VDC) with screw terminal block		1						
48 VDC (36 - 72 VDC) with screw terminal block		2						
88 - 300 VDC / 85 - 264 VAC with screw terminal block		3						
24 VDC (10 - 36 VDC) with pluggable terminal block		4						
48 VDC (36 - 72 VDC) with pluggable terminal block		5						
88 - 300 VDC / 85 - 264 VAC with pluggable terminal block		6						
Power supply 2 (terminal block must be equal to power supply 1)								
No power supply 2						0		
24 VDC (10 - 36 VDC) with screw terminal block						1		
48 VDC (36 - 72 VDC) with screw terminal block						2		
88 - 300 VDC / 85 - 264 VAC with screw terminal block						3		
24 VDC (10 - 36 VDC) with pluggable terminal block						4		
48 VDC (36 - 72 VDC) with pluggable terminal block						5		
88 - 300 VDC / 85 - 264 VAC with pluggable terminal block						6		
Mounting options								
No mounting option							A	
19" rack mounting kit							D	
DIN/rail and panel mounting kit							E	
19" rack, DIN/rail and panel mounting kit							F	
Connections								
Ethernet interfaces on rear; LED panel on front; power connector on rear								B
Ethernet interfaces on front; LED panel on front; power connector on rear								C
Ethernet interfaces on rear; LED panel on top; power connector on rear								D
Ethernet interfaces on front; LED panel on top; power connector on rear								E
Manufacturing modification								
Standard								0
Conformal coating								1

Examples	Order code
RUGGEDCOM RSG2288 with 2 x HI with screw terminal block power supplies, 19" rack mounting kit, Ethernet connectors on rear; LED panel on front; power connector on rear + 9 x 10/100/1000BASE-TX RJ45 + PTP-module	6GK6022-8AS23-3DB0-Z A01+ B01+ C01+ D01+ E01+ F01

Z options	Slot 1	Slot 2	Slot 3	Slot 4
No module	A00	B00	C00	D00
2 x 10/100/1000BASE-TX RJ45	A01	B01	C01	D01
2 x 1000BASE-SX, multi-mode, 850 nm, LC, 500 m	A02	B02	C02	D02
2 x 1000BASE-LX, single-mode, 1310 nm, SC, 10 km	A03	B03	C03	D03
2 x 1000BASE-LX, single-mode, 1310 nm, LC, 10 km	A04	B04	C04	D04
2 x 1000BASE-LX, single-mode, 1310nm, SC, 25 km	A05	B05	C05	D05
2 x 1000BASE-LX, single-mode, 1310nm, LC, 25 km	A06	B06	C06	D06
2 x 1000BASE-LX SFP, blank (no optical transceiver)	A07	B07	C07	D07
2 x 1000BASE-SX SFP, multi-mode, 850 nm, LC, 500 m (Incl. 2 x SFP1122-1SX)	A08	B08	C08	D08
2 x 1000BASE-LX SFP, single-mode, 1310 nm, LC, 10 km (Incl. 2 x SFP1132-1LX10)	A09	B09	C09	D09
2 x 1000BASE-LX SFP, single-mode, 1310 nm, LC, 25 km (Incl. 2 x SFP1132-1LX25)	A10	B10	C10	D10
2 x 1000BASE-LX SFP, single-mode, 1550 nm, LC, 70 km (Incl. 2 x SFP1132-1LX70)	A11	B11	C11	D11
2 x 1000BASE-LX GBIC, blank (no optical transceiver)	A12	B12	C12	D12
2 x 1000BASE-LX GBIC, single-mode, 1310 nm, SC, 10 km	A13	B13	C13	D13
2 x 1000BASE-LX GBIC, single-mode, 1310 nm, SC, 25 km	A14	B14	C14	D14
2 x 1000BASE-LX GBIC, single-mode, 1550 nm, SC, 70 km	A15	B15	C15	D15
2 x 100BASE-FX, multi-mode, 1300 nm, ST	A16	B16	C16	D16
2 x 100BASE-FX, multi-mode, 1300 nm, SC	A17	B17	C17	D17
2 x 100BASE-FX, multi-mode 1300 nm, LC	A18	B18	C18	D18
2 x 100BASE-FX, multi-mode 1300 nm, MTRJ	A19	B19	C19	D19
2 x 100BASE-FX, single-mode 1310 nm, ST, 20 km	A20	B20	C20	D20
2 x 100BASE-FX, single-mode 1310 nm, SC, 20 km	A21	B21	C21	D21
2 x 100BASE-FX, single-mode 1310 nm, LC, 20 km	A22	B22	C22	D22
2 x 100BASE-FX, single-mode 1310 nm, SC, 50 km	A23	B23	C23	D23
2 x 100BASE-FX, single-mode 1310 nm, LC, 50 km	A24	B24	C24	D24
2 x 100BASE-FX, single-mode, 1310 nm, SC, 90 km	A25	B25	C25	D25
2 x 100BASE-FX, single-mode 1310 nm, LC, 90 km	A26	B26	C26	D26

Z options	Slot 5	Z options	Slot 5
No module	E00	1 x 1000BASE-LX GBIC, single-mode, 1310 nm, SC, 10 km	E14
1 x 10/100/1000BASE-TX RJ45	E01	1 x 1000BASE-LX GBIC, single-mode, 1310 nm, SC, 25 km	E15
1 x 1000BASE-SX, multi-mode, 850 nm, LC, 500 m	E02	1 x 1000BASE-LX GBIC, single-mode, 1550 nm, SC, 70 km	E16
1 x 1000BASE-LX, single-mode, 1310 nm, SC, 10 km	E03	1 x 100BASE-FX - multi-mode, 1300 nm, ST	E17
1 x 1000BASE-LX, single-mode, 1310 nm, LC, 10 km	E04	1 x 100BASE-FX - multi-mode, 1300 nm, SC	E18
1 x 1000BASE-LX, single-mode, 1310 nm, SC, 25 km	E05	1 x 100BASE-FX - multi-mode 1300 nm, LC	E19
1 x 1000BASE-LX, single-mode, 1310 nm, LC, 25 km	E06	1 x 100BASE-FX - multi-mode 1300 nm, MTRJ	E20
1 x 1000BASE-LX SFP, blank (no optical transceiver)	E07	1 x 100BASE-FX - single-mode 1310 nm, ST, 20 km	E21
1 x 1000BASE-SX SFP, multi-mode, 850 nm, LC, 500 m (Incl. 1 x SFP1122-1SX)	E08	1 x 100BASE-FX - single-mode 1310 nm, SC, 20 km	E22
1 x 1000BASE-LX SFP, single-mode, 1310 nm, LC, 10 km (Incl. 1 x SFP1132-1LX10)	E09	1 x 100BASE-FX - single-mode 1310 nm, LC, 20 km	E23
1 x 1000BASE-LX SFP, single-mode, 1310 nm, LC, 25 km (Incl. 1 x SFP1132-1LX25)	E10	1 x 100BASE-FX - single-mode 1310 nm, SC, 50 km	E24
1 x 1000BASE-LX SFP, single-mode, 1550 nm, LC, 70 km (Incl. 1 x SFP1132-1LX70)	E11	1 x 100BASE-FX - single-mode 1310 nm, LC, 50 km	E25
1 x 1000BASE-LX GBIC, blank (no optical transceiver)	E13	1 x 100BASE-FX - single-mode, 1310 nm, SC, 90 km	E26

Z options	Slot 6
No module	F00
Precision Time Protocol (PTP) module. Inputs: GPS, IRIG-B; outputs: IRIG-B AM and TTL	F01