



The RuggedSwitch® RSG2288 is an industrially hardened, fully managed, modular Gigabit Ethernet switch specifically designed to operate reliably in electrically harsh and climatically demanding utility substation and industrial environments. The RSG2288 features the IEEE 1588 v2 protocol with hardware time stamping allowing high precision time synchronization over the Ethernet network and conversion to IRIG-B for non-1588 devices. The RSG2288's superior ruggedized hardware design coupled with the embedded Rugged Operating System (ROS®) provides improved system reliability, and advanced cyber security and networking features making it ideal for creating mission-critical, Gigabit networks or aggregating switches into a Gigabit backbone.

The RSG2288's modular flexibility offers 100 FX or 1000BaseX fiber and 10/100/1000BaseTX copper port combinations. Support for front or rear mount connectors coupled with support for multiple fiber connector types (SFP, GBIC, LC, SC) without loss of port density makes the RSG2288 highly versatile and suitable for any application. The RSG2288 is packaged in a rugged galvanized steel enclosure with industrial grade DIN, panel, or 19" rackmount mounting options.

Features and Benefits

Ethernet Ports

- up to 9-Gigabit Ethernet ports - copper and/or fiber
- up to 9 100FX Fiber Fast Ethernet ports
- 2 port modules for tremendous flexibility
- Supports many types of fiber (Multimode, singlemode, bidirectional single strand)
- Non-blocking, store and forward switching
- Long haul optics allow Gigabit distances up to 70km
- Multiple connector types (LC, SC, SFP, GBIC)

Precision Timing

- IEEE 1588 v2 with hardware time stamping on all ports
- IEEE 1588 v2 to IRIG-B conversion
- Transparent clock operation for high precision on switched networks (better than 1µs accuracy, typically 100ns)
- High precision TCXO (Temperature Compensated Oscillator)
- Supports master, slave and transparent clock

RuggedRated™ for Reliability in Harsh Environments

- Immunity to EMI and heavy electrical surges
 - Zero-Packet-Loss™ Technology
 - Meets IEEE 1613 Class 2 (electric utility substations)
 - Exceeds IEC 61850-3 (electric utility substations)
 - Exceeds IEC 61800-3 (variable speed drive systems)
 - Exceeds IEC 61000-6-2 (generic industrial)
 - Exceeds NEMA TS-2 (traffic control equipment)
- -40° to +85°C operating temperature (no fans)
- Conformal coated printed circuit boards (optional)
- 18 AWG galvanized steel enclosure
- Hazardous Location Certification: Class 1 Division 2

Rugged Operating System (ROS®) Features

- Simple plug and play operation - automatic learning, negotiation, and crossover detection
- RSTP (802.1w) and Enhanced Rapid Spanning Tree (eRSTP™) network fault recovery (<5ms)
- Quality of Service (802.1p) for real-time traffic
- VLAN (802.1q) with double tagging and GVRP support
- Link aggregation (802.3ad)
- IGMP Snooping for multicast filtering
- Port Rate Limiting and Broadcast Storm Limiting
- Port configuration, status, statistics, mirroring, security
- Loss of link management on fiber ports
- SNTP time synchronization (client and server)
- Industrial automation features (eg. Modbus)


Management Tools

- Web-based, Telnet, CLI management interfaces
- SNMP v1/v2/v3 (56-bit encryption)
- Remote Monitoring (RMON)
- Rich set of diagnostics with logging and alarms

Universal Power Supply Options

- Fully integrated, dual-redundant (optional) power supplies
- Universal high voltage range: 88-300VDC or 85-264VAC
- Popular low voltage ranges: 24VDC(10-36VDC), 48VDC (36-72VDC)
- Screw or pluggable terminal blocks available
- Terminal blocks for reliable maintenance free connections
- CSA/UL 60950 safety approved to +85°C

RuggedSwitch® RSG2288

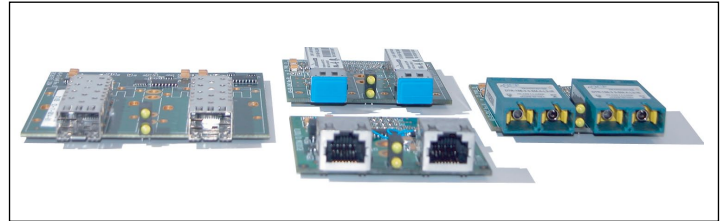

Ethernet Modules



Mounting Options

- ▶ Panel/Din Rail
- ▶ 19" Rack Mount
- ▶ Front or Rear Mount

Gigabit Port Types:

- ▶ 10/100/1000 TX RJ45
- ▶ 1000 BaseX Fiber
- ▶ 100FX Fiber
- ▶ Pluggable Optics (SFP)
- ▶ SC, ST, LC and MTRJ

Modularity:

- ▶ 6 available slots
- ▶ Dual and single port modules
- ▶ Up to 9 Gigabit ports
- ▶ PTP Card

Modular HMI:

- ▶ Front or Rear Mount

Integrated Power Supply

- ▶ Universal high-voltage range: 88-300VDC or 85-264VAC
- ▶ Popular low voltage DC ranges: 24VDC (10-36VDC), 48VDC (36-59VDC)
- ▶ True Dual Redundant Parallel Load Sharing (Optional)
- ▶ Screw or pluggable terminal blocks available

Operating Temperature

- ▶ -40°C to +85°C
- ▶ No Fans

Critical Alarm Relay

- ▶ Form-C contact ratings:
Max Voltage 250VAC, 125VDC
Max Current 2A@250VAC,
2A@30VDC



RuggedSwitch® RSG2288 Optional Clock Source Card

IEEE 1588 v2 Support

- ▶ Hardware time stamping on all ports
- ▶ Transparent clock operation for high precision on switched networks (better than 1µs accuracy)
- ▶ Peer-to-peer path delay measurements
- ▶ High precision TCXO (Temperature Compensated Oscillator)
- ▶ Supports slave, master and transparent clock



IRIG-B Outputs

- ▶ Conversion from IEEE 1588 v2
- ▶ IRIG-B unmodulated (TTL) or PPS
- ▶ IRIG-B modulated (AM)
- ▶ Supports TTL levels PWM output (Format B002, B003), 50 ohm BNC female connector
- ▶ Supports 1kHz AM output (Format B122, B123), 5Vp-p, ratio 3:1 ± 10%, 50 ohm BNC female connector

IRIG-B Input

- ▶ IRIG-B (TTL)
- ▶ Supports TTL levels PWM output (Format B002, B003), 50 ohm BNC female connector
- ▶ >200K ohm input impedance

GPS Input

- ▶ NMEA 0183 protocol compatible
- ▶ Frequency stability: 0.5ppm
- ▶ PPS accuracy: +/- 1µs
- ▶ 50 ohm BNC female connector RF input with remote antenna suitable for low-loss coaxial cable
- ▶ Support active antenna with +5V DC power feed

Accuracy

- ▶ better than 1µs, typically 100ns - (IEEE 1588)
- ▶ better than 1µs - (IRIG-B)

ROS® Features



Cyber Security

Cyber security is an urgent issue in many industries where advanced automation and communications networks play a crucial role in mission critical applications and where high reliability is of paramount importance. Key ROS® features that address security issues at the local area network level include:

- **Passwords** - Multi-level user passwords secures switch against unauthorized configuration
- **SSH / SSL** - Extends capability of password protection to add 128-bit encryption of passwords and data as they cross the network
- **Enable/Disable Ports** - Capability to disable ports so that traffic can not pass
- **802.1q VLAN** - Provides the ability to logically segregate traffic between predefined ports on switches
- **MAC Based Port Security** - The ability to secure ports on a switch so only specific Devices / MAC addresses can communicate via that port
- **802.1x Port Based Network Access Control** - The ability to lock down ports on a switch so that only authorized clients can communicate via this port
- **RADIUS** - authentication service using MD5 hash and providing centralized password management
- **SNMPv3** - encrypted authentication access security and data encryption (CBC-DES with 56-bit encryption key)
- **Secure Socket Layer** - Web-based management using SSL with data encryption (128-bit encryption key)
- **RSA** - 1024 bit key for key management and key exchange
- **TACACS+** - Terminal Access Control and Accounting Services Client provides encrypted authentication and authorization
- **Point to Point (PPP)** - using CHAP (MD5 Hash) authentication service
- **SFTP** - Secure File Transfer Protocol using SSH encryption

The ROS® cyber security features are included to help address the various industry specific security standards such as NERC CIP, ISA S99, AGA 12, IEC 62443, ISO 17799:2005 and PCSRF SPP-ICS.

IEEE 1588 v2

ROS® fully supports the IEEE 1588 protocol which allows for high precision time synchronization of devices on the Ethernet network. When used with a RuggedSwitch® incorporating hardware based time stamping, accuracies better than 1µs can be reliably achieved with many switches and any traffic load on the network.

Quality of Service (IEEE 802.1p)

Some networking applications such as real-time control or VoIP (voice over IP) require predictable arrival times for Ethernet frames. Switches can introduce latency in times of heavy network traffic due to the internal queues that buffer frames and then transmit on a first come first serve basis. ROS® supports 'Class of

Service' in accordance with IEEE 802.1p that allows time critical traffic to jump ahead to the front of the queue thus minimizing latency and reducing jitter to allow such demanding applications to operate correctly. ROS® allows priority classification by port, tags, MAC address, and IP type of service (TOS).

A configurable "weighted fair queuing" algorithm controls how frames are emptied from the queues.

VLAN (IEEE 802.1q)

Virtual local area networks (VLAN) allow the segregation of a physical network into separate logical networks with independent broadcast domains. A measure of security is provided since hosts can only access other hosts on the same VLAN and traffic storms are isolated. ROS® supports 802.1q tagged Ethernet frames and VLAN trunks. Port based classification allows legacy devices to be assigned to the correct VLAN. GVRP support is also provided to simplify the configuration of the switches on the VLAN.

Link Aggregation (802.3ad)

The link aggregation feature provides the ability to aggregate several Ethernet ports into one logical link (port trunk) with higher bandwidth. This provides an inexpensive way to set up a high speed backbone to improve network bandwidth. This feature is also known as "port trunking", "port bundling", "port teaming", and "ethernet trunk".

IGMP Snooping

ROS® uses IGMP snooping (Internet Group Management Protocol v1&v2) to intelligently forward or filter multicast traffic streams (e.g. MPEG video) to or from hosts on the network. This reduces the load on network trunks and prevents packets from being received on hosts that are not involved. ROS® has a very powerful implementation of IGMP snooping that:

- Can be enabled on a per VLAN basis.
- Detects and filters all multicast streams regardless of whether subscribers exist.
- Supports "router-less" operation by supporting an "active" mode.
- Restores traffic streams immediately after an RSTP topology change.

SNMP (Simple Network Management Protocol)

SNMP provides a standardized method for network management stations the ability to interrogate devices from different vendors. SNMP versions supported by ROS® are v1, v2c, and v3. SNMPv3 in particular provides security features such as authentication, privacy with data encryption (CBC-DES with 56-bit encryption key) and access control not present in earlier SNMP versions. ROS® also supports numerous standard MIBs (Management Information Base) allowing for easy integration with any network management system (NMS). A feature of

ROS® Features



SNMP supported by ROS® is the ability to generate “traps” upon system events. A NMS can record traps from multiple devices providing a powerful network troubleshooting tool. RuggedVue™ is RuggedCom’s NMS that provides graphical visualization of the network and is fully integrated with all RuggedCom products.

1 eRSTP fault recovery times may be approximated as follows:

For 100 Mbps, fault recovery performance is <5ms/hop

For 1,000 Mbps, fault recovery performance is <5ms/hop + 20ms

SCADA and Industrial Automation

ROS® contains features that optimize network performance and simplify switch management based on the unique requirements found in SCADA and industrial automation applications. Features such as Modbus TCP management for retrieval of switch data using the ubiquitous Modbus protocol and DHCP Option 82, a Rockwell Automation ODVA requirement for IP address assignment based on the location of the end device, provide capabilities not found in typical “commercial” or “office grade” Ethernet switches.

Port Based Network Access Control (802.1x)

ROS® supports the IEEE 802.1x standard that defines a mechanism for port-based network access control which provides a means of authenticating and authorizing devices attached to LAN ports.

Port Rate Limiting

ROS® supports configurable rate limiting per port to limit unicast and multicast traffic. This can be essential to managing precious network bandwidth for service providers. It also provides edge security for denial of service (DOS) attacks.

Broadcast Storm Filtering

Broadcast storms wreak havoc on a network and can cause attached devices to malfunction. This could be disastrous on a network with mission critical equipment. ROS® limits this by filtering broadcast frames with a user-defined threshold.

Loss of Link Management

Some intelligent electronic devices (IEDs) have dual fiber optic ports with automatic failover to a backup port should the primary fail. ROS® ensures this mechanism works reliably under all failure modes by appropriately disabling link signals when required. ROS® also flushes learned MAC addresses to ensure the failover occurs quickly.

Port Mirroring

ROS® can be configured to duplicate all traffic on one port to a designated mirror port. When combined with a network analyzer, this can be a powerful troubleshooting tool.

Port Configuration and Status

ROS® allows individual ports to be ‘hard’ configured for speed, duplex, auto-negotiation, flow control and more. This allows proper connection with devices that do not negotiate or have unusual settings. Detailed status of ports with alarm and SNMP trap on link problems aid greatly in system troubleshooting.

Port Statistics and RMON (Remote Monitoring)

ROS® provides continuously updating statistics per port that provide both ingress and egress packet and byte counters as well as detailed error figures. Also provided is full support for the RMON statistics, history, alarms, and event groups. RMON allows for very sophisticated data collection, analysis and detection of traffic patterns.

Event Logging and Alarms

ROS® records all significant events to a non-volatile system log allowing forensic troubleshooting. Events include link failure and recovery, unauthorized access, broadcast storm detection, and self-test diagnostics among others. Alarms provide a snapshot of recent events that have yet to be acknowledged by the network administrator. An external hardware relay is de-energized during the presence of critical alarms allowing an external controller to react if desired.

HTML Web Browser and Telnet User Interfaces

ROS® provides a simple, intuitive user interface for configuration and monitoring via a standard graphical web browser or via Telnet. All system parameters include detailed on-line help to make setup a breeze. ROS®, presents a common look and feel and standardized configuration process allowing easy migration to other RuggedCom managed products.

Configuration via ASCII Text File

All configuration parameters are stored in an ASCII formatted text file that can easily be transferred via TFTP or Xmodem. The configuration file can be saved for backup purposes and easily manipulated by a text editor. The same text file can be downloaded to the switch at a later date in order to re-configure or restore a previous configuration.

Command Line Interface (CLI)

A command line interface can be used in conjunction with remote shell to automate data retrieval, configuration updates, and firmware upgrades. A powerful SQL-like capability allows expert users the ability to selectively retrieve or manipulate any parameters the device has to offer.

EMI and Environmental Type Tests

IEC 61850-3 EMI TYPE TESTS				
TEST	Description		Test Levels	Severity Levels
IEC 61000-4-2	ESD	Enclosure Contact	+/- 8kV	4
		Enclosure Air	+/- 15kV	4
IEC 61000-4-3	Radiated RFI	Enclosure ports	20 V/m	x
IEC 61000-4-4	Burst (Fast Transient)	Signal ports	+/- 4kV @ 2.5kHz	x
		D.C. Power ports	+/- 4kV	4
		A.C. Power ports	+/- 4kV	4
		Earth ground ports ¹	+/- 4kV	4
IEC 61000-4-5	Surge	Signal ports	+/- 4kV line-to-earth, +/- 2kV line-to-line	4
		D.C. Power ports	+/- 2kV line-to-earth, +/- 1kV line-to-line	3
		A.C. Power ports	+/- 4kV line-to-earth, +/- 2kV line-to-line	4
IEC 61000-4-6	Induced (Conducted) RFI	Signal ports	10V	3
		D.C. Power ports	10V	3
		A.C. Power ports	10V	3
		Earth ground ports ¹	10V	3
IEC 61000-4-8	Magnetic Field	Enclosure ports	40 A/m continuous, 1000 A/m for 1 s	N/A
IEC 61000-4-29	Voltage Dips & Interrupts	D.C. Power ports	30% for 0.1s, 60% for 0.1s, 100% for 0.05s	N/A
IEC 61000-4-11		A.C. Power ports	30% for 1 period, 60% for 50 periods 100% for 5 periods, 100% for 50 periods ²	N/A
IEC 61000-4-12	Damped Oscillatory	Signal ports	2.5kV common, 1kV diff. mode@1MHz	3
		D.C. Power ports	2.5kV common, 1kV diff. mode@1MHz	3
		A.C. Power ports	2.5kV common, 1kV diff. mode@1MHz	3
IEC 61000-4-16	Mains Frequency Voltage	Signal ports	30V Continuous, 300V for 1s	4
		D.C. Power ports	30V Continuous, 300V for 1s	4
IEC 61000-4-17	Ripple on D.C. Power Supply	D.C. Power ports	10%	3
IEC 60255-5	Dielectric Strength	Signal ports	2kVac (Fail-Safe Relay output)	N/A
		D.C. Power ports	1.5kV DC	N/A
		A.C. Power ports	2kVac	N/A
IEC 60255-5	H.V. Impulse	Signal ports	5kV (Fail-Safe Relay output)	N/A
		D.C. Power ports	5kV	N/A
		A.C. Power ports	5kV	N/A

IEEE 1613 (C37.90.x) EMI IMMUNITY TYPE TESTS				
Test	Description		Test Levels	Severity Levels
IEEE C37.90.3	ESD	Enclosure Contact	+/- 8kV	N/A
		Enclosure Air	+/- 15kV	N/A
IEEE C37.90.2	Radiated RFI	Enclosure ports	35 V/m	N/A
IEEE C37.90.1	Fast Transient	Signal ports	+/- 4kV @ 2.5kHz	N/A
		D.C. Power ports	+/- 4kV	N/A
		A.C. Power ports	+/- 4kV	N/A
		Earth ground ports ¹	+/- 4kV	N/A
IEEE C37.90.1	Oscillatory	Signal ports	2.5kV common mode @1MHz	N/A
		D.C. Power ports	2.5kV common, 1kV diff. mode@1MHz	N/A
		A.C. Power ports	2.5kV common, 1kV diff. mode@1MHz	N/A
IEEE C37.90	H.V. Impulse	Signal ports	5kV (Fail-Safe Relay output)	N/A
		D.C. Power ports	5kV	N/A
		A.C. Power ports	5kV	N/A
IEEE C37.90	Dielectric Strength	Signal ports	2kVac	N/A
		D.C. Power ports	1.5kV DC	N/A
		A.C. Power ports	2kVac	N/A

Environmental Type Tests				
Test	Description		Test Levels	Severity Levels
IEC 60068-2-1	Cold Temperature	Test Ad	-40°C, 16 Hours	N/A
IEC 60068-2-2	Dry Heat	Test Bd	+85°C, 16 Hours	N/A
IEC 60068-2-30	Humidity (Damp Heat, Cyclic)	Test Db	95% (non-condensing), 55°C , 6 cycles	N/A
IEC 60255-21-1	Vibration		2g @ (10 - 150) Hz	
IEC 60255-21-2	Shock		30g @ 11mS	

Notes:

1. Only applicable to functional earth connections separated from the safety earth connection.
2. Class 2 refers to "Measuring relays and protection equipment for which a very high security margin is required or where the vibration levels are very high. (e.g. shipboard application and for severe transportation conditions)"

Technical Specifications

Power Supply

- Power Consumption: 28W Max
- 24VDC: 10-36 VDC, 1.2A
- 48VDC: 36-72 VDC, 0.6A
- HI Voltage AC/DC: 88-300VDC or 85-264VAC

Critical Alarm Relay

- Form-C contact ratings:
- Max Voltage 250VAC, 125VDC
- Max Current 2A@250VAC, 2A@30VDC

Physical

- Height: 4.42cm / 1.74"
- Width: 46.48cm / 18.3"
- Depth: 31.5cm / 12.4"
- Weight: 4.8kg / 10.6 lbs
- Ingress Protection: IP40 (1mm objects)
- Enclosure: 18 AWG galvanized steel enclosure
- Mounting: DIN rail or panel mounted

Switch Properties

- Switching method: Store & Forward
- Switching latency: 7 μ s
- Switching bandwidth: 18Gbps
- MAC addresses: 8192
- MAC address table size: 64kbytes
- Priority Queues: 4
- Frame buffer memory: 2 Mbit
- VLANs: 4094
- IGMP multicast groups: 256
- Port rate limiting
- No head of line blocking

Approvals

- ISO: Designed and manufactured using a ISO9001: 2000 certified quality program
- CE Marking
- Emissions: FCC Part 15 (Class A), EN55022 (CISPR22 Class A)
- Safety: cCSAus (Compliant with CSA C22.2 No. 60950, UL 60950, EN60950)
- Laser Eye Safety (FDA/CDRH): Complies with 21 CFR Chapter1, Subchapter J.

Warranty

- 5 Years - Applicable to design and manufacturing related product defects.

Network Management

- HTTP graphical web-based, SSL (128-bit encryption)
- SNMP v1, v2c, v3 (56-bit encryption)
- Telnet, VT100, SSH/SFTP (128-bit encryption)
- Command Line Interface (CLI)
- RSA Key Management (1024 bit key)
- Authentication and Accounting - TACACS+ (encrypted), RADIUS client, PPP

EMI Immunity and Environmental Compliance

- IEC 61000-6-2 Industrial (Generic)
- IEC 61800-3 Industrial (Variable Speed Drive Systems)
- IEC 61850-3 Electric Utility Substations
- IEEE 1613 Electric Utility Substations
- NEMA TS 2 Traffic Control Equipment

IEEE Compliance

- 802.3-10BaseT
- 802.3u-100BaseTX, 100BaseFX
- 802.3x-Flow Control
- 802.3z-1000BaseLX
- 802.3ab-1000BaseTX
- 802.3ad-Link Aggregation
- 802.1d-MAC Bridges
- 802.1d-Spanning Tree Protocol
- 802.1p-Class of Service
- 802.1q-VLAN Tagging
- 802.1w-Rapid Spanning Tree Protocol
- 802.1x-Port Based Network Access Control
- 1588 v2 Precision Time Protocol


IETF RFC Compliance

- RFC768-UDP
- RFC783-TFTP
- RFC791-IP
- RFC792-ICMP
- RFC793-TCP
- RFC826-ARP
- RFC854-Telnet
- RFC894-IP over Ethernet
- RFC1112-IGMP v1
- RFC1519-CIDR
- RFC1541-DHCP (client)
- RFC2030-SNTP
- RFC2068-HTTP
- RFC2236-IGMP v2
- RFC2284-EAP
- RFC2475-Differentiated Services
- RFC2865-RADIUS
- RFC3414-SNMPv3-USM
- RFC3415-SNMPv3-VACM


IETF SNMP MIBS

- RFC1493-BRIDGE-MIB
- RFC1907-SNMPv2-MIB
- RFC2012-TCP-MIB
- RFC2013-UDP-MIB
- RFC2578-SNMPv2-SMI
- RFC2579-SNMPv2-TC
- RFC2819-RMON-MIB
- RFC2863-IF-MIB
- draft-ietf-bridge-rstpmib-03-BRIDGE-MIB
- draft-ietf-bridge-bridgemib-smiv2-03-RSTP-MIB
- IANAifType-MIB

Dimensions

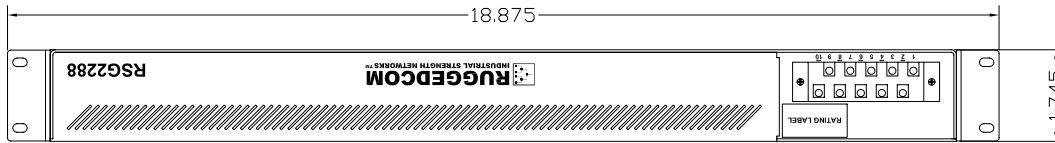


REAR VIEW

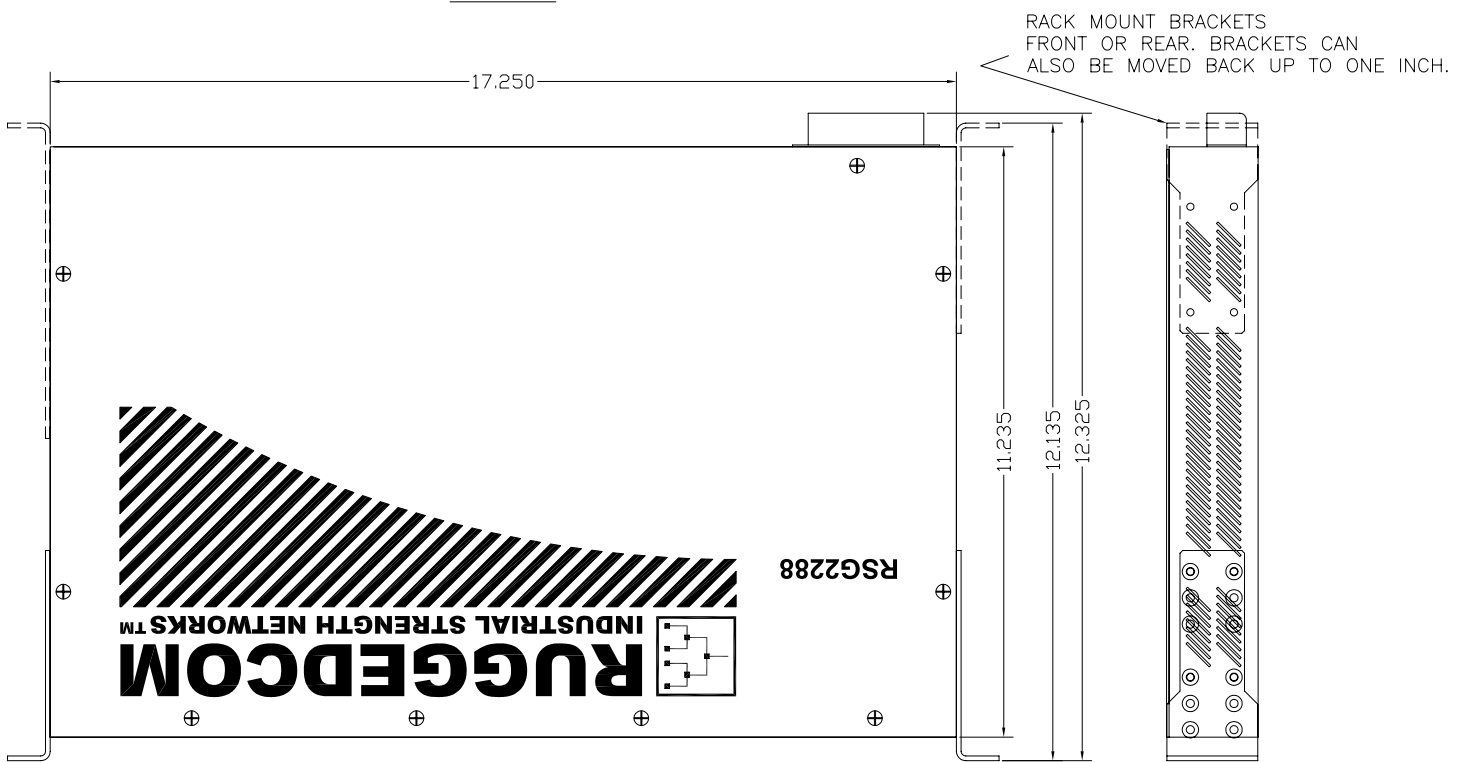

TOP VIEW

SIDE VIEW

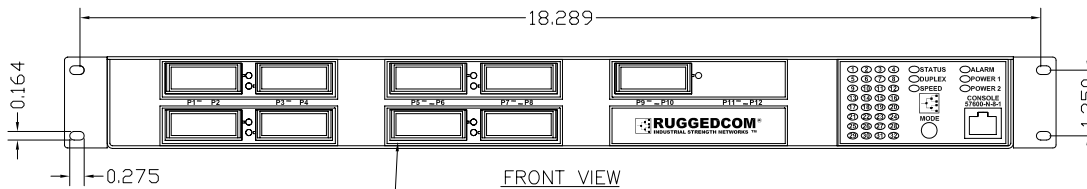


FRONT VIEW


GIGABIT CONNECTORS
2 PORTS X 1 OF ANY CONNECTOR TYPE

Mounting Options

19" Rack Front Mount - (Connectors At Front) 12-11-0040-F




FRONT VIEW




REAR VIEW

19" Rack Rear Mount - (Connectors At Rear) 12-11-0040-R




FRONT VIEW



REAR VIEW



Panel / DIN Rail Bottom Mount - (Connectors At Bottom) 12-11-0040-B

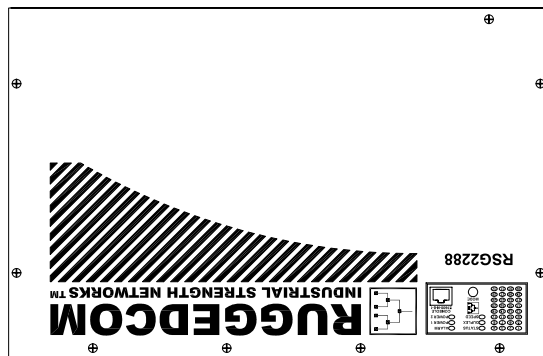

FRONT VIEW




BOTTOM VIEW

Panel / DIN Rail Top Mount - (Connectors At Top) 12-11-0040-T



TOP VIEW

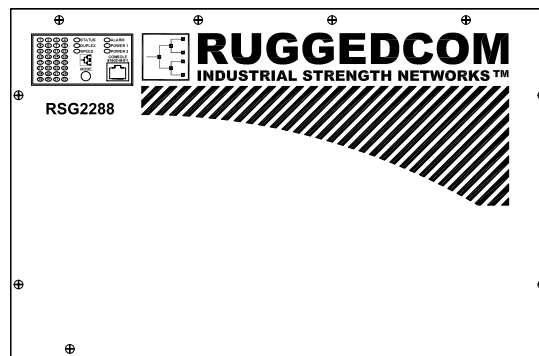

FRONT VIEW

Order Codes

RSG2288 - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____
 Main Mount PS1 PS2 S1 S2 S3 S4 S5 S6 MOD

Slot 1	Slot 3	Slot 5	RSG2200
Slot 2	Slot 4	Slot 6	

Main: Ethernet and Power Connectors

- R = Ethernet on rear; LED panel on front; power connector on rear
- F = Ethernet on front; LED panel on front; power connector on rear
- B = Ethernet on rear; LED panel on top; power connector on rear
- T = Ethernet on front; LED panel on top; power connector on rear

Mount: Mounting Options

- RM = 19" Rack Mount Kit
- DP = DIN and Panel Mount Kit
- RD = 19" Rack, DIN, and Panel Mount Kit
- 00 = No Mounting Option

PS1 and PS2: Power Supply 1 and 2⁽⁵⁾

- 24 = 24VDC (10-36VDC), screw terminal block
- 48 = 48VDC (36-72VDC), screw terminal block
- HI = 88-300VDC or 85-264VAC, screw terminal block
- 24P = 24VDC (10-36VDC), pluggable terminal block
- 48P = 48VDC (36-72VDC), pluggable terminal block
- HIP = 88-300VDC or 85-264VAC, pluggable terminal block
- XX = No Power Supply (PS2 Only)

S1, S2, S3, S4: Gigabit Ethernet Modules for Slots 1, 2, 3, and 4

- XXXX = Empty
- CG01 = 2 x 10/100/1000Tx RJ45
- FG01 = 2 x 1000SX - Multimode, 850nm, LC, 500m
- FG02 = 2 x 1000LX - Singlemode, 1310nm, SC connectors, 10km
- FG03 = 2 x 1000LX - Singlemode, 1310nm, LC connectors, 10km
- FG04 = 2 x 1000LX - Singlemode, 1310nm, SC connectors, 25km
- FG05 = 2 x 1000LX - Singlemode, 1310nm, LC connectors, 25km
- FG50 = 2 x 1000LX SFP - Blank (no optical transceiver)
- FG51 = 2 x 1000SX SFP - Multimode, 850nm, LC, 500m
- FG52 = 2 x 1000LX SFP - Singlemode, 1310nm, LC, 10km
- FG53 = 2 x 1000LX SFP - Singlemode, 1310nm, LC, 25km
- FG54 = 2 x 1000LX SFP - Singlemode, 1550nm, LC, 70km⁽²⁾
- FG70 = 2 x 1000LX GBIC - Blank (no optical transceiver)
- FG71 = 2 x 1000LX GBIC - Singlemode, 1310nm, SC, 10km
- FG72 = 2 x 1000LX GBIC - Singlemode, 1310nm, SC, 25km
- FG73 = 2 x 1000LX GBIC - Singlemode, 1550nm, SC, 70km⁽²⁾
- FXA01 = 2 x 100FX - Multimode, 1300nm, ST
- FXA02 = 2 x 100FX - Multimode, 1300nm, SC
- FXA11 = 2 x 100FX - Multimode, 1300nm, LC
- FXA03 = 2 x 100FX - Multimode, 1300nm, MTRJ
- FXA04 = 2 x 100FX - Singlemode, 1310nm, ST, 20km
- FXA05 = 2 x 100FX - Singlemode, 1310nm, SC, 20km
- FXA06 = 2 x 100FX - Singlemode, 1310nm, LC, 20km
- FXA07 = 2 x 100FX - Singlemode, 1310nm, SC, 50km
- FXA08 = 2 x 100FX - Singlemode, 1310nm, LC, 50km

- FXA09 = 2 x 100FX - Singlemode, 1310nm, SC, 90km
- FXA10 = 2 x 100FX - Singlemode, 1310nm, LC, 90km

S5: Gigabit Ethernet Modules for Slot 5

- XXXXX = Empty
- 1CG01 = 1 x 10/100/1000Tx RJ45
- 1FG01 = 1 x 1000SX - Multimode, 850nm, LC, 500m
- 1FG02 = 1 x 1000LX - Singlemode, 1310nm, SC connectors, 10km
- 1FG03 = 1 x 1000LX - Singlemode, 1310nm, LC connectors, 10km
- 1FG04 = 1 x 1000LX - Singlemode, 1310nm, SC connectors, 25km
- 1FG05 = 1 x 1000LX - Singlemode, 1310nm, LC connectors, 25km
- 1FG50 = 1 x 1000LX SFP - Blank (no optical transceiver)
- 1FG51 = 1 x 1000SX SFP - Multimode, 850nm, LC, 500m⁽³⁾
- 1FG52 = 1 x 1000LX SFP - Singlemode, 1310nm, LC, 10km⁽³⁾
- 1FG53 = 1 x 1000LX SFP - Singlemode, 1310nm, LC, 25km⁽³⁾
- 1FG54 = 1 x 1000LX SFP - Singlemode, 1550nm, LC, 70km⁽³⁾
- 1FG70 = 1 x 1000LX GBIC - Blank (no optical transceiver)
- 1FG71 = 1 x 1000LX GBIC - Singlemode, 1310nm, SC, 10km⁽⁴⁾
- 1FG72 = 1 x 1000LX GBIC - Singlemode, 1310nm, SC, 25km⁽⁴⁾
- 1FG73 = 1 x 1000LX GBIC - Singlemode, 1550nm, SC, 70km⁽⁴⁾
- 1FXA01 = 1 x 100FX - Multimode, 1300nm, ST
- 1FXA02 = 1 x 100FX - Multimode, 1300nm, SC
- 1FXA11 = 1 x 100FX - Multimode, 1300nm, LC
- 1FXA03 = 1 x 100FX - Multimode, 1300nm, MTRJ
- 1FXA04 = 1 x 100FX - Singlemode, 1310nm, ST, 20km
- 1FXA05 = 1 x 100FX - Singlemode, 1310nm, SC, 20km
- 1FXA06 = 1 x 100FX - Singlemode, 1310nm, LC, 20km
- 1FXA07 = 1 x 100FX - Singlemode, 1310nm, SC, 50km
- 1FXA08 = 1 x 100FX - Singlemode, 1310nm, LC, 50km
- 1FXA09 = 1 x 100FX - Singlemode, 1310nm, SC, 90km
- 1FXA10 = 1 x 100FX - Singlemode, 1310nm, LC, 90km

S6: RSG2288 Modules for Slot 6

- XXX = Empty
- PTP1 = Precision Time Protocol (PTP) Source Card: Inputs - GPS, IRIG-B, Outputs - IRIG-B AM and TTL

MOD: Manufacturing Modifications

- XX = None
- C01 = Conformal Coating

Example Order Codes:

RSG2288-R-RM-24-XX-FG02-FG02-XXXX-XXXX-XXXX-XXXX-XX

19" Rack mounted, Single 24VDC power supply, 4 1000LX Gigabit Ethernet Ports (Singlemode 1310nm fiber, SC connectors), with Ethernet ports on the rear.

RSG2288-F-RM-48-48-CG01-CG01-FG01-FG01-XXXX-XXXX-C01

19" Rack mounted, Dual 48VDC power supplies, 4 10/100/1000 RJ45 Ethernet Ports, 4 1000SX Gigabit Ethernet Ports (Multimode 1300nm fiber, LC connectors) Ethernet ports, with Ethernet ports on the front, conformal coating.

RSG2288-R-RM-HI-48-FG51-FG51-FG51-FG51-1FG51-PTP1-C01

19" Rack mounted, Dual power supplies (HI and 48VDC), 9 1000LX Gigabit Ethernet Ports (SFP "pluggable" optics with Multimode, 850nm, LC connectors), with Ethernet ports on the rear and GPS/IRIG-B Precision Time Protocol Card, conformal coating.

Accessories/Options

41-11-0011 - Cable support brackets

43-10-0007 - Power cable
(North America three prong connector -> beau)

99-01-0015 - GPS Antenna

Notes:

- 1 Distance ratings are typical but will depend on type of cabling, number of connectors and splices.
- 2 These transceivers have an operating temperature range of -20 °C to +85°C. All other transceivers have an operating temperature range of -40°C to +85°C.
- 3 SFP pluggable optics that consist of a blank cage (FG50 for dual, 1FG50 for single) plus specified fiber optic interface(s) installed.
- 4 GBIC pluggable optics that consist of a blank cage (FG70 for dual, 1FG70 for single) plus specified fiber optic interface(s) installed
- 5 Power Supply 1 and 2 must be either both screw terminal block or both pluggable terminal block

RuggedCom Inc.

300 Applewood Crescent, Unit 1,
Concord, Ontario, Canada L4K 5C7

Tel: +1 (905) 856-5288 **Fax:** +1 (905) 856-1995

Toll Free: 1 (888) 264-0006

Technical Support Center

Toll Free (USA & Canada): 1 (866) 922-7975

International: +1 (905) 856-5288

USA: +1 (954) 922-7975

E-mail: Support@RuggedCom.com

© 2010 RuggedCom Inc.

RuggedSwitch is a registered trademark of RuggedCom Inc.

Ethernet is a trademark of the Xerox Corporation.

Patent Pending

All specifications in this document are subject to change without notice.

Rev 1d — 04/27/10

For additional information on our products and services, please
visit our web site at: www.RuggedCom.com