

A step-by-step guide to setup DH-5201 Wi-Fi extender's Access Point mode



Step 1. Take the unit out of the box and refer to the label pasted on the back of the unit. You will see the default SSID (aka wireless network name) of the unit. For example, Prolink_XXXX where XXXX is the last 4 characters of your unit SSID. Please take note of this SSID.



Step 2. Connect the Wi-Fi extender to wall socket near your wireless router. Get ready your original wireless router 5GHz wireless network name and password.

Step 3. Turn on the Wi-Fi extender and wait for about 30 seconds. On your PC/laptop/phone, connect to the extender by searching for the SSID (i.e., Prolink_XXXX).

Note: No password and internet is required. Please ignore the message from your anti-virus software showing the network does not require any password.

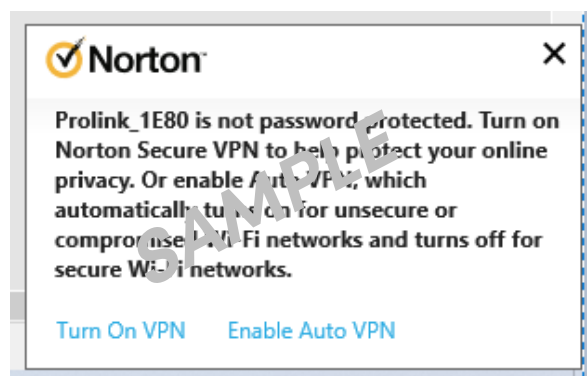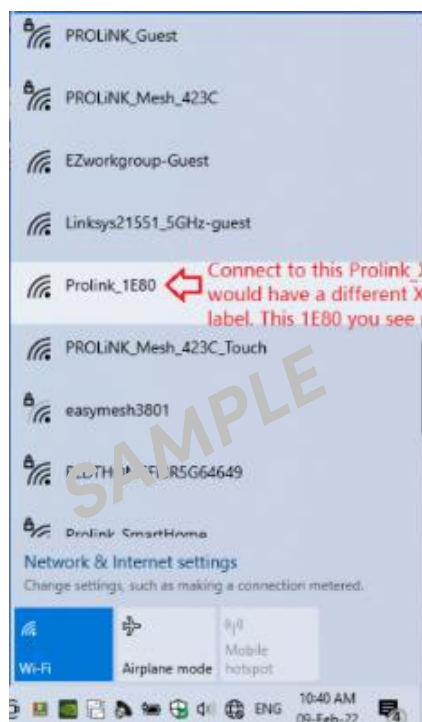


Step 4. Your default web browser will automatically open and you will see the default screen below asking to enter a login password for the Wi-Fi extender (Do note that this is the Wi-Fi extender's web GUI login password and not the wireless password).

Note: You will need to remember this password as you will need it in the future if you wish to change the settings of the Wi-Fi extender. If you forgot the password, you will need to reset the Wi-Fi extender and set up the unit again starting from step 1 in this guide.

Step 5. Enter the login password you wish to use twice then click [next].


Note: You can click on the eye icon to view the password you have typed to ensure that they are correct and identical. Then click [next].

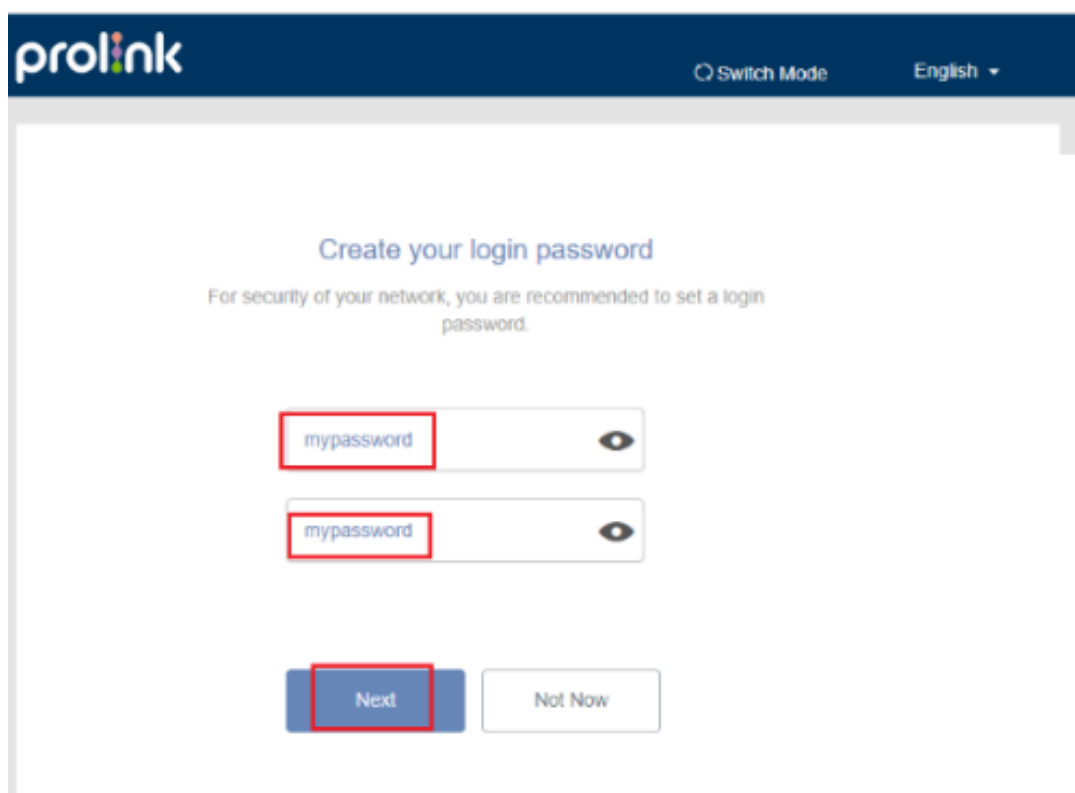


The screenshot shows the ProLink web interface for creating a login password. At the top, there is a dark blue header with the 'prolink' logo on the left, a 'Switch Mode' button in the center, and a language dropdown menu set to 'English' on the right. The main content area has a white background with the heading 'Create your login password' in blue. Below the heading is a message: 'For security of your network, you are recommended to set a login password.' There are two password input fields, each containing the text 'mypassword' and a red rectangular highlight around the text. To the right of each field is an eye icon. At the bottom, there are two buttons: a blue 'Next' button with a red rectangular highlight, and a white 'Not Now' button.



Step 6. Click on [Switch Mode] located at the top right-hand of the screen.

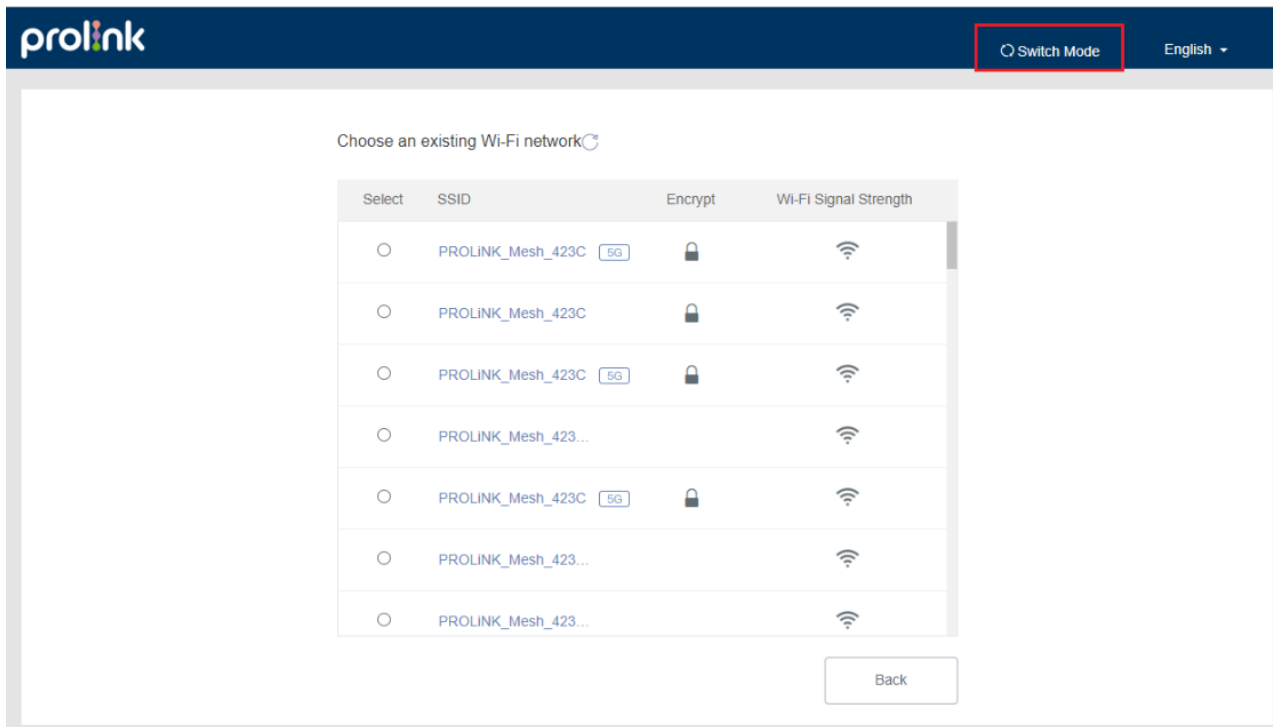

Step 7. Click on [AP mode] and [Switch Mode].

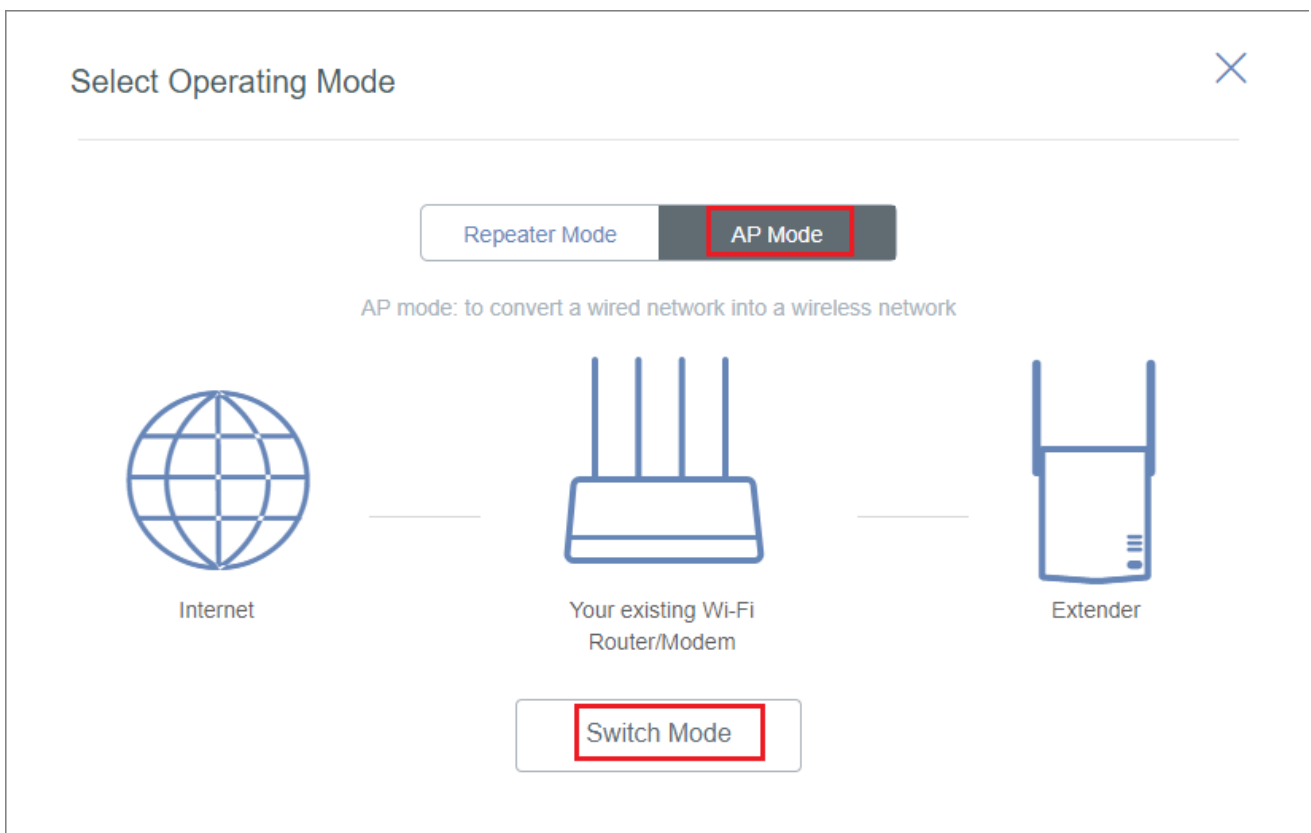

Step 8. Enter the SSID and password you wish to use. Then click [Done].

Note: Click on the eye icon to see the password you have typed to ensure it is correct.

The screenshot shows the ProLink web interface. At the top, there is a dark blue header with the 'prolink' logo on the left, 'Switch Mode' in the center, and 'English' with a dropdown arrow on the right. The main content area has a light gray background. In the center, the text 'Set an SSID and password for the AP' is displayed. Below this, there are two input fields. The first is labeled 'SSID:' and contains the text 'mySSID'. The second is labeled 'Wi-Fi Password:' and contains the text 'mypassword'. To the right of the password field is an eye icon. Below the input fields is a blue button labeled 'Done'. Red boxes highlight the 'mySSID' text, the 'mypassword' text, the eye icon, and the 'Done' button.

Step 9. You will see the progress and take note of your 2.4GHz and 5GHz SSID name.

The screenshot shows the ProLink web interface during the network creation process. At the top, there is a dark blue header with the 'prolink' logo on the left. The main content area has a light gray background. In the center, the text 'Creating Wi-Fi network... Please wait8%' is displayed. Below this, there is a progress bar. Underneath the progress bar, there is a table with two rows. The first row shows 'mySSID' with a lock icon and a Wi-Fi icon. The second row shows 'mySSID_5GEXT' with a lock icon and a Wi-Fi icon. To the right of the table, there are two red arrows pointing to the SSID names. The first arrow points to 'mySSID' and is labeled 'This is your 2.4GHz SSID name'. The second arrow points to 'mySSID_5GEXT' and is labeled 'This is your 5GHz SSID name'. In the bottom left corner, there are three small gray circles arranged vertically.

Step 10. Once completed, you will be prompted with “Created successfully” window. This indicates that the Wi-Fi extender is configured to AP mode. Connect a LAN cable from your wireless router (or local network with internet) to the LAN port of the Wi-Fi extender to start using.

Note: The LAN port of the Wi-Fi extender has a 100mbps connection. Hence, your wireless speed would be up to 100mbps as well.

