


MV2458 Router Quickstart Guide




MV2458 Software Quickstart Guide

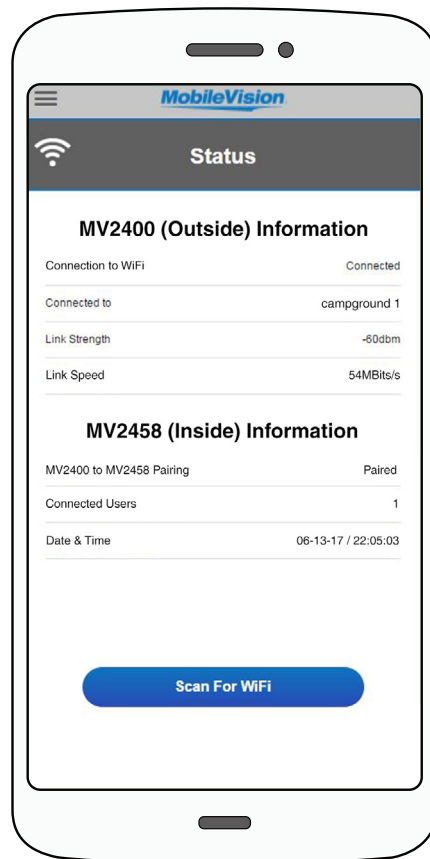

Step 1


Press power button on the MV2458 to power up the Router and wait until all lights are blue and flashing (approximately 2 min).

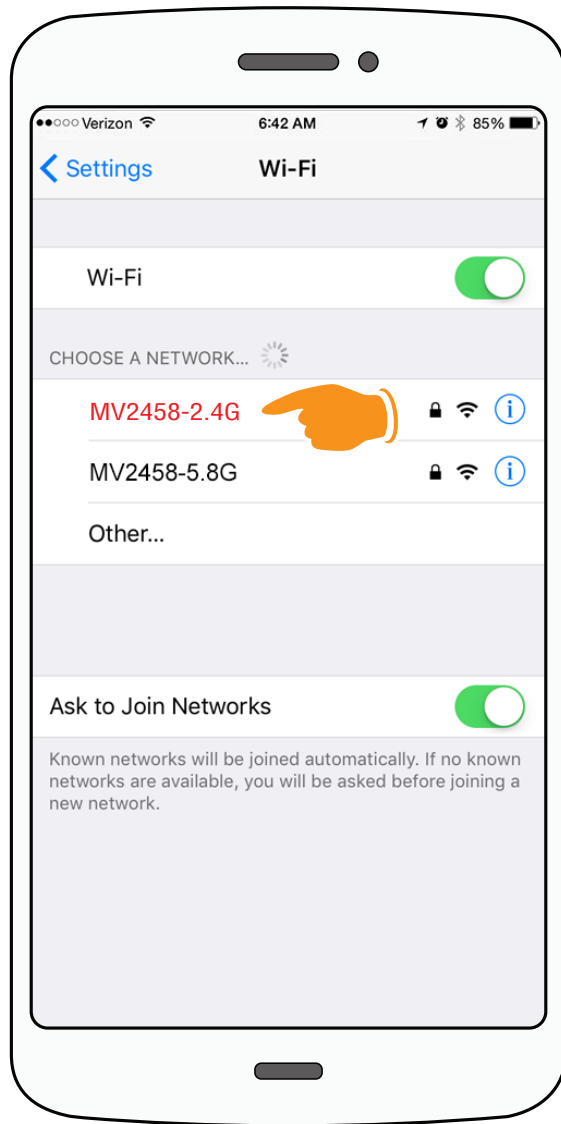

Step 2

Go to the WiFi setting on your device (phone, tablet, laptop, etc., make sure your WiFi is turned on) and click on the **MV2458-2.4G** Network.

MV2458 Software Quickstart Guide

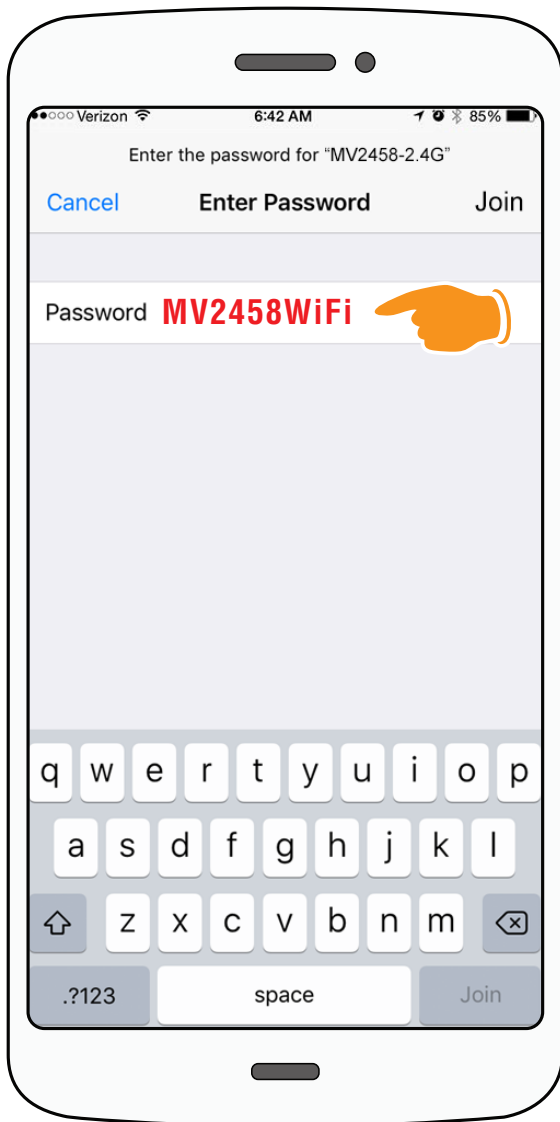


Step 3

In the Password field type in the password **MV2458WiFi** and click the Join button.

Password:
MV2458WiFi


*Case Sensitive

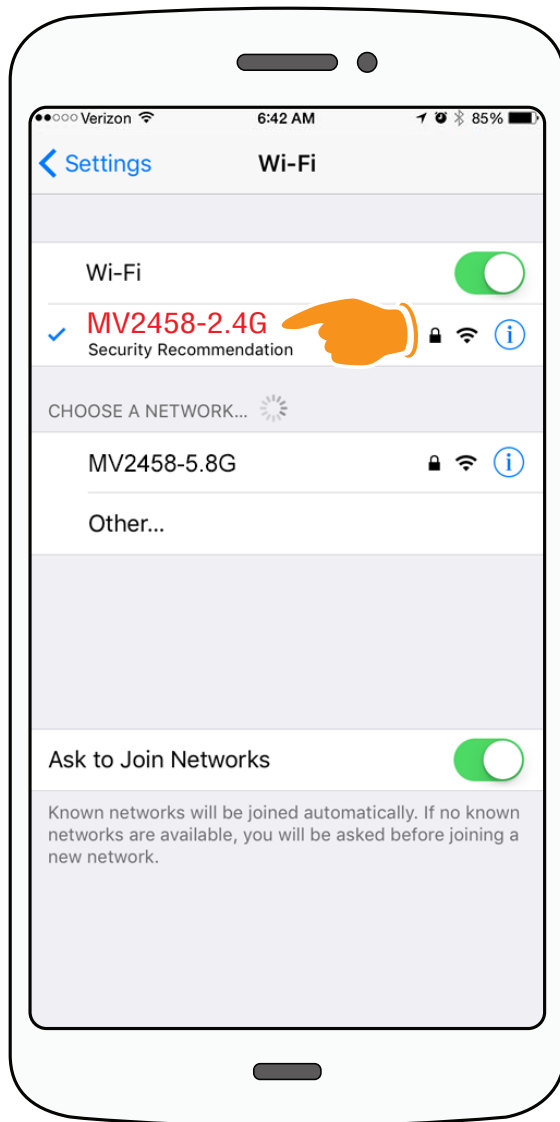

Step 4

Wait until your device is connected to the **MV2458-2.4G** Network.


MV2458 Software Quickstart Guide

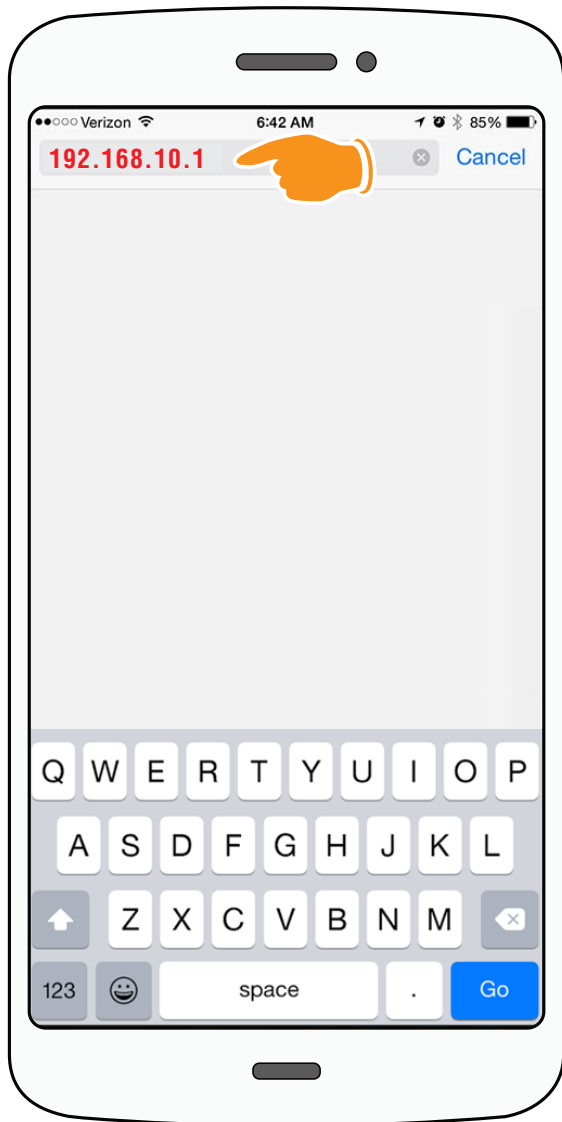

Step 5

Go to your web browser and in the address field type in **192.168.10.1** and click **Go** or hit **Enter**.

Address:
192.168.10.1

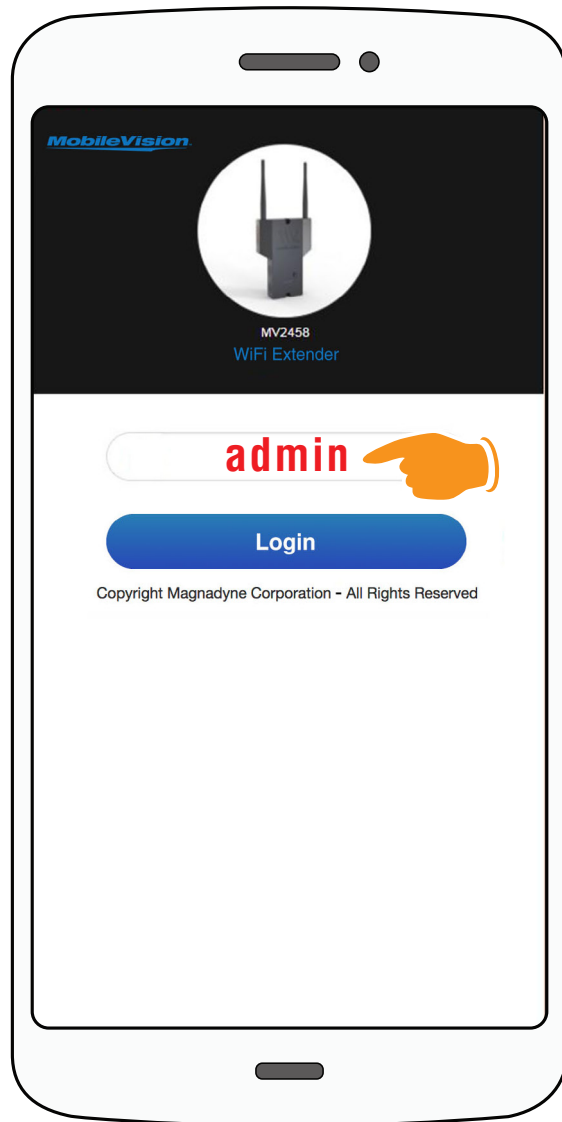

Step 6

The Login screen will open. In the Password field type in the password **admin** and click the **Login** button.


Password:
admin
*Case Sensitive

MV2458 Software Quickstart Guide



Step 7a

Scanning countdown should begin automatically.

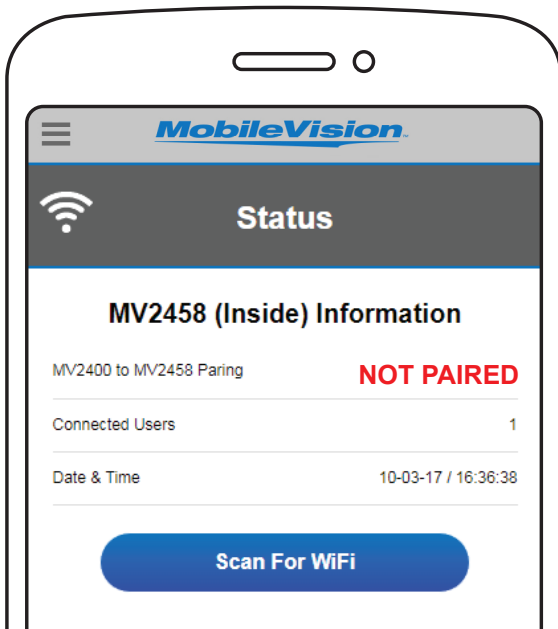

Step 7b


If scanning does not begin and the Status Screen shows the MV2400 and MV2458 are **NOT PAIRED**, go to **Step 14**.



Step 8

The Available WiFi List screen will appear. Click on the WiFi Network that you would like the Router to connect to.

If the scroll bar does not appear and you are using a Mac Computer, move the cursor up and down over the SSID names and the scroll bar should appear.

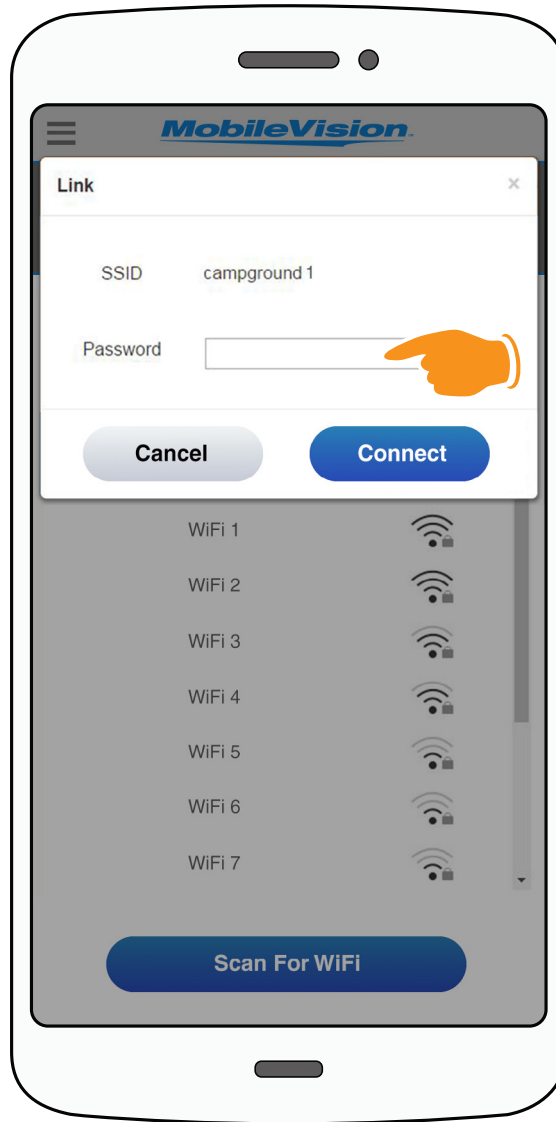

Step 9


The password pop-up window will appear. Type in the password for the chosen WiFi host and click on the **Connect** button.

Please acquire password from WiFi Host at your location.

If previously connected, the password will refresh automatically from your connection history.

If the unit will not connect at this step, it may not have finished its 2 minute boot cycle. Start again from Step 1 and wait 2 minutes for boot cycle to complete.


MV2458 Software Quickstart Guide

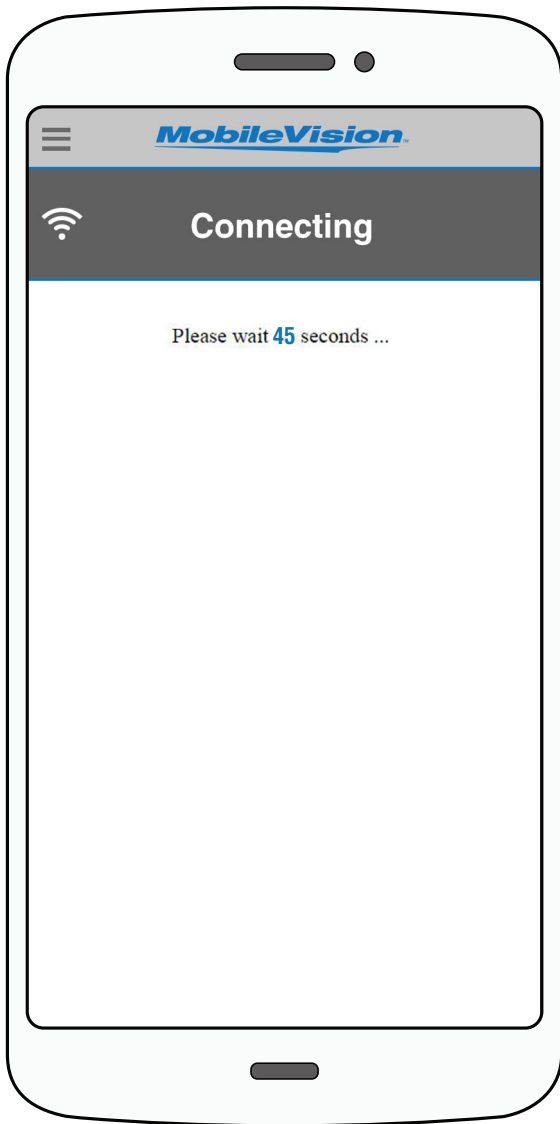

Step 10

The Connecting countdown page will complete and then the Login screen will open.

You must wait 2 minutes after hitting the connect button for the unit to complete its connection. 45 seconds will result in a failed connection.

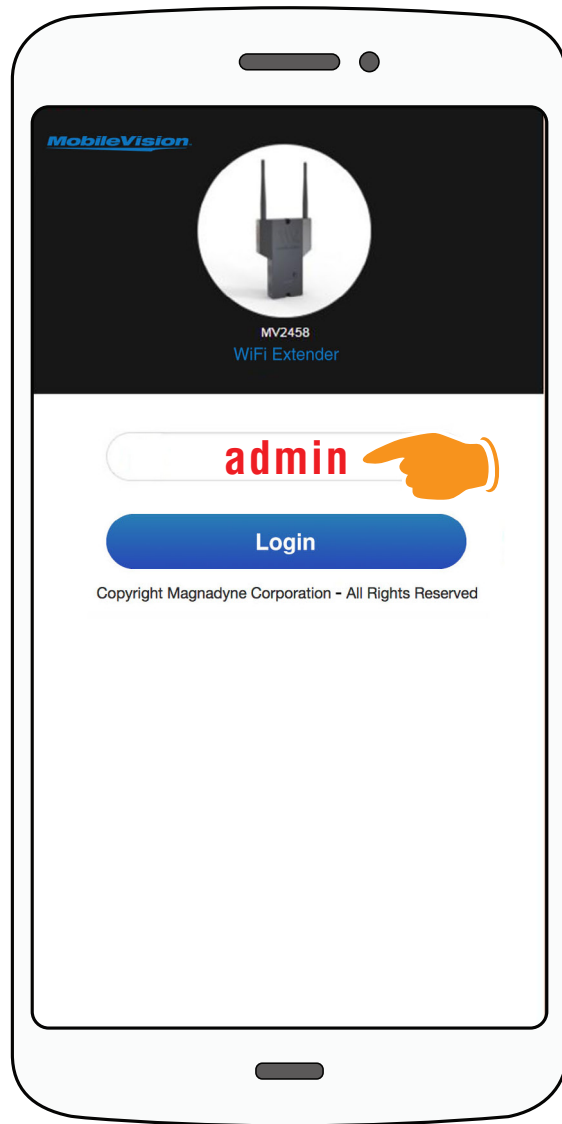


Step 11

In the Password field type in the password **admin** and click the **Login** button. If login is successful, the unit will proceed to **Step 13**.

Password:
admin

**Case Sensitive*


MV2458 Software Quickstart Guide

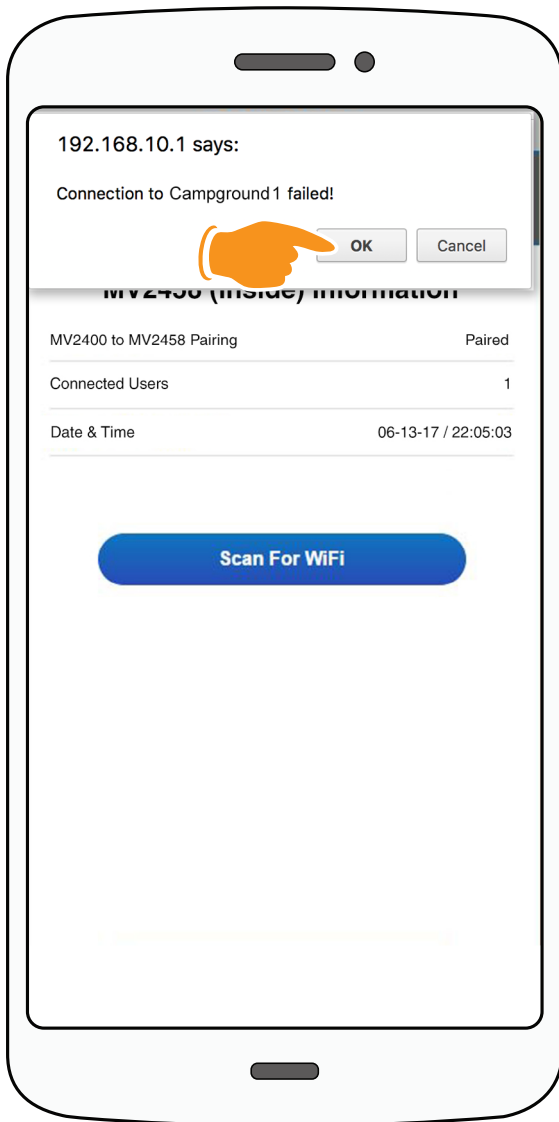

Step 12

If the password was **not** typed correctly a pop-up window will appear stating that the connection to the Network failed. Click the **OK** button. The unit will return to **Step 7** and scan again.

Double check you are typing the correct Network password.

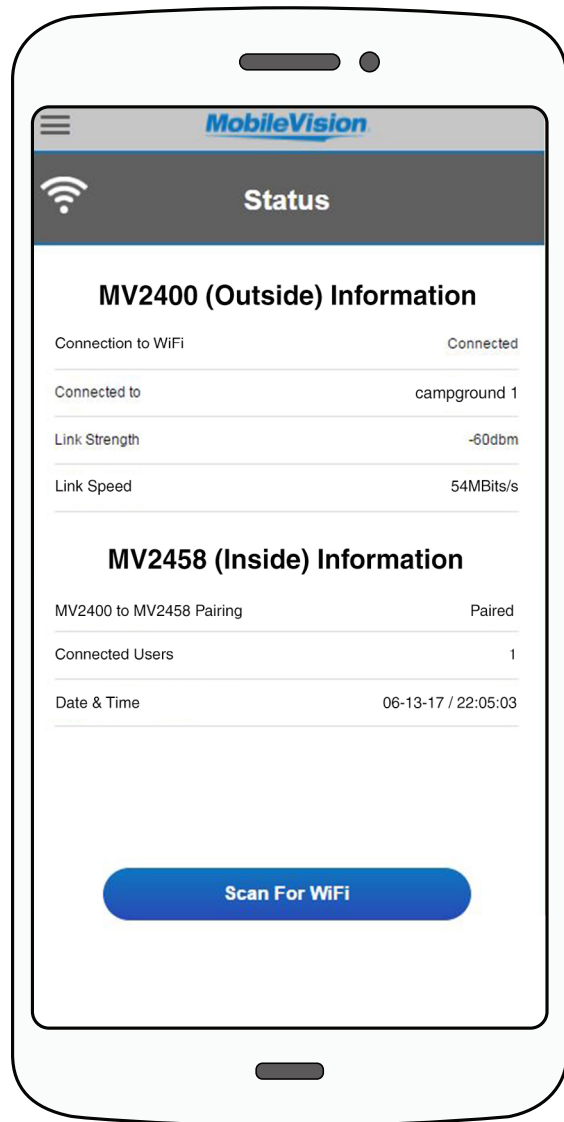


Step 13

The Status Screen will appear showing the connected Network under the title MV2400 (Outside) Information.

Congratulations, Setup Complete.


Pair MV2400 to MV2458

The MV2458 and MV2400 have been paired at the factory, and are ready to use together. If they become disconnected or switched with a new unit, use **Steps 14-19** to pair the MV2400 to the MV2458 for proper operation.

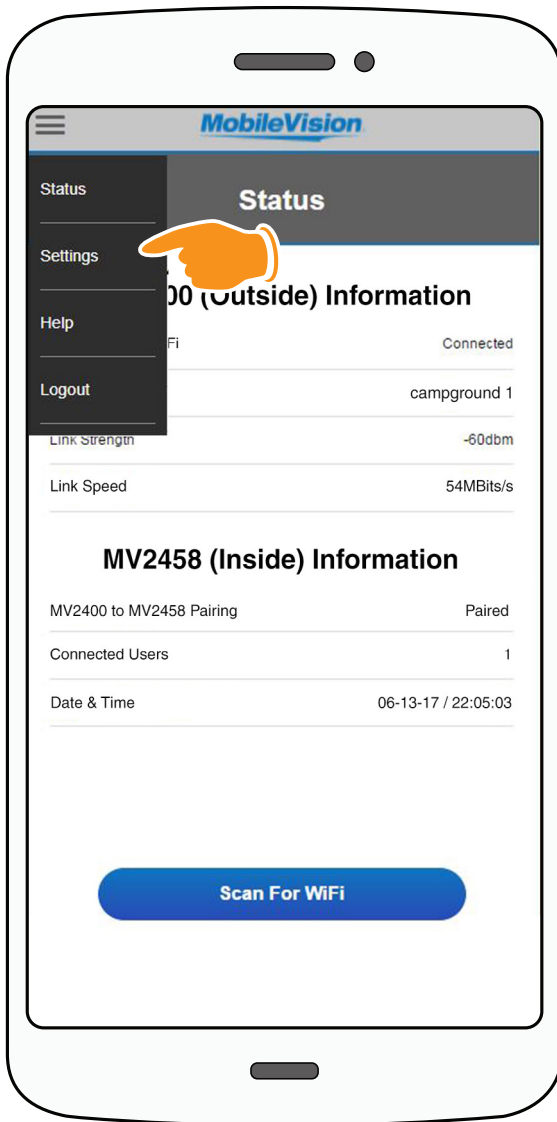

Step 14


Select **Settings** from the drop-down menu.

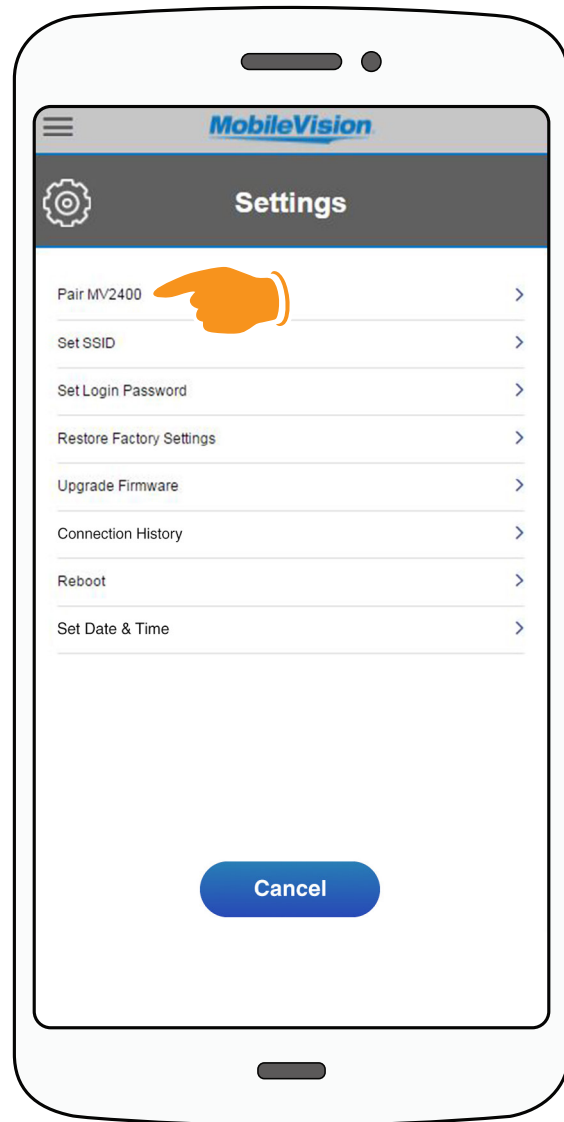

Step 15

In Settings select **Pair MV2400**.

Pair MV2400 to MV2458

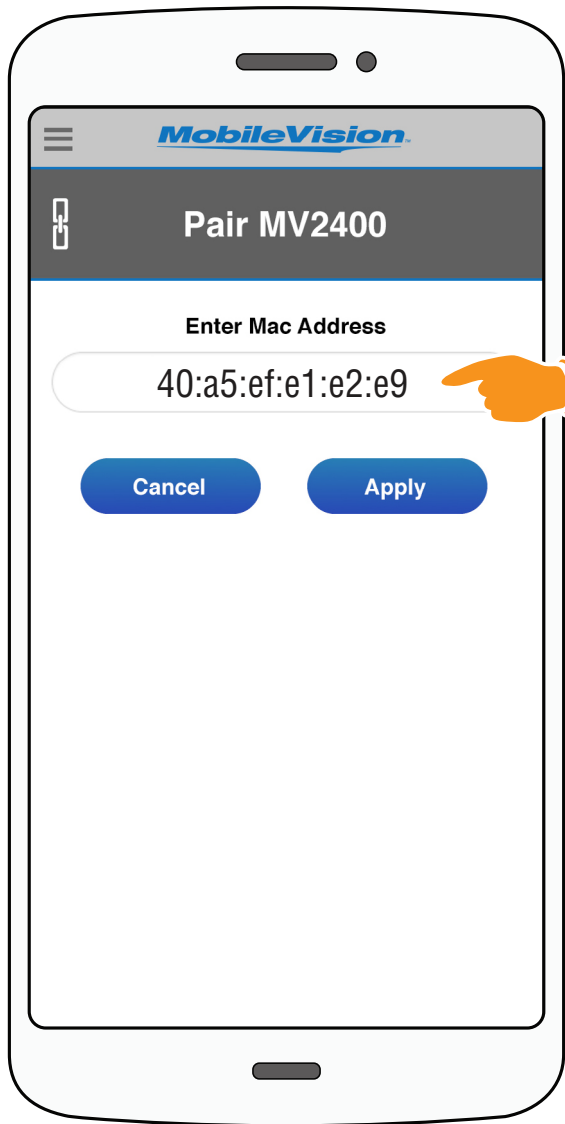


Step 16

Enter the Mac Address in the user's manual or the address listed on your device.

The MAC address will have the format of XX:XX:XX:XX:XX:XX (Example 40:a5:ef:e1:e2:e9).


It is important to enter this number exactly as displayed on the device or in the user's manual. The MAC address entered **MUST** match the device you are connecting to.

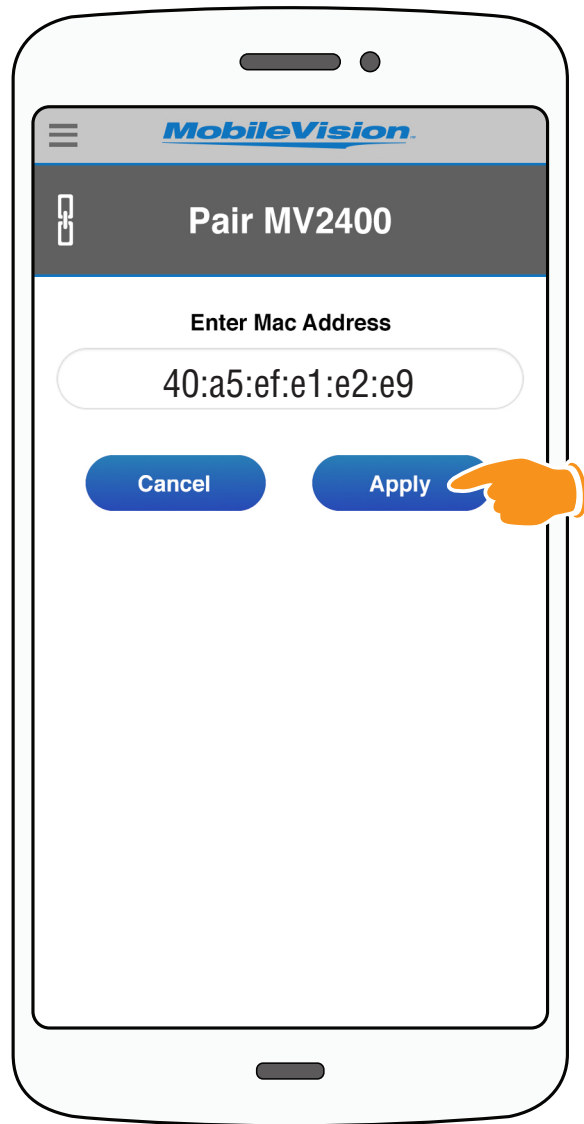

Step 17


After entering the MAC address click the **Apply** button.

Pair MV2400 to MV2458

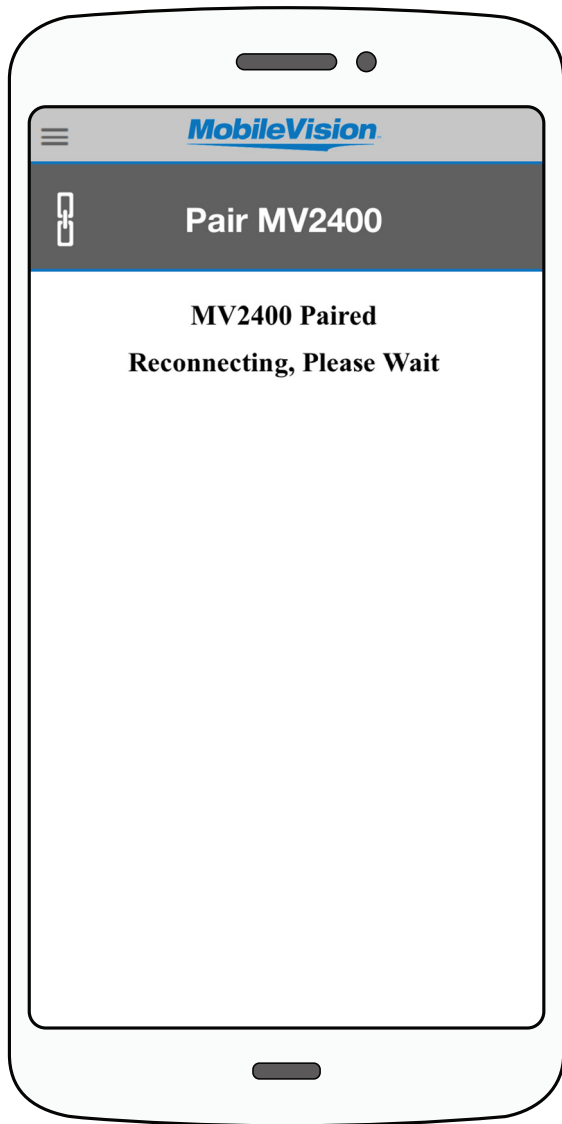

Step 18

Wait until the Pair MV2400 countdown has completed.

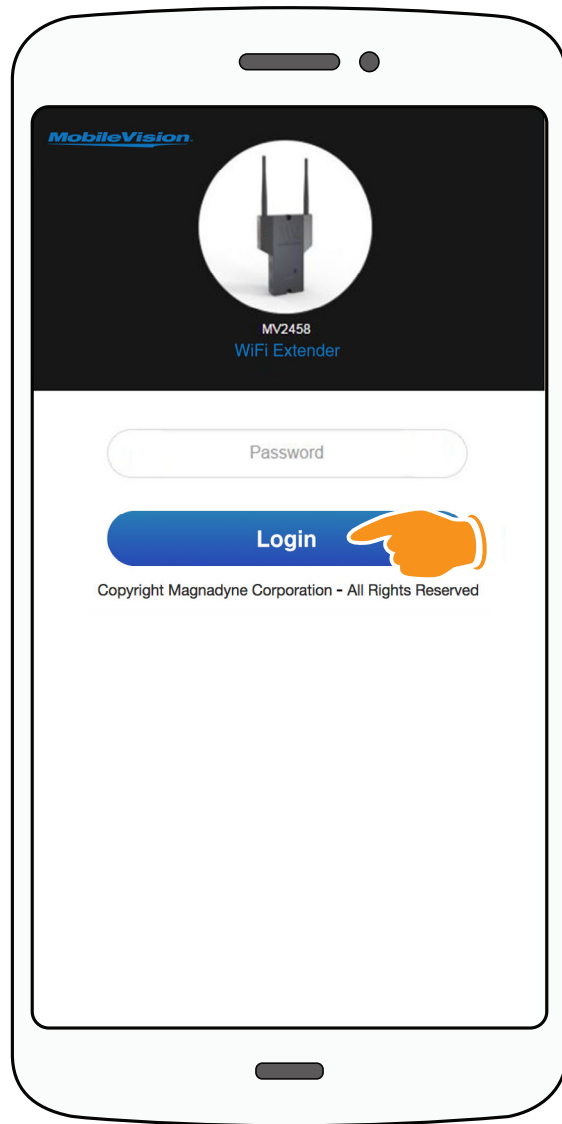

Step 19

Return to Page 4, Step 6 to connect to WiFi.

