

Other ORIGINAL lamps P27/7W

Original spare part



The cost-effective original spare parts

Discover additional ORIGINAL signal lamps from OSRAM. All of our ORIGINAL products feature the reliable premium quality and can be used as original spare parts for different lamp types.

Product datasheet

Technical data

Product information

Order reference	3157
Application (Category and Product specific)	Auxiliary lamp


Electrical data

Power input	29.2 / 7.7 W
Nominal voltage	12.0 V
Nominal wattage	27/7 W
Test voltage	13.5 V
Power input tolerance	±10 / ±10 %

Photometrical data

Luminous flux	402 lm
Luminous flux tolerance	±15 / ±15 %

Dimensions & weight

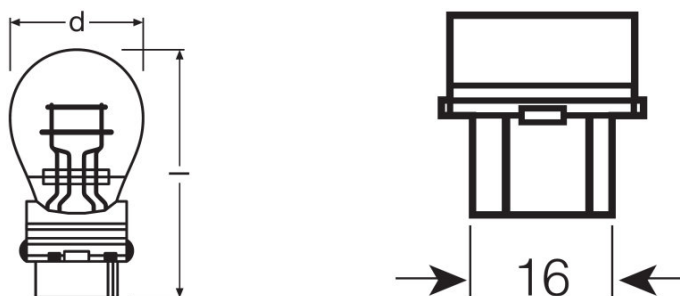

Diameter	25.4 mm
Product weight	7.40 g
Length	53.3 mm

Lifespan

Lifespan B3	550 / 2300 h
Lifespan Tc	1315 / 5500 h ¹⁾

¹⁾ Filament 1 / Filament 2

Additional product data

Base (standard designation)	W2.5x16q
-----------------------------	----------

Product datasheet

Capabilities

Technology	AUX
------------	-----

Certificates & standards

ECE category	P27/7W
--------------	--------

Country specific categorizations


Order reference	3157
-----------------	------

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899183414	Other ORIGINAL lamps P27/7W	Unpacked 1	- x - x -		7.40 g
4052899183421	Other ORIGINAL lamps P27/7W	Folding carton box 10	- x - x -		
4052899183438	Other ORIGINAL lamps P27/7W	Shipping carton box 50	181 mm x 154 mm x 90 mm	2.51 dm ³	530.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

File
 360 Degree Image ORIGINAL P277W 3157

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM

