

SPECIFICATION

NEXLEDS[®]
NEXLEDS LTD



LED Linear

3 CCT Wrap

Specification:

Product Name:	LED Linear
Model:	NX-RALS435 -40W
Input Voltage:	120VAC 50/60Hz
Luminous Efficacy:	100 lm/W
CRI (Ra):	>80
Power Factor:	>0.95
Working Temperature:	-40°C~+80°C
Storage Temperature:	-30°C~+45°C
Beam Angle:	120 °
IP Grade:	IP40
Environment:	Suitable for damp location
Material:	Fe+PC
Life-span:	50000Hrs
Warranty:	5 years
Certification:	DLC, ETL
Product Size:	L47.40* W5.31*H1.77 inch
Color Temperature:	3000K ✓ 4000K ✓ 5000K ✓



www.nexleds.ca




Email: sales@nexleds.ca

NEXLEDS[®]

NEXLEDS LTD


Dimension(Unit: inch)

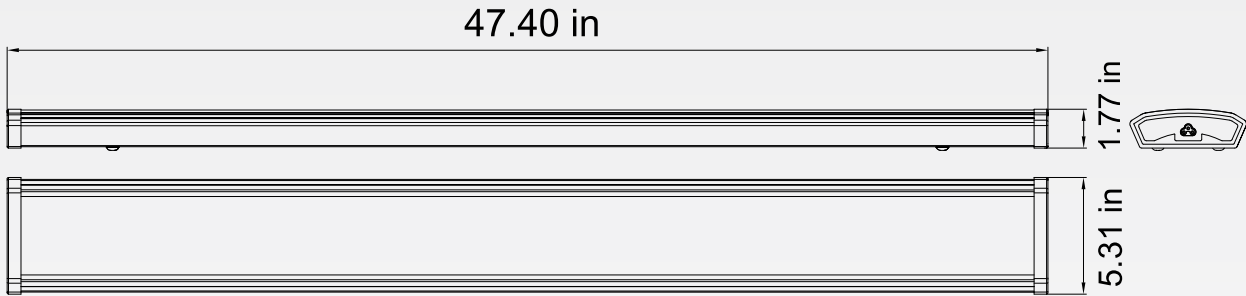

Packing:

NX-RALS4XX-40W

Inner box (pcs)	Inner box size /inch	G.W. / Inner box
1	L48.4*W5.7*H2.1 inch	1.8KGS
Carton (pcs)	Carton size /inch	G.W. / Cartn
4	L 49.2*W10.12*H6.7 inch	8.4KGS

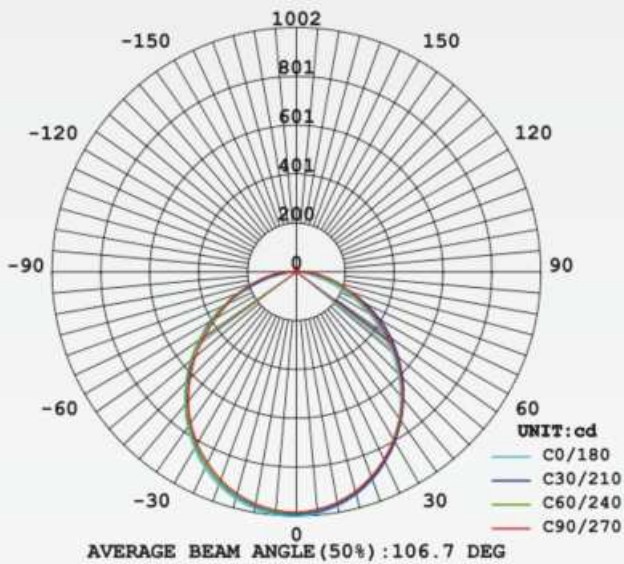

Instruction:

1. Please read the product specifications carefully first and confirm that the environment is in accordance with the specifications on the specifications before you can install and use them.
2. Before the product is connected to the power supply, make sure the switch is in a disconnected state.
3. Lamps shall be installed by qualified electricians and the wiring shall comply with IEC electrical standards or national standards;
4. This product is suitable for indoor use;
5. Do not use too long or too low voltage in the state of long-term use will affect the normal use of function and life;
6. Shall not be installed in flammable objects and the lamps can't be covered by heat insulation materials or similar materials!
7. When installing, changing and cleaning the lamp, the power supply must be cut off to ensure personal safety;
8. When the lamp is found to work abnormally (self extinguishing or flashing), please check the contact performance of the connecting plug and whether the supply voltage is normal. Often, the failure has not been ruled out, new lights need to be replaced;
9. When the lamp surface needs cleaning, please disconnect the power supply first! Wipe with a soft cloth sticky soapy water wring dry, and then use dry cloth to clean, please don't wait to wipe the surface of the light volatile substance use banana water, please do not spray any chemicals on the lamp, the lamp may otherwise discoloration or damage.
10. Please do not disassemble the product avoid to damage the internal parts. Self removal cannot enjoy warranty service.