

2x4 LED SELECTABLE CEILING PANEL

Installation Manual



EASY INSTALLATION Recessed Mount

1. Turn off circuit breaker before installing.

2. Place Ceiling Panel face down on flat surface.

- Unscrew 2 driver covers and set aside screws.

3. Pop out knockout (choice of 6).

- **Optional:** If using dimmer, pop out 2nd knockout.

4. Use switches to choose CCT and brightness settings:

Brightness	CCT
-40W	-4000K
-50W	-5000K
-60W	-6000K

5. Connect conduit to each knockout.

- Feed wires through.

6. Connect supply wires to Ceiling Panel wires with included wire nuts:

- Black to Black (Live)
- White to White (Neutral)
- Green to Green (Ground)

OPTIONAL: To use dimming feature, connect pink and purple wires on Ceiling Panel to compatible dimmer (not included).

7. Replace driver covers.


- Tighten screws.

8. Bend 4 protective brackets located on back of Ceiling Panel up 90°.

9. Turn brackets 90°. Hook should face outside edge of Ceiling Panel.

10. Turn on circuit breaker and test light.

WIRING DIAGRAM

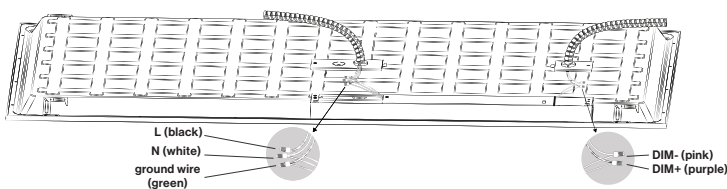

SPECIFICATIONS


Voltage	100-277V
Wattage	40W / 50W / 60W
Moisture Rating	Damp
Housing Material	SPCC+PS Lens
Weight	4.18lbs
Warranty	7 Years

2x4 LED SELECTABLE CEILING PANEL

Installation Manual



EASY INSTALLATION Suspension Mount




1. Turn off circuit breaker before installing.

2. Place Ceiling Panel face down on flat surface.

- Unscrew 2 driver covers and set aside screws.


3. Pop out knockout (choice of 6).

- **Optional:** If using dimmer, pop out 2nd knockout.



6. Connect supply wires to Ceiling Panel wires with included wire nuts:

- Black to Black (Live)
- White to White (Neutral)
- Green to Green (Ground)




4. Use switches to choose CCT and brightness settings:


Brightness	CCT
-40W	-4000K
-50W	-5000K
-60W	-6000K

5. Connect conduit to each knockout.

- Feed wires through.




OPTIONAL: To use dimming feature, connect pink and purple wires on Ceiling Panel to compatible dimmer (not included).



7. Replace driver covers.


- Tighten screws.



8. Drill 4 holes into ceiling.


9. Place anchors into hole, insert wire rope, and screw.

- Refer to suspension kit's (not included) install manual for complete details.



10. Adjust support rope/wire to ensure Ceiling Panel hangs horizontally.

11. Adjust light into ceiling and secure using protective brackets.



Turn Power ON

12. Turn on circuit breaker and test light.

WARNING

To reduce the risk of fire, electric shock, or physical injury:

- Turn off circuit breaker before installing this fixture.
- This product should be installed by a person familiar with the construction and operation of the product and hazards involved. Safety eyeglasses and gloves are recommended.
- Abide by related regional and local laws or regulations.
- Proper grounding is required to ensure safety.
- Check for shipping damage before installing. If the product is damaged, do not use it.
- Keep fixture away from corrosive substances.
- Clean fixture regularly to ensure proper operation. Do not clean with harsh solvents.
- Use safety precautions and abide by regional and local laws or regulations.
- This product is not compatible with 3rd party sensors.