LANDSCAPE LIGHTING - PATHWAY

INSTALL INSTRUCTIONS

PLEASE FIND A QUALIFIED ELECTRICIAN FOR INSTALLATION. Please read the instructions before you install and use the luminaire.

- Turn circuit breaker(s) off or remove fuse(s) before installation.
- · Fixture(s) must be installed in accordance with all local codes and ordinances.
- DO NOT install within 10 feet of a pool spa or fountain.

SUITABLE FOR MOUNTING WITHIN 4 FT OF THE GROUND.

SUITABLE FOR WET LOCATIONS.

SAFETY INFORMATION - TO REDUCE THE RISK OF FIRE, OR INJURY TO PERSONS:

- Turn off/unplug and allow to cool before replacing lamp.
- · Lamps get hot quickly. Contact only switch plug when turning on.
- · Do not touch hot lens, guard or enclosure.
- Keep lamp away from materials that may burn.
- Do not touch the lamp at any time. Use a soft cloth. Oil from skin may damage lamp.
- Do not operate the luminaire fitting with a missing or damaged shield.

SAVE THESE INSTRUCTIONS




WARNING DISCONNECT POWER BEFORE INSTALLING OR SERVICING.

This is a low voltage fixture for use with a maximum of 25A, 15V power units. A remote transformer is required. The main cable from the power units should be buried for less than 6 inches under the ground level and can be purchased.

LUMINAIRE MOUNTING (with PVC Spike)

- 1. Run wire pigtail from luminaire through the mounting hole in the top of the PVC Spike.
- 2. Thread PVC Spike into the fixture.
- Place PVC Spike in the desired position and insert into the ground until flange of PVC spike is flushed to grade level.
- 4. Attach fixture(s) wires pigtail to main supply cable with connector (not provided) suitable for direct burial.
- Provide power to the luminaire and check the proper operation.

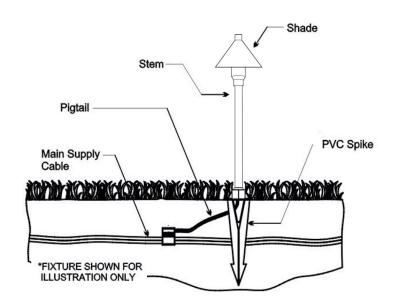

LAMP REPLACEMENT

- 1. To prevent electrical shock, disconnect transformer from electrical supply before service.
- 2. Remove lens cover to expose lamp.
- 3. Replace lamp with correct wattage and type marked on fixture label. Replace lens cover.

Note: DO NOT touch lamp with bare hands. Always use a soft cloth to handle lamps.