

LED WRAP A-ROUND

INSTALL INSTRUCTIONS

PLEASE FIND A QUALIFIED ELECTRICIAN FOR INSTALLATION. Please read the instructions before you install and use the luminaire.

WARNING, CAUTIONS AND OPERATING INSTRUCTIONS

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For the installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

WARNING: RISK OF FIRE OR ELECTRICAL SHOCK

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- All wiring connections should be capped with UL approved wire connectors.


CAUTION: RISK OF INJURY

- If the lens is removed, avoid looking directly at the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.
- Risk of burn. Disconnect power and allow fixture to cool before handling fixture.
- Green ground screw provided in proper location. DO NOT RELOCATE.
- Minimum 90° supply conductors.
- Suitable for Dry or Damp locations.


! WARNING DISCONNECT POWER BEFORE INSTALLING OR SERVICING.

INSTALLATION

1. Remove the fixture from packaging.
2. Remove lens by pulling over lip on one side of the fixture and rotate on the other side; lift lens off.
3. For mounting, use the mounting holes on each end of the fixture housing. Mount per required application:
 - **SURFACE:** Secure the fixture to the mounting surface.
 - **CHAIN MOUNTING WITH V-HOOK (Sold Separately):** Attach customer supplied V-hooks to fixture. Attach customer supplied chain to the V-hooks and mounting surface
 - **CABLE MOUNTING (Sold Separately):** Mount customer supplied cable to the luminaire. Wrap one end of cable to the beam, then insert into the hasp, adjust the cable to the desired height.
4. Make electrical connections according to the General Wiring Diagram and local electrical codes.
5. Install junction box cover.
6. Install lens on one side of the fixture and push up to engage the opposite side. Make sure the lens has seated securely over fixture lips by gently pulling down along both sides.

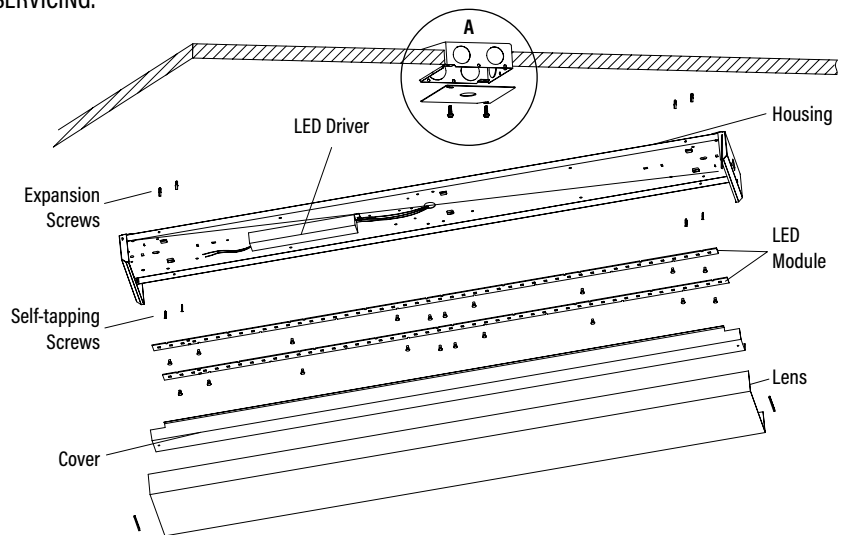

A - Concealed Outlet Box



GENERAL WIRING DIAGRAM

