


# LED SHOEBOX LIGHT

## Installation Manual


### COMPONENTS



x1  
Adjustable Slip  
Fitter (AM)



x1  
Dusk-to-Dawn  
Photocell Sensor

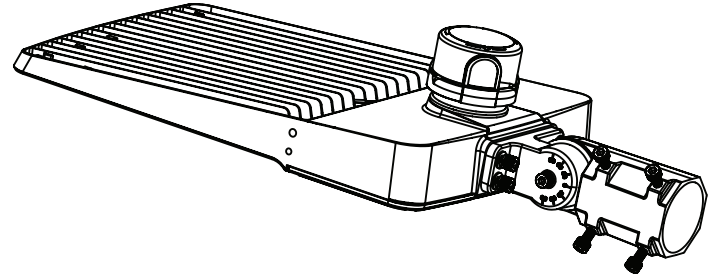

### IMPORTANT SAFETY INSTRUCTIONS

- Please review instructions carefully before proceeding.
- Risk of fire. Consult a qualified electrician to ensure correct branch conductor.

### EASY INSTALLATION Adjustable Mount

|  |  |  |   |
|--|--|--|---|
|  | <p>1. Turn off circuit breaker before installation.</p>  |  | <p><b>Note:</b> If using dimming function, connect dimming wires:<br/>a. Dim+ (Pink)/DC+<br/>b. Dim- (Purple)/DC-</p> |
|  | <p><b>Note:</b> To adjust wattage, remove 0.75" plug from location shown in image.</p> <ul style="list-style-type: none"> <li>• Once desired wattage is reached, re-insert plug.</li> <li>• Tighten until secure.</li> </ul> |  | <p>4. Secure Allen Screws until fixture does not rotate or slide.</p>   |
|  | <p>2. Loosen all 4 Allen Screws until bracket can easily slide onto light pole.</p>  |  | <p><b>Note:</b> If desired, you may adjust fixture until preferred orientation is achieved (0-90°).</p>               |
|  | <p>3. Connect to fixture wires to supply wires using wire nuts:</p> <ul style="list-style-type: none"> <li>a. Black to Black (Live)</li> <li>b. White to White (Neutral)</li> <li>c. Ground to Ground</li> </ul>             |  | <p>5. Turn on circuit breaker and test light.</p>   |

### WARNING

- To reduce the risk of fire, electric shock, or physical injury:**
- Turn off circuit breaker before installing this fixture.
  - This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and hazards involved.
  - Min. 75°C supply conductors.
  - Abide by related regional and local laws or regulations.
  - Proper grounding is required to ensure safety.
  - Do not cover the fixture with thermally insulating material.
  - Check for shipping damage before installing. If the product is damaged, do not use it.
  - Keep fixture away from corrosive substances.
  - This fixture is wet rated. Suitable for outdoor environments ranging from -31°F-122°F (without motion sensor), -22°F-122°F (with motion sensor).
  - Clean the fixture regularly to ensure proper operation. Do not clean with harsh solvents.
  - Use safety precautions and abide by regional and local laws or regulations.
  - This product is not compatible with timing devices.
  - This product is not compatible with third party photo sensors.
  - This product is not compatible with third party sensors.
  - This product is not compatible with occupancy sensors.

### SPECIFICATIONS

|                  |           |
|------------------|-----------|
| Voltage          | 120V-277V |
| Wattage          | 150W      |
| Moisture Rating  | Wet Rated |
| Housing Material | Aluminum  |
| Weight           | 7.2 lbs   |
| Warranty         | 7 years   |