

Designed by Robert Dudley Best

PRODUCT



Item no.: 001-0613X
+ style code

Don't polish the brass
DESCRIPTION

Bestlite has been in continuous production since 1930. Robert Dudley Best created Bestlite design. He was highly influenced by the Bauhaus. In the past 80 years, people appreciated the lamps and it decorates many homes, hotels and restaurants worldwide. Loved by architects, designers and design aficionados throughout its 80-year history, today, Bestlite enjoys global iconic status.

VERSION - BESTLITE WALL LAMP BL6

Shade: Charcoalblack, Matt-White or Grey
Tube and arm: Brass with lacquered surface

Shade and base: Brass with lacquered surface
Tube and arm: Brass with lacquered surface

RAL codes are indicative.

- Fabric wire - Black:
- Charcoal black/Brass / White inside // RAL 9011 / RAL 9003 // Gloss level 20 / Gloss level 20
- Grey w/Brass / White inside // RAL 2604005 / RAL 9003 // Gloss level 30 / Gloss level 20
- Brass w/Brass / White inside // - / RAL 9003 // - / Gloss level 20

- Fabric wire - Off-White:
- Matt-White w/Brass / White inside // RAL 9003 / RAL 9003 // Gloss level 20 / Gloss level 20


Please contact us for other colours or finishes.

VERSION

Order item - look for part number in the pricelist.

Series contains the following:

BL5, BL6, BL7, BL10

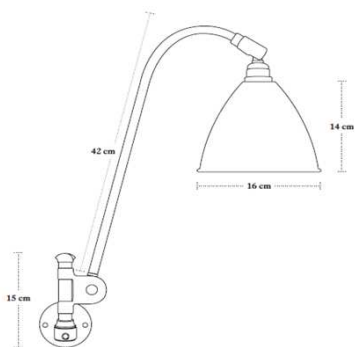

COLOURS



// Charcoal black / Brass



// Grey / Brass



// Matt-White / Brass



// All Brass

FACTS

MEASUREMENT - L X W X H MM

- Lamp height: 150+420 mm
- Tube length: 150 mm
- Shade height: 140 mm
- Shade diameter: Ø160 mm
- Cord - total length w/sw: App. 2400 mm
- Cord - exposed out of lamp: App. 2000 mm

WEIGHT ITEM - LAMP INCL. WIRE
1024 g

PACKAGING TYPE
White cardboard box w/ 5ply corrugated

PACKAGING MEASUREMENT - L X W X H CM
L:22 x W:61 x H:26 cm

- WEIGHT PACKAGING - MATERIAL TYPE**
- Paper Egg crate: 834,5 g
 - PE polybag: 60 g
 - Bestlite key: 18 g
 - PE polybag: 1 g
 - Cardboard inside: 98,5 g
 - Cardboard outside: 768 g

WEIGHT PACKAGING - TOTAL
2802 g

NUMBER OF PARCELS
1 pcs.

- LIGHT SOURCE**
- Socket: E14 base
 - Recommended light source: *All fluorescens light bulbs*
 - Recommended wattage: 9 W ~ (40 WATT incandescent bulbs)
 - Max wattage: 13 W

- Recommended light source: *Halogen light bulb*
- Recommended wattage: 28 W ~ (40 WATT incandescent bulbs)
- Max wattage: 28 W

- All lamps can be fitted with a dimmer.
Please contact your local electrician.

- Lightbulb not included

BESTLITE BL6 // WALL LAMP, HARD WIRED (UNSWITCHED), EU MODEL

BESTLITE COLLECTION

Designed by Robert Dudley Best

CLEANING AND MAINTENANCE

Use a soft damp cloth when cleaning your Bestlite lamp. Do not use household cleaners.

ACCESSORIES

-

ENVIRONMENT

-

TESTS

-

CERTIFICATION AND LABELS

CE-CERTIFIED

STOCK - BL6 Hard-wired (unswitched):
No cord, no switch
(to be mounted directly on electrical outlet)

- Euro voltage: 230 V
- Frequency: 50 Hz
- Supply voltage: AC power ~
- Normally Closed IP20



Class II / Double insulated



CE-Mark



Luminaires accepted for mounting on a flammable base

KOMPONENTS

- 01 // Shade Ø16 cm.
- 05 // E14 lamp holder
- 10 // Insulating ring
- 11 // Internal shade ring
- 12 // External shade ring
- 13 // Lamper holder cover
- 15 // Universal joint
- 16 // Bestlite arm
- 18 // Bestlite clip
- 19 // Bestlite nut
- 20 // Bestlite bolt
- 21 // Tension spring
- 22 // Fibre washer
- 23 // Cord grip
- 24 // Cord grip cover
- 25 // Acetate
- 26 // Top knob
- 30 // Tube
- 45 // Wall bracket
- 49 // Screw 9x19 mm
- 51 // Mounting plate Ø7 cm

Item no.: 001-0613X



MATERIAL

Shade: Charcoalblack, White or Grey
Tube and arm: Brass with lacquered surface


Shade and base: Brass with lacquered surface
Tube and arm: Brass with lacquered surface

INSTALLATION INSTRUCTIONS

The Bestlite key:

It's a practical tool that enables you to fasten the lamp arm. Simply use it like a screwdriver in the slot in the Bestlite nut.

It's handy for mounting!
Cut out a circle of cardboard and use directly on your wall for accurate placing of the hole. Make use the diameter 7 cm!



Technical information:

Light source: 2x E14 40W Incandescent or 40W Halogen bulb.
Not suited for other changing light bulbs.
The lamp has a maximum power consumption of 80 W.

Some advice on cleaning your Bestlite:

Power cord and parts - base, bracket and shade:
Wipe the parts with a damp cloth instead of water and use a soft lint-free cloth.

Chrome plated parts:

Wipe the parts with a damp cloth and use 0% to 5% of lemon juice.
If the surface is scratched use a mild polish applied sparingly. For abrasions or other soft marks.

Use only mild polish for wiping and polishing. Never use alcohol or other acids.
Do not use abrasive household cleaners.
Do not use water or other cleaning materials, glass cleaner or household ammonia.

BESTLITE - GUBI (Skovbovej 74, 14-210, Copenhagen, Denmark - www.bestlite.com)



Bestlite features:

Comprehensiveness of your Bestlite
The lamp is designed for maximum flexibility and adaptability. It can be used in many different ways. The lamp is designed for maximum flexibility and adaptability. It can be used in many different ways.

Bestlite key:

It's a practical tool that enables you to fasten the lamp arm. Simply use it like a screwdriver in the slot in the Bestlite nut.

BESTLITE
SINCE 1930

