





**INSTRUCTIONS** 

# Nifty

Change Table Instruction manual

#### **PERSONS REQUIRED**



#### **TOOLS REQUIRED**

- PHILLIPS HEAD SCREWDRIVER


Congratulations and thank you for purchasing an ubabub product.


As for our entire range of clearly modern nursery furniture, during the design and production of this product we have selected materials that are either recyclable or derived from sustainable practices.


#### **Contents**

| Contents & Hardware |                                 | 3  |
|---------------------|---------------------------------|----|
| Care & Maintenance  |                                 | 4  |
| Α                   | Prepare front and end panels    | 5  |
| В                   | Prepare side rails with shelves | 6  |
| С                   | Install shelves position        | 7  |
| D                   | Front panel position            | 8  |
| E                   | Front panel position            | 9  |
| F                   | Base plate assembly             | 10 |
| G                   | Finished assembly               | 11 |

#### **Contents**

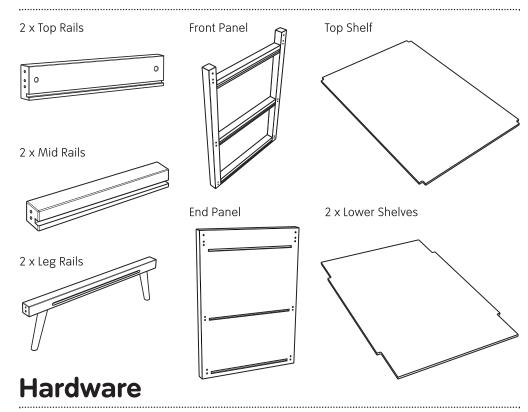









12 x Connector Pin 12 x Locking Cam 16 x Support Pin 4 X Base Plate 16 x 20mm screws

2

## Care & Maintenance

# Important information! Read carefully and retain for future reference!

Please ensure that you follow the assembly instructions provided in detail, to ensure the safety features of the change table are not compromised. Be sure to check all of the screws 2–3 weeks after assembly, then retighten as necessary.

When assembling the change table do not over tighten the screws or fittings until the entire unit is assembled. This will make the assembly easier. After assembly, check and tighten all screws and fittings. Do not use the change table if any parts are damaged or missing, and only use spare parts approved by Ubabub. Loose screw connections or parts could lead to the baby trapping a body part, or clothing (e.g. strings, necklaces, ribbons for babies dummies, etc) which would pose a risk of strangulation.

Make sure there are no loose parts in the change table which a child could swallow, as this could lead to suffocation or choking. Additionally make sure that there are no loose parts in the change table that could provide a foothold for your child.

The room positioning of your change table is very important to the safety of your child.

- Make sure the change table is placed on a level and stable surface.
- Do not expose the furniture to direct sunlight, direct heat sources, extreme changes in temperature or moisture.
- Ensure the change table is placed at a reasonable distance from curtains, blinds, heaters and powerpoints.
- Make sure to keep medication, string, elastic, small toys or small items, such as money, out of the reach from any position in the change table.

#### RECOMMENDED CHANGE TABLE MATTRESS SIZE

This unit has been designed to suit change table mattresses upto the size of 500mm wide x 750mm long

#### **CLEANING & MAINTENANCE**

Clean furniture by wiping the surface with a soft cloth dampened with water. Surplus water must be wiped off.

Wipe up spills immediately with a soft, clean cloth.

Urine spills can cause discolouration and is a growth medium to mould fungus.


If necessary clean furniture using a mild soap solution and wipe clean with a soft cloth dampened with water and then dry with a soft cloth.

Do not use strong household cleaners on the furniture.



### Prepare front and end panels


- **Step 1** Clear floor space.
- **Step 2** Lay end panel on the ground with the screw holes facing up. Using a screwdriver insert connecting pins to the six points per panel as per diagram.
- **Step 3** Repeat on front panel.

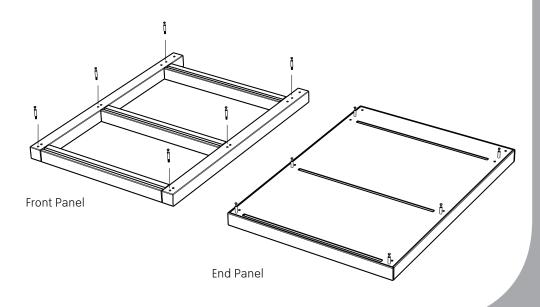



### Prepare side rails with shelves


- **Step 1** Select a leg rail and insert a support pin into the hole situated above the locking cam hole on the end of the leg rail, then repeat for other end of leg rail.
- **Step 2** Repeat on other leg rail.
- **Step 3** Select a lower shelf and align with the recessed slots of the leg rails and install shelf into both leg rails as per diagram.
- **Step 4** Select a mid rail and insert a support pin into the hole situated above the locking cam hole on the end of the mid rail, then repeat for other end of mid rail.
- **Step 5** Repeat on other mid rail.
- **Step 6** Select a lower shelf and align with the recessed slots of the mid rails and install shelf into both mid rails as per diagram.
- Step 7 Select a top rail and insert support pins into the two holes, situated above and below the centre locking cam hole on the end of the top rail, then repeat for other end of top rail.
- **Step 8** Repeat on other top rail.
- **Step 9** Select top shelf and align with the recessed slots of the top rails and install shelf into both top rails as per diagram.

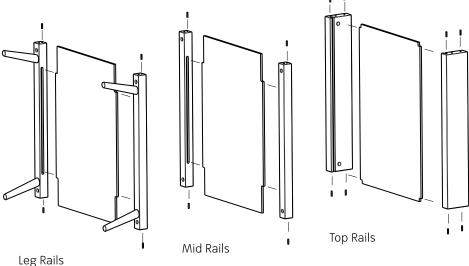

# C

### **Install shelves position**

- **Step 1** Lay End panel on the ground with the slots, holes and connecting pins facing up.
- **Step 2** Select lower shelf joined to leg rails.
- Step 3 Align with the bottom edge of the end panel, align the shelf, connecting pin and support pin, then slide the leg rails, including lower shelf onto the end panel until it fits tightly to the end panel as per diagram.
- Step 4 Insert Locking Cams on both rails with the arrow pointing towards the connecting pin.
- Step 5 Use screwdriver to turn the locking cam clockwise, half a full turn until tight.
- **Step 6** Select lower shelf joined to mid rails.
- Step 7 Align with the middle slot of the end panel, align the shelf, connecting pin and support pin, then slide the mid rails, including lower shelf onto the end panel until it fits tightly to the end panel as per diagram.
- **Step 8** Repeat steps 4 & 5.
- **Step 9** Select Top shelf joined to top rails.
- Step 10 Align with the top slot of the end panel, align the shelf, connecting pin and support pins, then slide the top rails, including top shelf onto the end panel until it fits tightly to the end panel as per diagram.
- Step 11 Repeat steps 4 & 5.

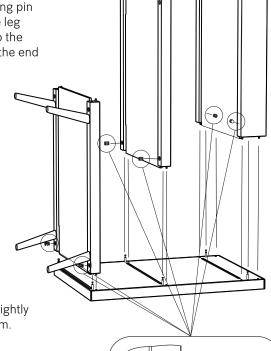




g Kalls



### Front panel position


- **Step 1** Select Front panel, with connecting pins facing the rest of the unit.
- **Step 2** Align connecting pins, support pins and shelves, slowly install front panel checking that all of the pins, support pins and shelves are connecting properly.
- **Step 3** Once the front panel is tightly fit against all of the rails.
- **Step 4** Install the locking cams into all of the rails in a clockwise direction starting at the top RHS rail.
- **Step 5** Insert Locking Cam with arrow pointing towards the connecting pin.
- **Step 6** Use screwdriver to turn the locking cam clockwise, half a full turn until tight.
- **Step 7** Repeat for all six, cam lock points as per diagram.

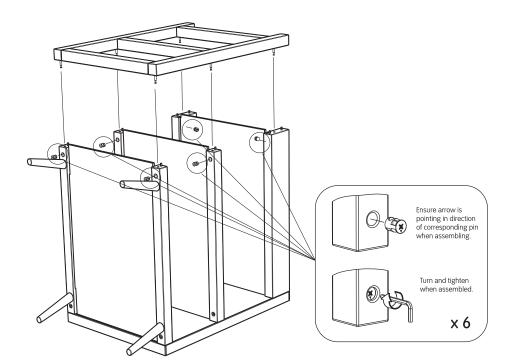

# E

### **Base plate assembly**

- **Step 1** Select a base plate and four screws.
- **Step 2** Install a base plate into one of the recessed areas where the leg rails meet the end panels as per diagram.
- **Step 3** Using a screwdriver install the four screws into the pre-drilled holes securing the base plate to both the end panel and leg rails.
- **Step 4** Repeat steps 2 to 4 on each of the corners.

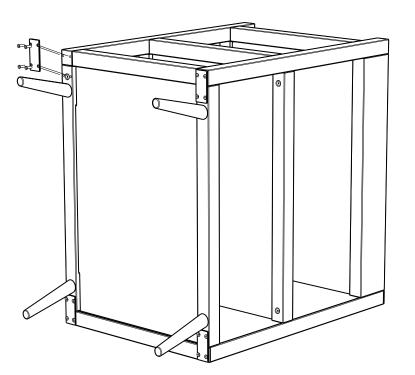



## Finished assembly

- **Step 1** Check all Locking cams and screws for tension, adjust if required.
- **Step 2** Using two adults, carefully position the change table onto the legs.
- **Step 3** Clean all surfaces prior to use.



Usaly modern

P.O. Box 1149 Collingwood VIC 3066 Australia

Ultra safe and sustainable design