

INSTRUCTIONS

OPEN CHANNEL BATTEN

7830.236 7830.258

Please read the instructions before commencing installation and retain for future reference.

SPECIFICATIONS:

- **Fitting:** Body made in mild steel sheet
- **Fitting size:**
L.1259 x W.87 x H.38 for 4ft LED tubes
L.1559 x W.87 x H.38 for 5ft LED tubes
- **Ingress Protection:** IP20. Protection against the entry of solid bodies with dimensions >12mm
- **Quality/Corrosive rating:** Suitable for domestic and commercial indoor applications.
- **Ambient temperature range:** -10°C to +45°C.

INSTALLATION INSTRUCTIONS:

⚠ Electrical products can cause death, injury, damage to property. Installation of this product must be carried out by a qualified electrician, in accordance with SANS 10142. On completion of installation, ensure that the Certificate of Compliance is updated.



CAUTION: Risk of electric shock

PLEASE NOTE: The light source contained on this luminaire (primary supply) shall only be replaced by the manufacturer or the service agent or a similar qualified person.


Ensure mains supply is switched off.

- Remove steel board and fix the lamp holders at both sides. (Fig. 1)
- Connect the fitting to its electrical power supply in compliance with the SANS 10142 quality standard mentioned above. (Fig. 2)
- Fix the fixture onto the ceiling, put the cover plate back and attach with the plastic caps (Fig. 3)
- Insert the tubes into the lamp holders and twist. (Fig. 4)

Ensure mains supply is switched off.

WARNING:

- Ensure all items and screws are secure and fitted correctly.

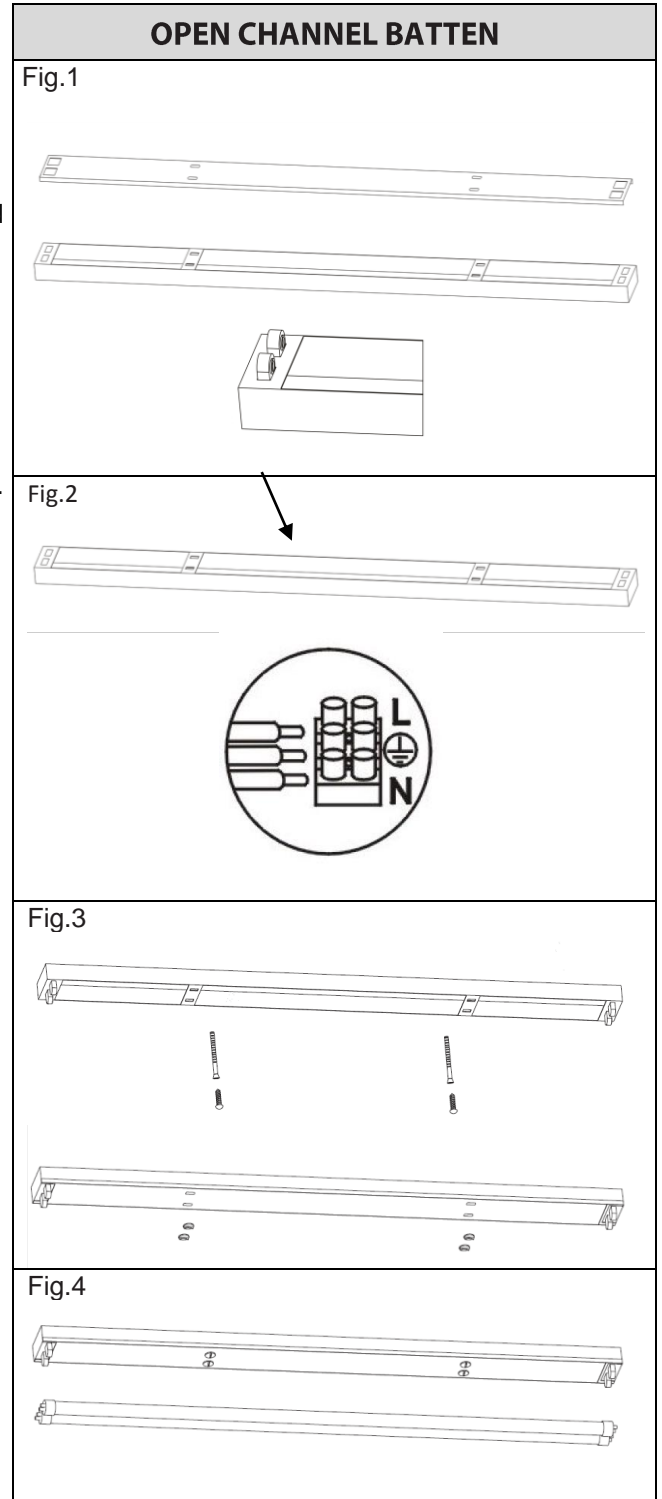

Spazio Lighting (Pty) LTD.

JOHANNESBURG OFFICE: 52 Andries Street | Wynberg/Sandton

CAPETOWN OFFICE: 36 Milner Street | Paarden Eiland

DURBAN OFFICE : 31 Solstice Road | Umhlanga Ridge

011 555 5555 (Central Switchboard) | info@spazio.co.za