MINCMONITORS Adapt-IQ 15.6" User's Manual

Model: MCT-156QDS, MCT-156QDS-POE, MCT-156HPQ, MCT-156HPQ-POE



Please keep this manual for future reference.

TABLE OF CONTENTS


PAGE

1
1
.2
.2
.2
.3
6
.9
10
11
12
12
13
17
18
19
21
22
23
26
27
28
29
29
32
33

Declaration

- Please read the instructions carefully before equipment installation and using the device.
- ✓ Do not put the product in high temperature, humid or dusty environment.
- ✓ Do not drop, crash or break down this product.
- Do not power off the device when it's formatting or upgrading, otherwise it will cause operation system error.
- ✓ This product is not waterproof.
- ✓ Use only approved add-on enhancements.

Product Instruction

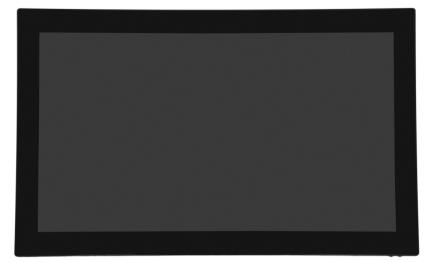

Mechanical Design

Bottom

- 1. USB x2
- 2. Thernet Ports x2 (RJ45)
- 3. Micro USB
- 4. Add on Module Slot
- 5. Optical Port
- 6. Headphone Jack
- 7. LAN (POE)
- 8. Power Switch







Back

- 4. Add on Module Slot
- 9. Volume Up/Down
- 10. Menu Navigation
- 11. Menu
- Vesa 75 Mount
 Speakers
- 13. Speal 14. GPIO

Power on the Product

Step 1 Plug the power source into the AC/DC in jack (**#8** in **Product Instruction**).

Step 2 Switch the power switch (#15) on the bottom of this product to ON.

Insert SD Card

This product supports external SD card. Please insert your SD card into the SD Card Slot (**#2** in **Product Instruction**) on the top of this product.

Insert USB Devices

This product supports USB and Micro-USB to deal with your files.

USB

Plug your USB memory into the USB port (**#10** in **Product Instruction**) on the bottom of this product, and then you can do the file operations via the File Browser. (See in **Browse Files**).

Micro-USB


Connect the Micro-USB port (**#4** in **Product Instruction**) on the bottom of this product and the USB port on your computer with a Micro-USB-to-USB cable.

Mimo Monitors info@mimomonitors.com

Click the "**Turn on USB storage**" button in the "**USB mass storage**" window that pops up automatically to make the device memory visible in your computer.


Home Screen

In the home screen, you can long-press the blank space to change the wallpaper or drag widgets to desktop.

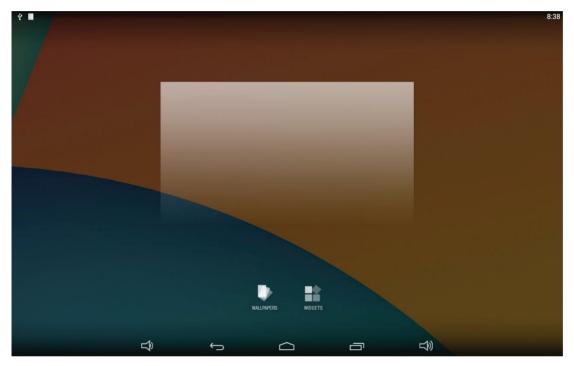

Change Wallpaper: 1. Click "WALLPAPER".



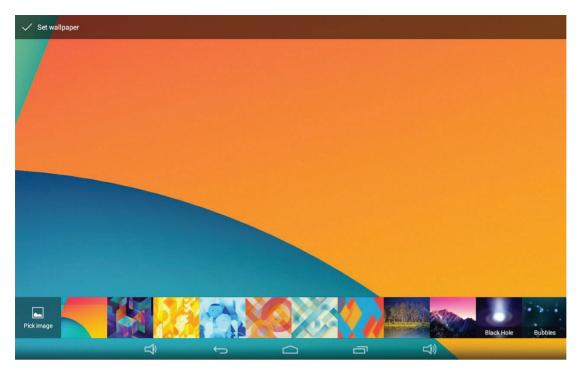

2. Select one picture from system presets or your own pictures.



3. Click "Set wallpaper" on the upper-left corner of the screen to apply the wallpaper.

Add Widgets:

1. Click "WIDGETS".






2. Long-press a widget and drag it to desktop.

¥ 🖩 🚽						8:39
			(i) App info			
		T G FRI, OC	TOBER 05	8		
	¢	<u></u>	•		0	
	Ŷ	¢		ē		

3. A dialog prompts you to allow adding a widget for the first time. Check the checkbox and then click "Create".



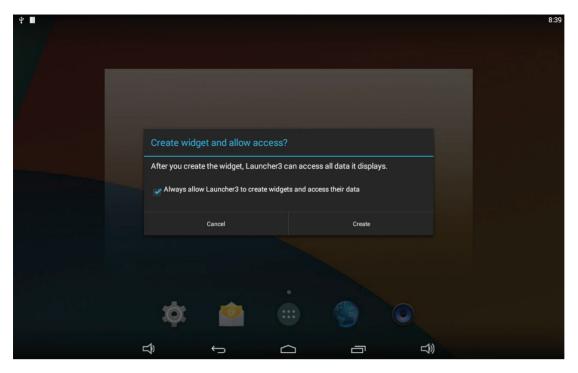

4. If you want to remove an icon, long-press the widget and drag it onto "×Remove" at the top of the screen and drop it until it turns red.



System Bar


Navigation Buttons



- **1. Volume-:** Decrease the system volume.
- 2. Back: Return to the previous page.
- **3. Home:** Return to the home screen.
- 4. Recents: Switch between recently used apps.



To remove an app from the list, you could long-press the icon to select "Remove from list".

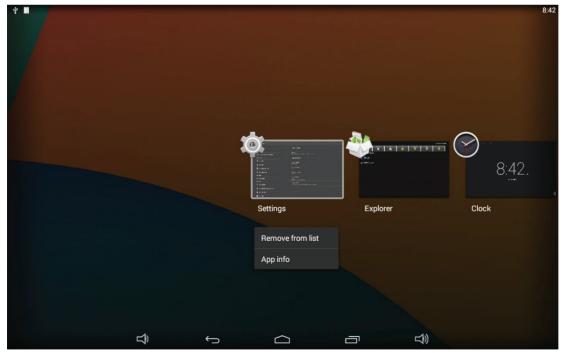

Or swipe the app item up or down to remove it.



5. Volume+: Increase the system volume.

Status Notifications



Status bar at top of the screen displays system status, such as time, Wi-Fi, SD card and USB connection etc.

Pull down the upper-left corner to open the status window.



Pull down the upper-right corner to open the shortcuts window which contains brightness adjustment, Wi-Fi, auto rotate, airplane mode and

location switch, and system settings entrance.

ድ ጠ					
			OWNER	BRIGHTNESS	SETTINGS
			WLFIOFF	EMERGENCY CALLS ONLY	AUTO ROTATE
			AIRPLANE MODE		
			-		
	¢	Ô	0	٩	
	Ŷ	¢	ā	L)	


Applications

Click e at the bottom of home screen to enter the applications page.



The installed applications will be shown here and you can open an app by clicking its icon.

To find an app easily, you can create a shortcut by long-pressing of the icon and drag it to the home screen.

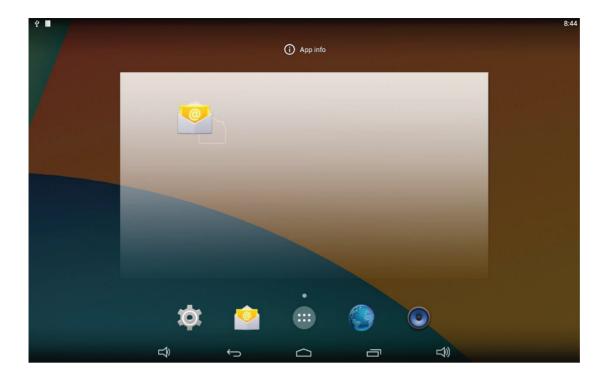

Language

In the App list, click "**Settings**" to open the system setting app, and select the option "**Language & input**".

ት III		8:46
🔯 Language & input		
ny Souna	Language	
Display	English (United States)	
Hdmi	Spell checker	<u>±</u> +
ScreenshotSetting	Personal dictionary	
Storage	KEYBOARD & INPUT METHODS	
🖄 Apps	Default	
Physical Button Manager	English (US) - Android Keyboard (AOSP)	
PERSONAL	Android Keyboard (AOSP) English (US)	<u>-1-1-</u>
♥ Location	Japanese IME	<u><u><u>u</u></u></u>
Security		
A Language & input	□ 谷歌拼音输入法	<u>1</u>
 Backup & reset 	SPEECH	
ACCOUNTS	Text-to-speech output	
+ Add account	MOUSE/TRACKPAD	
SYSTEM	Pointer speed	

Click the first option "**Language**" under "**Language & input**", and then you can change the system language according to your preference.

4 III		8:46							
📩 Language & input									
- Souna									
Display	Afrikaans								
📮 Hdmi	Azərbaycanca								
ScreenshotSetting	Bahasa Indonesia								
Storage	Bahasa Melayu								
🛃 Apps									
Physical Button Manager	Català								
PERSONAL	- ¥ 4.0								
Location	Čeština								
Security	Dansk								
A Language & input	Deutsch (Deutschland)								
• Backup & reset									
ACCOUNTS	Deutsch (Liechtenstein)								
+ Add account	Deutsch (Österreich)								
SYSTEM									
□)									

Date & Time

In the App list, click "**Settings**" to open the system setting app, and select the option "**Date & time**".

Ψ									09:10	
¢	🕻 Date & time									
	🛃 Apps			Automatic date & til Jse network-provided tim					~	
	Physical Button Manager			Automatic time zon Jse network-provided tim					×	
	Location									
	Security									
	A Language & input									
	D Backup & reset									
	ACCOUNTS		Use 24-hour format						~	
	+ Add account									
	SYSTEM			Choose date format						
	🕚 Date & time									
	O Scheduled Power ON/OFF									
	🖐 Accessibility									
	About tablet									
		ل ے	\leftarrow			Ē	り の			

If you enabled the option "Automatic date & time" under "Date & time", system date and time will be synchronized automatically with network time when you connected a Wi-Fi network.

If you want to set the time manually, you need to disable "Automatic date & time" and "Automatic time zone".

中 III					09:11			
Date & time								
🛃 Apps		Automatic date & time Use network-provided time						
Physical Button Manager PERSONAL		Automatic time zone Use network-provided time zon	e					
Location		Set date 12/8/2015						
Security		Set time						
A Language & input		09:11						
D Backup & reset		Select time zone GMT+08:00, Taipei Standard Time						
ACCOUNTS		Use 24-hour format						
+ Add account		Choose date format						
SYSTEM		12/31/2015						
() Date & time								
O Scheduled Power ON/OFF								
🖐 Accessibility								
About tablet								
L D	Ç			L)				

In this option, you can also set time zone, time notation and date format.

Volume

On the system bar, click the **Volume-** icon to decrease the system volume, and click the **Volume+** icon to increase the system volume. Or you can press the function keys (**#7** in **Product Instruction**) at the lower-right corner on the back of the product to adjust the volume.


Brightness

Pull down the upper-right corner of the screen to open the shortcuts window, and then click "Brightness".





Slide the brightness button to adjust the brightness of the screen, or turn on **Auto** switch to automatically adjust the display's brightness to the appropriate level for the current ambient light.



Scheduled Power On/Off

This function is used to power the device on and off automatically at the set time.

In the App list, click "Settings" to open the system setting app, and select the option "Scheduled Power ON/OFF".



Ý III						09:14
Scheduled Power ON/OFF						
🖄 Apps		Set S	cheduled Power On/0	Off Clocks		
Physical Button Manager						
PERSONAL						
Cocation						
Security						
A Language & input						
D Backup & reset						
ACCOUNTS						
+ Add account						
SYSTEM						
① Date & time						
C Scheduled Power ON/OFF						
🖐 Accessibility						
① About tablet						
	Ŷ	\leftarrow	\Box		L]≫	

Click the single option "Set Scheduled Power On/Off Clocks".

						(lt-	8:49
cheduled Power ON/OF	F						
00:00							
00:00							
	4						
	Ĵ	Ú	\Box) S		
	00:00		00:00	00:00		00:00	<pre>sheduled Power ON/OFF</pre>

The top row is for power on clocks, and the following row is for power off clocks. Click the top row to enter the settings of power on clocks.



4 Ⅲ							(t)-	8:49
Ø	Set Power On Clock						REVERT	DONE
	Time 00:00							
	Repeat Never							
		Ŷ	(\Box	Ē	گ		

Click the option "**Time**" to set the power on time of this device.

ቁ III							8:50
Set Power On Clock							DONE
Repeat Never							
	Set time						
		7	59				
		8 :	00	АМ			
				PM			
			Done				
	Ĵ Ĵ		\Box		گ		

Click the option "**Repeat**" to select the days which will power on this device at the set time.



♀ ■ 文 Set Power On Clock					ç	8:51 DONE
Time 08:00						
Repeat Never	Repeat					
	Monday					
	Tuesday					
	Wednesday					
	Thursday					
	Friday					
	Saturday					
	Sunday					
		Cancel	ок			
	Ê	\leftarrow	Ē	L)		

After setting, click "**Done**" at the upper-right corner of the screen to save them.

ት መ					8:51
Set Power On Clock				REVERT	DONE
Time 08:00					
Repeat Mon, Tue, Wed, Thu, Fri					
		Ē	L)		

You will see the power on option checked after saving the settings.



÷ II						8:52
Sch	neduled Power ON/OFF					
ON	08:00 Mon, Tue, Wed, Thu, Fri					
OFF	00:00					
		Ŷ	Ĵ	\Box		

For power off clocks, you can set them as same as power on clocks.

¥ 🔳						8:52
to so	heduled Power ON/OFF					
ON	08:00 Mon, Tue, Wed, Thu, Fri					
OFF	21:00 Mon, Tue, Wed, Thu, Fri					
		Ĵ	Ś	Ē		

After the settings, the device will be powered off at set time, and powered on again when achieves the appointed time.

Wi-Fi

In the App list, click "**Settings**" to open the system setting app, and select the option "**Wi-Fi**".

÷ 🔳								(îı	8:19
-	, Wi-Fi						()	+	:
	WIRELESS & NETWORKS	И	Leo-Giga Connected					7	
	Bluetooth OFF		MiniRou Secured wi	ter th WPA/WPA2 (WPS availa	ible)			R	
	🕚 Data usage		OpenWrl Secured wi	t-vpn th WPA2				T	
	More								
	€ Sound								
	Display								
	📮 Hdmi								
	ScreenshotSetting								
	Storage								
	🛃 Аррз								
	Physical Button Manager								
	PERSONAL								
	Location								
		ţ		\Box	Ū	L			

Switch the Wi-Fi button to **ON**. The product will scan available wireless networks automatically. Select a network under Wi-Fi networks and input the password to connect.

Ethernet

In the App list, click "**Settings**" to open the system setting app, select the option "**More**", and then select "**Ethernet**" at the right side.

4 m		09:16
🔯 Wireless & networks		
WIRELESS & NETWORKS	Airplana mada	
🗢 Wi-Fi OFF	- Airplane mode	
Bluetooth OFF	NFC Allow data exchange when the tablet touches another device	
🔇 Data usage	Android Beam Unavailable because NFC is turned off	
More	Tatharing 9 particula batanat	
DEVICE	Tethering & portable hotspot	
🙌 Sound	VPN	
Display	Ethernet	
🔲 Hdmi		
ScreenshotSetting	Mobile networks	
Storage		
🖄 Apps		
Physical Button Manager		
PERSONAL		
	т с с с	

Check "Use Ethernet" and plug the Internet cable into the Ethernet port (#14

in **Product Instruction**). If Wi-Fi is on, please turn off Wi-Fi to allow Ethernet working.

ћ III				🖓 09:21
🔯 Wireless & networks				
WIRELESS & NETWORKS	Use Conn	Ethernet ected		4
Bluetooth OFF		ddress 68.13.124		
O Data usage		Caddress ht5:bd:b0:23		
More	Stat	ic IP Setttings		
DEVICE		2		
🙌 Sound				
Display				
Hdmi				
ScreenshotSetting				
E Storage				
🖄 Apps				
Physical Button Manager Personal				
	Ś	\bigcirc	₽	

If you are Static IP user, please set the configurations manually.

Bluetooth

In the App list, click "Settings" to open the system setting app, and select the option "Bluetooth".

Ψ					23:35
¢	Bluetooth		SEARCH FOR DE	VICES	:
	WIRELESS & NETWORKS] 15N		
	🗢 Wi-Fi OFF		Not visible to other Bluetooth devices		
	Bluetooth ON				
	O Data usage	-	, HUULU2		
	More				
	DEVICE				
	🙌 Sound				
	Display				
	🔲 Hdmi				
	ScreenshotSetting				
	Storage				
	Apps				
	Physical Button Manager				
	PERSONAL				
	L 少	¢			

Switch the Bluetooth button to **ON**. The product will scan ambient available Bluetooth devices automatically.

If you want to pair another Bluetooth device, select it from the "Available

Devices" list, and then click "Pair" in the pop-up window. At the same time, click "Pair" in the pop-up window of the Bluetooth device to be paired.

ψ						60	23:35
¢	Bluetooth						
	WIRELESS & NETWORKS WI-Fi Bluetooth Data usage More	AVAILABLE DEVICES Bluetooth pairing request					
	DEVICE	To pair with: H60-L02 Make sure it is showing this passkey: 492173					
	ScreenshotSetting	Cancel		Pair			
	🖀 Storage						
	 Apps Physical Button Manager 						
			\bigcirc	-	⊥ ≫		

After pairing, the paired device will be moved to the "Paired Devices" list.

ψ				8	23:36
¢	🕻 Bluetooth		2	EARCH FOR DEVICES	:
	WIRELESS & NETWORKS		15N		
	🗢 Wi-Fi OFF	DUDE	Only visible to paired devices D DEVICES		
	8 Bluetooth		H60-L02	幸	
	O Data usage	~	nocluz	-i-	
	More				
	DEVICE				
	🙌 Sound				
	O Display				
	🔲 Hdmi				
	ScreenshotSetting				
	Storage				
	🛃 Apps				
	Physical Button Manager				
	PERSONAL				
		¢			

If you want to be paired by another Bluetooth device passively, click the Bluetooth name at the top. When the summary will changed to "Visible to all nearby Bluetooth devices (Visibility timeout)", this Bluetooth name can be scanned by other Bluetooth devices until the countdown to the end.



· 박 III			\$	23:38
Dluetooth			SEARCH FOR DEVICES	
WIRELESS & NETWORKS		L 15N Visible to all nearby Bluetooth devices (1:55) ED DEVICES		
Bluetooth ON	ر	, H60-L02	<u>+</u> +	
O Data usage More				
DEVICE				
🕼 Sound				
Display				
Hdmi				
ScreenshotSetting				
E Storage				
Apps				
Physical Button Manager Personal				
Ŷ	Ĵ			

The Bluetooth name and visibility timeout can be changed in the menu.

Ψ							8	23:39
¢	Bluetooth						SEARCH FOR DEVICES	:
	WIRELESS & NETWORKS			15N			Rename tablet	
	🕏 Wi-Fi 🛛 🛛	FF	-	Visible to all nearby Bluetooth devices (1	:06)		Visibility timeout	
	Bluetooth	ON	PAIRED	DEVICES				
			<u></u>	H60-L02			Show received fil	es
	🕓 Data usage							
	More							
	DEVICE							
	🜗 Sound							
	Display							
	🗖 Hdmi							
	ScreenshotSetting							
	🚍 Storage							
	🖄 Apps							
	Physical Button Manager							
	PERSONAL							
		LĴ)	¢		ā	L)		

Virtual Keyboard

The device provides a virtual keyboard for typing. You can use it as a real one.

When you click in a text input box, the virtual keyboard will appear at the bottom of the screen.

To collapse the virtual keyboard, you can click the icon 🔛 in the system bar.

👓 ዊ 🔳		9:12
about:blank $ imes$	+	:
\leftarrow \rightarrow C \triangleleft about:	Diank	8



Switch Input Methods

In any text input box, pull down the upper-left corner of the screen to see the status window, and click "**Choose input method**".

abc 9:12	2 SAT, JANUARY 1									:
←	Choose input met English (US) - Android	hod Keyboard (AOSP)								X
ψ	USB connected Touch to copy files to/f	rom your computer.								
	USB debugging co Touch to disable USB d	onnected lebugging.								
		_	_							
q	W		r 4	t	y	u		9 0	p	* X
	a s	d	f	g	h	j	k	I		Go
¢	z	x	с	v	b	n	m		?	ۍ
?123		1								.com
		Ĵ	\rightarrow		\Box	Ū	I	T)		

Select an input method from the pop window.

ᅷ Ⅲ about:blank	>	< \ +									⊡ 09:35
$\leftarrow \rightarrow$	C 🤉 abou										8
			Choose	input methoc							
			Hardware Physical keyb	oard				ON			
			English (US Android Keyb	S) oard (AOSP)							
q			Japanese Japanese IME						9	р	×
					Set up	input methods					
			d	f	g	h		k			Go
쇼	z	2	ĸ	с		b	n	m			¢
?123			:								.com
			Ŷ	\rightarrow			Ū	り し う			

If the keyboard icon is invisible, please check whether the installed input method is selected in the "Language & input" option under the system setting app.


ዊ III		09:32
Language & input		
🖄 Apps	Language English (United States)	
Physical Button Manager	Spell checker	**
PERSONAL		
Cocation	Personal dictionary	
Security	KEYBOARD & INPUT METHODS	
A Language & input	Default English (US) - Android Keyboard (AOSP)	
D Backup & reset	Android Keyboard (AOSP)	- <u>1</u> - - <u>1-</u>
ACCOUNTS	English (US)	
+ Add account	Japanese IME Japanese	<u>±</u> + ±+
SYSTEM		
① Date & time	□ 谷歌拼音输入法	
O Scheduled Power ON/OFF	PHYSICAL KEYBOARD	
🖐 Accessibility	qwerty Default	
① About tablet	Auto-replace Correct mistyped words	
り		

Take Photos & Shots


Front 5M pixels camera is an optional accessory.

In the App list, open "Camera" 💽.

Click the capture button **o** to take a photo.

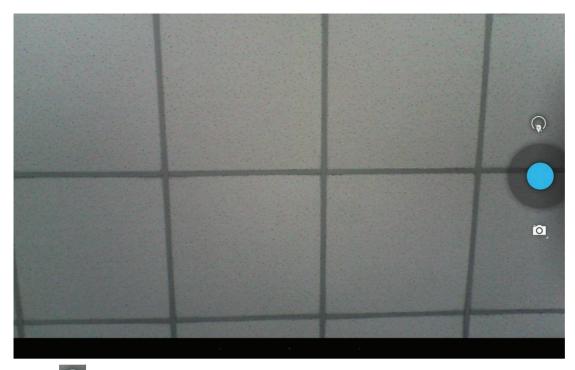




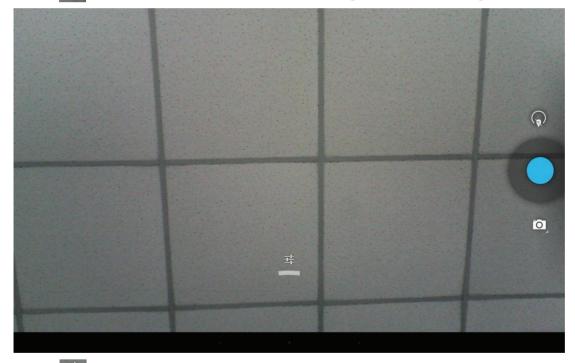

Click to open detail settings. From left to right in the picture are: location on/off, countdown timer, picture size, white balance, and scene mode.



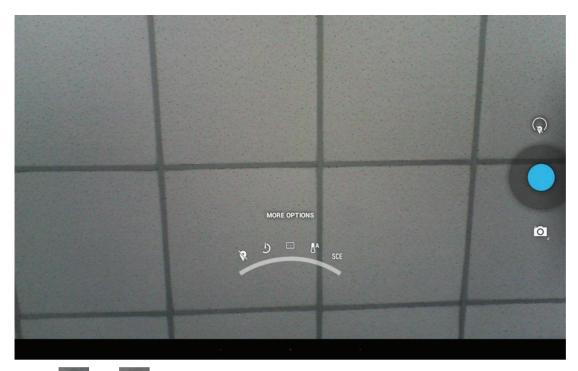


Click or under the capture button to switch take photos or videos.




Click the capture button **(**) to shooting a video.



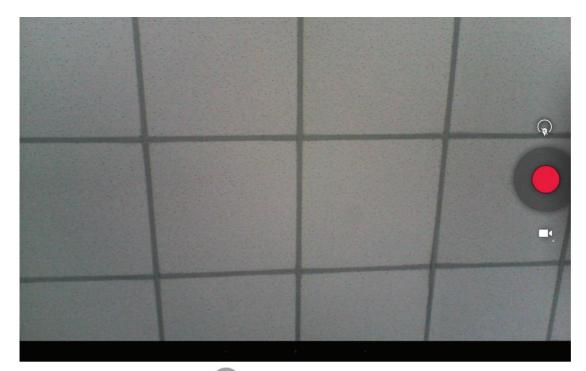

Click the capture button **o** to stop the shot.

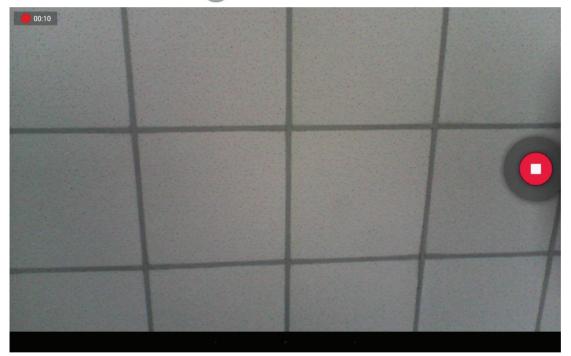

Surf Online

In the App list, open "Browser"



When connecting the device to a network, you can visit websites, play online media or download files via the browser.

In a browser window, enter in a URL in the address bar and click "Go" in the

virtual keyboard to go. You can also click 🛨 to add new tabs to make multiple tabs opened simultaneously.


∛ Ⅲ		? 9:41
Yahoo	× +	:
$\leftarrow \rightarrow$	C 🔟 🔒 https://www.yahoo.com/	☆ Q 🕱
=	YAHOO!	≥ •••
Search		Q
Are you ad quiz	dicted to your phone? Take the	1 of 85
	The most hilarious revelation about the Ashley Madison hack yet BGR News	~
8	Chelsea Handler Ditches Underwear, Covers Up With an Apple in Strange Selfie: Picture Us Weekly	~
	Chinese 'Unicorn Woman' Grows Gigantic Horn In Middle Of Her Head Lee Moran	~
- 5	Miley Makes Kimmel Blush Access Hollywood	

Browse Files

In the App list, open "**Explorer**" **W** to view local files.

■ SD card						MANAGE APPLICATIONS
Home	LevelUp	Multi	Editor	NewFolder	Back	Next
J.LOST.DIR						2015-01-07 04:25:44 drw
🧊 apk						2015-01-24 13:36:32 drw
<pre>cloudplayer</pre> <pre>1</pre> <pre>1</pre> <pre>content</pre>						2015-03-18 12:43:22 drw
Documents						2015-01-07 12:24:42 drw
FOUND.000						2015-02-13 17:55:32 drw 2015-03-18 12:36:18 drw
📁 LoadTest						2013-01-30 14:18:58 drw
LOST.DIR						2015-01-12 17:26:40 drw
Screenshots						2000-01-01 09:21:28 drw
	Ĵ	¢			L)	

Long-press a file or folder to do file operations, such as copy, delete, move (cut), paste, rename, send (share) and create shortcut.

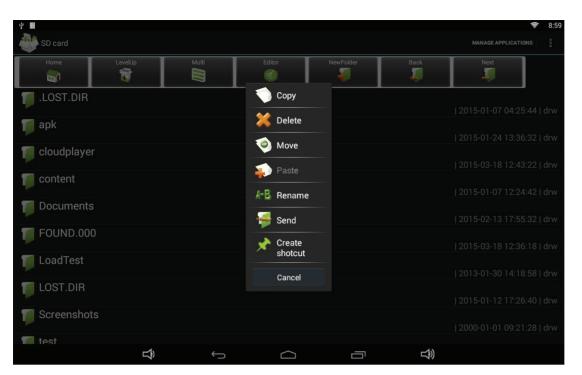

If you want to select several files/folders at once, click "Muti" in the menu, and then select files/folders. The selected files/folders will be highlighted in blue.

¥ III						8:5
🔮 SD card						MANAGE APPLICATIONS
Home	LevelUp	Multi	Editor	NewFolder	Back	Next
JLOST.DIR						2015-01-07 04:25:44 drw
🧊 apk						2015-01-24 13:36:32 drw
Cloudplayer						2015-03-18 12:43:22 drw
Content						2000-01-01 09:34:24 drw
Documents						2015-02-13 17:55:32 drw
7 FOUND.000)					2015-03-18 12:36:18 drw
🔰 LoadTest						2013-01-30 14:18:58 drw
🔰 LOST.DIR						2015-01-12 17:26:40 drw
Screenshot	S					2000-01-01 09:21:28 drw
📹 test						
	Ê	\rightarrow) S	

Click "Editor" in the menu to operate the selected files/folders.

Play Media

With the provided apps, you can play your media files on your storage, such

as pictures, music and videos.



Picture Player: Support JPG, BMP, GIF, JPEG, PNG.



Music Player: Support MP1, MP2, WMA, WAV, AAC, OGG, APE, FLAC.



Video Player: Support MKV, TS, FLV, AVI, VOB, MPG, DAT, ASF, RM, MOV, 3GP, MP4, WMV.

Install & Uninstall Apps

Install Apps

Before installing an app, please download the app (.apk) to via the browser, or copy a downloaded app to the device from your computer.

Then you can open "**ApkInstaller**" in the App list to install the downloaded app.

Click "Install" button.

Ŷ						(î)	9:00
6	ApkInstaller						
				Install			
			N	/ lanage			
			_	Exit			
		Σĵ)	\leftarrow	\bigcirc	1		

Choose the installation file's location.




¥ 🔳							╤ 9:00
	Install						
	Internal Memory				There is no apk file under t	his directory	
50	TF Card						
Ş	USB Memory						
		Ĵ	\bigcirc	\Box	Ū	」 》	

The apk files will be automatically scanned in the right side list.

₽ 🖩				ş 9:0
	Install			
Path:				
			Directory:	TF Card
			T	CloudPlayer_v0.8.0.apk
	Documents		T	R4050_V1.3.1.apk
	Work Files		T	Wi-Catch-V1.2.apk
	videonpix		T	Google_Input_3.1.0.58073826.apk
	USB-Burning-tool-v1.6.22			
	TESTMV			
	apk			
	LoadTest			
	Screenshots			
	test			
	content			
	Ŷ	Ś		Lý)

Click the apk you want to install.



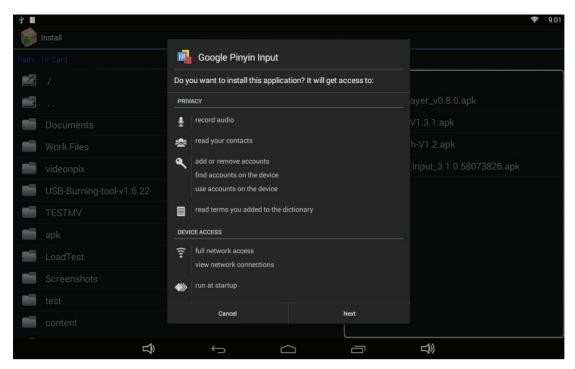

Click "Install" or "Next" until it turns to "Install", and then waiting for installation finished.

÷ 🔳				9:10
Path:		🕮 Google Pinyin Input		
		✓ App installed.		
				ayer_v0.8.0.apk
				V1.3.1.apk
				h-V1.2.apk
				Input_3.1.0.58073826.apk
		Done	Open	
_	Ŷ	~~ C		

You can also download an android app market, and install the apps via the market.

If "Install blocked" is prompted when installing an app, please open "Settings" and select the option "Security", allow "Unknown sources" and then back to reinstall the app.



ψI									9:28
Ŕ	Security								
	Physical Button Manager		SCREEN	SECURITY					
	PERSONAL			Screen lock					
	Cocation			None					
	A Security			Owner info					
	🛕 Language & input		ENCRYP						
	D Backup & reset			Encrypt tablet Require a numeric PIN or	password to	decrypt your tal	blet each time	you power it on	
	ACCOUNTS		PASSWO	RDS					
	+ Add account			Make passwords vis	sible				
	SYSTEM			ADMINISTRATION					
	① Date & time			Device administrato	rs				
	C Scheduled Power ON/OFF			View or deactivate device	administrator				
	🖐 Accessibility			Unknown sources Allow installation of apps	from unknow	n sources			
				Verify apps					
				Disallow or warn before in	istallation of a	apps that may c	cause harm		
	{ } Developer options	_	CREDEN	TIAL STORAGE					
	① About tablet			Storage type Hardware-backed					
	以	Ļ				Ū	ſ	t))	

Uninstall Apps

To uninstall an app, please open "**Settings**" in the App list and select the option "**Apps**". In this option, you will see the installed apps list.

Ψ				9:10
¢	🕻 Apps			:
	ScreenshotSetting		DOWNLOADED	ON SD CARD
	🗮 Storage	拼 Google Pir	nyin Input	
	🛃 Apps			
	Physical Button Manager			
	PERSONAL			
	Cocation			
	Security			
	A Language & input			
	D Backup & reset			
	ACCOUNTS			
	+ Add account			
	SYSTEM			
	① Date & time			
	C Scheduled Power ON/OFF			
	Accessibility	115MB used	Internal storage	889MB free
		¢		

Click the app you want to remove to enter the detail page.



ቂ መ		9:10					
🄯 Apps							
ScreenshotSetting	Google Pinyin Input						
Storage	version 3.1.0.58073826						
🛃 Apps	Force stop	Uninstall					
	Show notifications						
Physical Button Manager	Physical Button Manager STORAGE						
PERSONAL	Total	23.27MB					
Cocation	Арр	23.27MB					
A Coourity	USB storage app	0.00B					
Security	Data	0.00B					
🛕 Language & input	SD card	0.00B					
D Backup & reset		Clear data					
ACCOUNTS	CACHE						
+ Add account	Cache	0.00B					
SYSTEM							
① Date & time	LAUNCH BY DEFAULT						
Scheduled Power ON/OFF	No defaults set.						
		Clear defaults					
🖐 Accessibility	PERMISSIONS						

Click the "**Uninstall**" button and select "OK", and then waiting for uninstallation finished.

-				
· ቍ 🛄		9:10		
Apps				
ScreenshotSetting	Google Pinyin Input			
Storage	version 3.1.0.58073826	an 8 - 40		
🛃 Apps		Uninstall		
Physical Button Manager				
	Total	23.27MB		
Cocation	📕 Google Pinyin Input	23.27MB		
Security		0.00B 0.00B		
🔺 Language & input	Do you want to uninstall this app?	0.00B		
D Backup & reset	Cancel OK	Clearidata		
+ Add account		0.00B		
		Clear cache		
③ Date & time				
C Scheduled Power ON/OFF		Clear defaults		
🖐 Accessibility	PERMISSIONS			

Reset to Factory Default

Please make sure to back up the important data before resetting the device. In the App list, click "**Settings**" to open the system setting app, and

select the option "Backup & reset".

Ψ						D 09:37
¢	Backup & reset					
	🖄 Apps	PERSONAL DATA				
	Physical Button Manager	Fact	s all data on tablet			
	PERSONAL					
	Cocation					
	Security					
	A Language & input					
	Backup & reset					
	ACCOUNTS					
	+ Add account					
	SYSTEM					
	① Date & time					
	C Scheduled Power ON/OFF					
	🖐 Accessibility					
	About tablet					
	Σ ₂	¢			L	

Click "Factory data reset".

ት 🔳						ß	09:38
Ф в	ackup & reset						
<u>.</u>	Apps	This will erase	all data from your ta	blet's internal storage ,	including:		
P	Physical Button Manager	 Your Google account System and app data and settings Downloaded apps 					
PEF	RSONAL						
Ŷ	Location	To clear music	clear music, pictures, and other user data, the SD card needs to be erased.				
	Security	Erase SD card					
<u>A</u>	Language & input	Erase all the	e data on the SD card, such				
Ð	Backup & reset						
ACC	COUNTS						
+	Add account						
SYS	STEM						
0	Date & time						
Ф	Scheduled Power ON/OFF						
*	Accessibility			Reset tablet			
0	About tablet						
	Ĵ	Ĵ	\Box		LT) ≫		

Click "Reset tablet" button.



ቁ መ				C C	09:38
Dackup & reset					
🛃 Apps	Erase all you	r personal informatio	n and downloaded	apps? You can't reverse this action!	
Physical Button Manager					
PERSONAL	Erase everything				
Cocation					
Security					
A Language & input					
D Backup & reset					
ACCOUNTS					
+ Add account					
SYSTEM					
① Date & time					
C Scheduled Power ON/OFF					
🖐 Accessibility					
① About tablet					
ц С	\leftarrow		Ē	\$ ↓	

Click "Erase everything" button, and then waiting system reboots and resets to factory default.

