

# Wi-Fi+BLE

## Dream Colour String Lights



G.W.S. LED

53 Summer Lane, B19 3TH


# Features

- Support Wi-Fi + Ble to connect via Smart Life App on your phone, physical remote also available.
- It can react to sound and change with the rhythm of the music.
- Dream colour String Lights effects include RGB chasing for a beautiful decorative show.
- It is used in a variety of scenes, cabinet, patio, birthday, party, Christmas tree, and other holiday decorations.

# Parameters

Colour	Voltage	Current
Dreamcolour	DC5V	Max.2A

# Product explanation

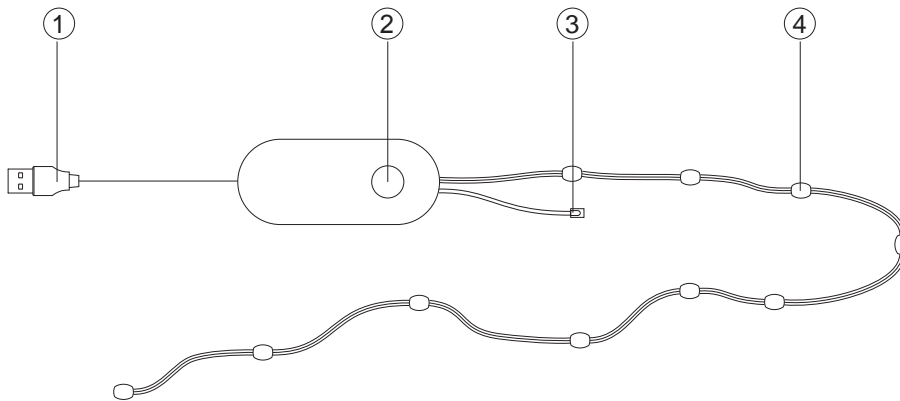

- ① USB DC5V.
- ② Reset Button: One Press to turn on the light, Double Press to turn off the light, Short press again to switch to music mode.
- ③ IR Receiver.
- ④ String Lights.

# Installation

1. Connect to a USB port.
2. After power on, the light will enter the flashing mode, if not, please press the reset button for more than 6 seconds.
3. Ensure your WIFI is 2.4GHZ, turn on Bluetooth and it will be shown on your APP interface.
4. Click and enter the password, and wait for the connection.

# Attentions


1. Do not put any metal around the controller, which could blocked WiFi signal.
2. Do not cover anything on the surface of power supply, controller and LED strip.
3. Ensure the connection is correct before powering.

## Download APP

1: Search "Smart Life" from App store or Google play.



2: Scan the QR code from the label or user manual.

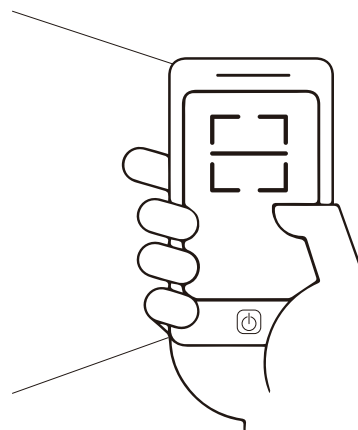

The APP is compatible with Android 5.0 and IOS 10.0 and higher version.





Android 5.0



iOS10.0


# Log in / Register account number

Open the Smart APP, sign up for a new account or log in with an existing account.

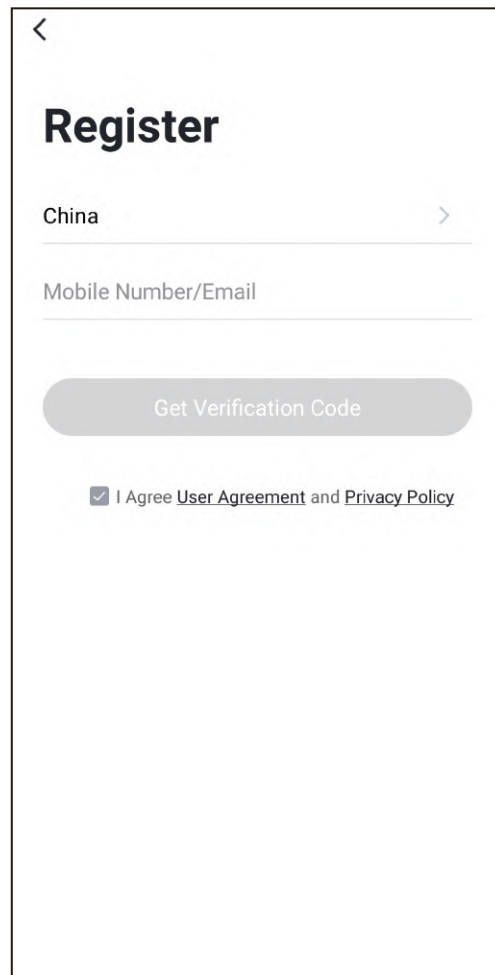
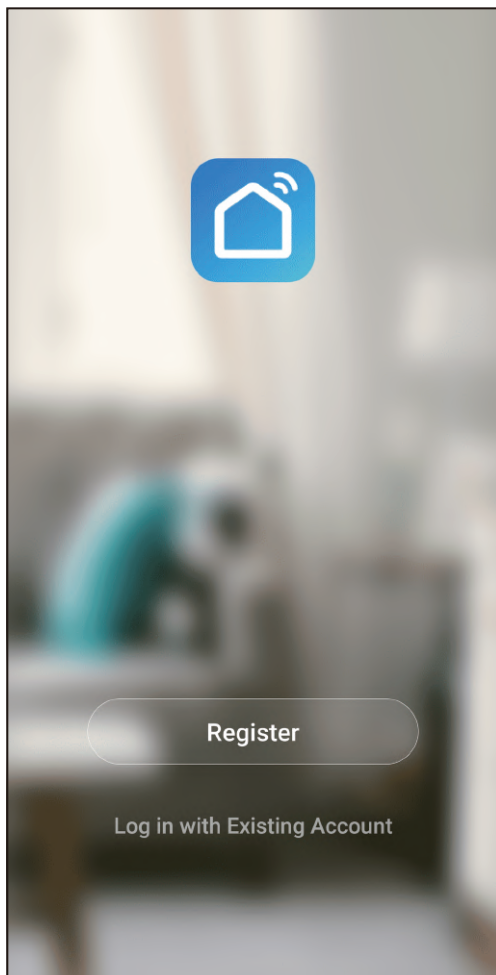


# APP connection

1. Preparation: Turn on the LED and open the APP, ensure the WIFI signal is good and stable.
2. The LED will flash when turned on. Add all devices on the APP by going to the 'adding lighting device' interface, then match the LED.

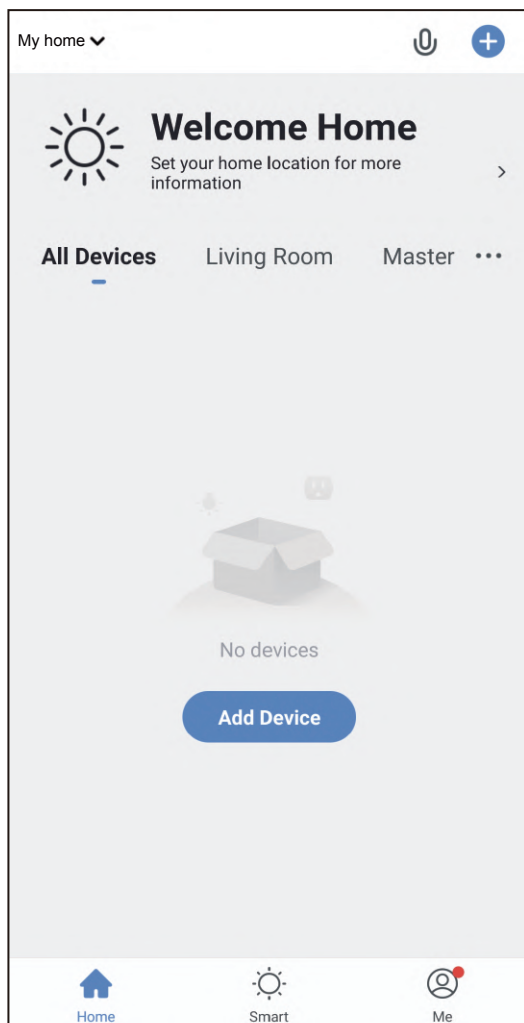


3. If the LED is not flashing when turned on, long press the Reset button for more than 5 seconds. While LED flashing, go to the APP 'adding lighting device' interface and match the LED.

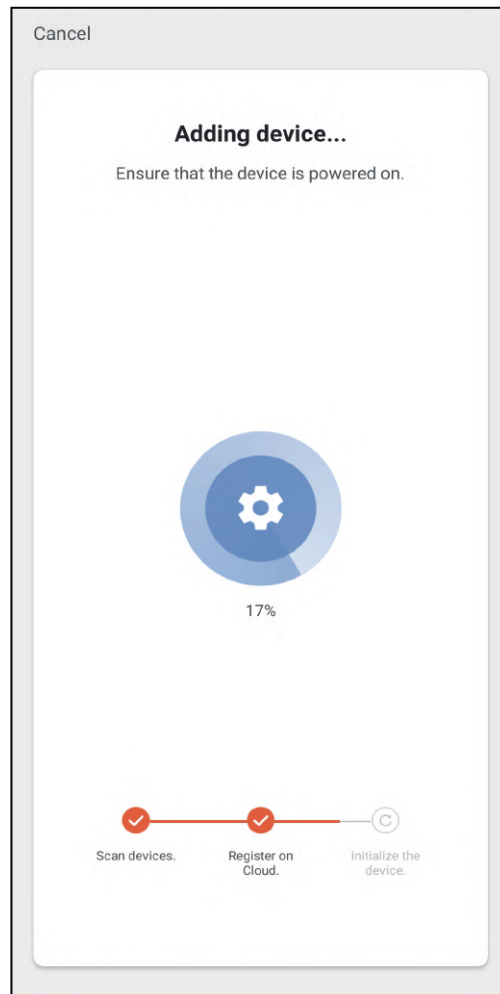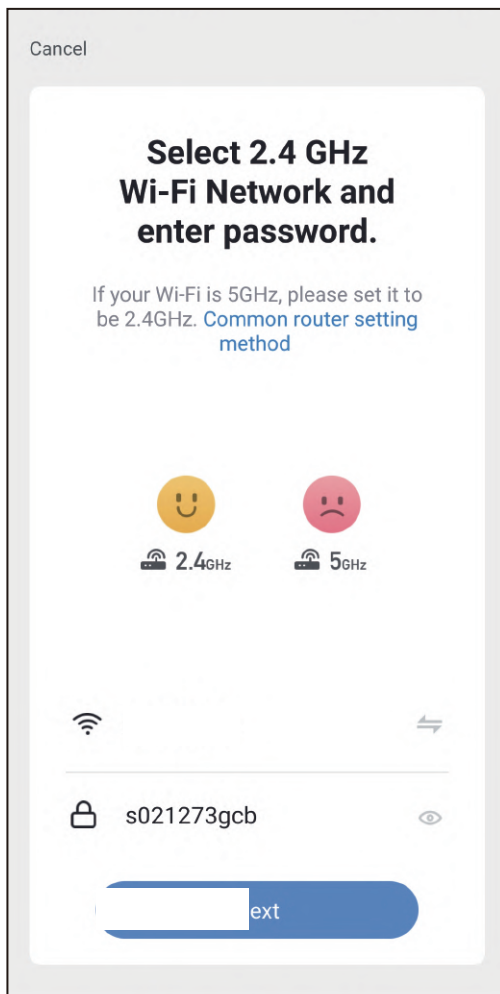


# Introduction to the interface:

The scheduled scenes of the APP function are: quiet, active and colourful (Figure 1 2 3).

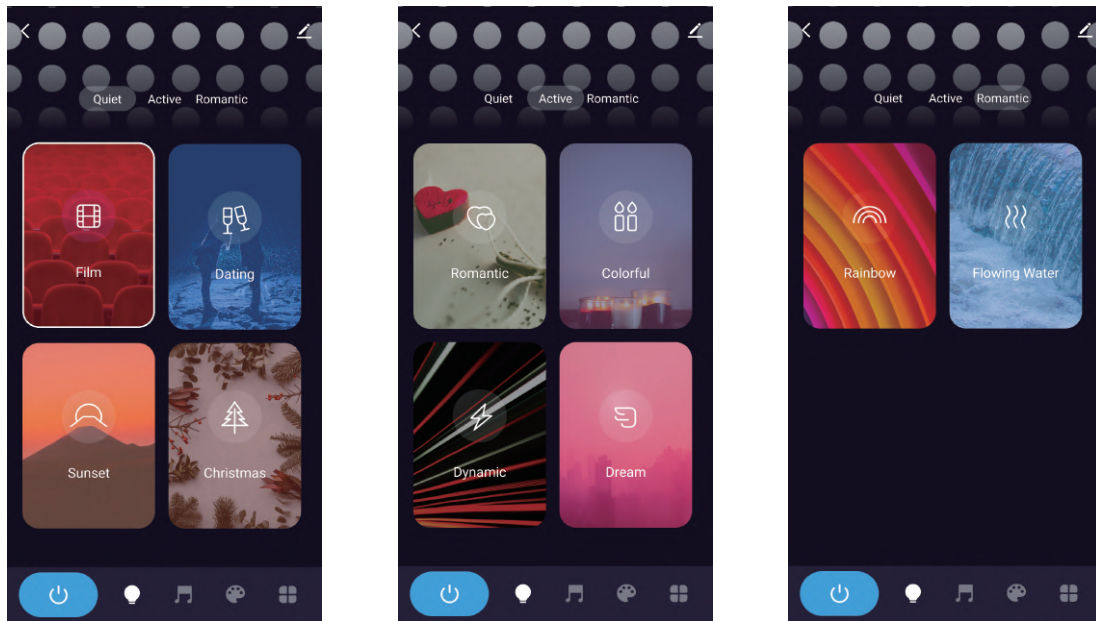

Digital music mode (Figure 4)

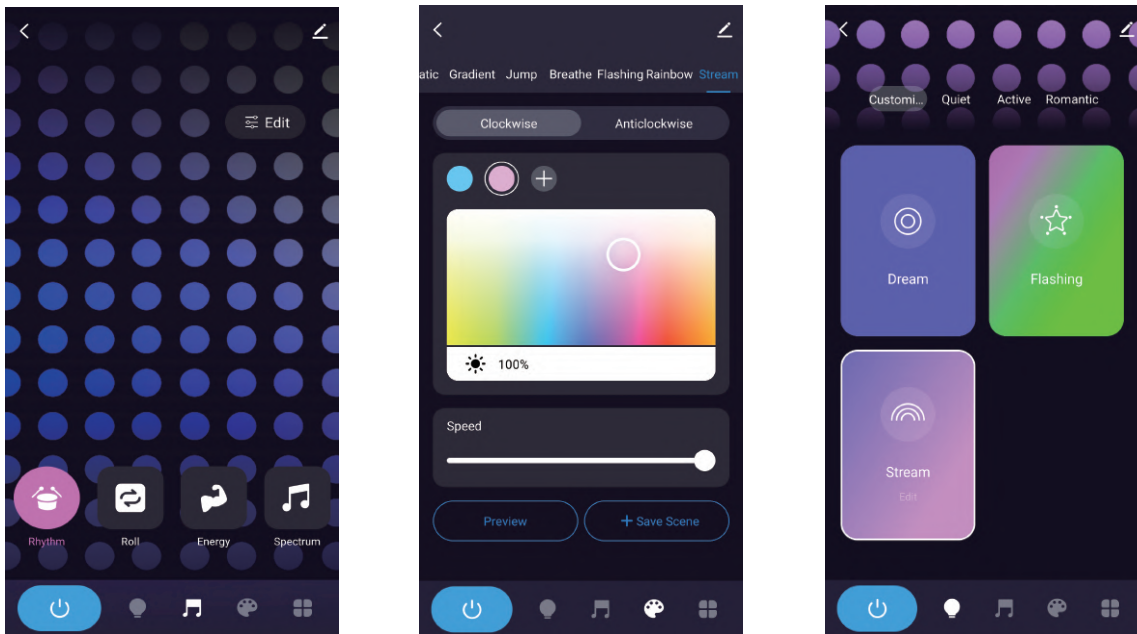

APP scene custom multiple modes (after the definition is successful, the mode will automatically appear in the scene interface) Figure 5 Figure 6

# IR Music remote controller manual


## Product introduction:

The 19 keys IR remote control include various dreamcolour modes i.e. running water and music modes etc.

## Parameters:

Power supply: 3V button cell.

Control distance: 5-8 meters in open area.

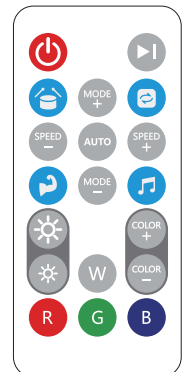

## Instructions of remote control:

Please remove the PVC insulation sheet from the end of the remote control before using.

Please set the APP internet connection as priority when the light is flashing.

Features	Action	Remote control buttons
ON/OFF	Short Press	
Pause/beat	Short Press	
Speed+/-	Short Press	
Dynamic mode switching	Short Press	
Music mode	Short Press	
Automatic mode	Short Press	
Brightness +/-	Short Press	
Static color change, adjust sensitivity for music model	Short Press	
W R G B	Short Press	