

# Rugged EcoLight™ Solar Power Bank



**20W**  
Power Delivery



Make your trips and outdoor activities power-packed with the high-capacity 10000mAh battery power bank with an integrated LED light and wireless charging. SolarTank-10PDQi sports a built-in high-grade solar panel, which lets you charge the power bank at faster speeds even when outdoors. You can also transform the power bank into a portable LED light, making it one of the most versatile power banks.



SolarTank-10PDQi



### Powerful 10000mAh Power Bank

Keep all your devices charged on the go with the highly versatile 10000mAh power bank




### 3 USB Charging Ports

Charge your USB-powered devices through the integrated USB-A and USB-C ports at faster speeds



### Emergency LED Light

The power bank sports a LED light that can easily lighten up a wide area



### High-Grade Solar Panel

Recharge the power bank with the high-efficiency solar panel that is built to last long



### 20W Power Delivery

Delivers blazing fast power to your power delivery supported devices like the iPhone & iPad Pro




### Qi Wireless Charger

Charge your Apple AirPods or wirelessly chargeable devices via the wireless charger



### Case Compatible

Charge your device case-free and with no interference

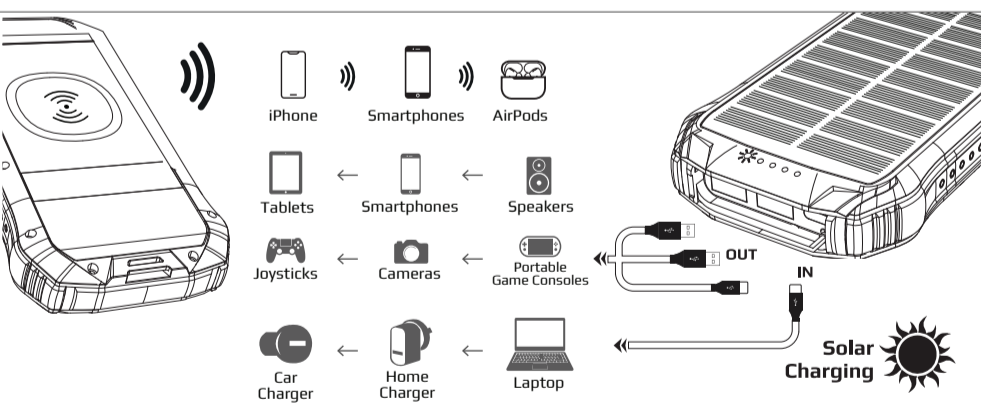

### Specifications:

**USB-C Input:**  
5V/3A, 9V/2A

**Battery Capacity:**  
10000mAh

**Battery Type:**  
Li-polymer

**LED Brightness:**  
300lm

**USB-A 1 Output:**  
5V/3A, 9V/2A,  
12V/1.5A (18W)

**USB-A 2 Output:**  
5V/2A

**Solar Panel Input:**  
5.5V/ 300mA

**USB-C:**  
5V/3A, 9V/2.22A,  
12V/1.67A(20W)

**Wireless Charging:**  
5W/7.5W/10W

**Charging Time:**  
**USB-C:** 2-3 Hours  
**Solar:** 50 Hours

**Wireless Charging Distance:**  
8mm

**Packaging Contents:** SolarTank-10PDQi, User Guide

**Certifications:** R-NZ

