

Wireless Color **Weather Station** with Barometric Pressure & Custom Temperature Alerts




Model: 308-1425Bv3
DC:072022

Full manual can be found under the Support tab here: bit.ly/308-1426bv2

POWER UP

1. Insert 2-AA batteries into your Outdoor Sensor.
2. Insert the 5.0 Volt Power Cord into an outlet, then into your Forecast Station. Optional: Install 3-AAA Batteries into your Station for backup.
3. Once the Sensor is reading to your Station, place the Sensor outside in a shaded location to protect from sun's heat.

Watch sensor mounting video: bit.ly/TH_SensorMounting

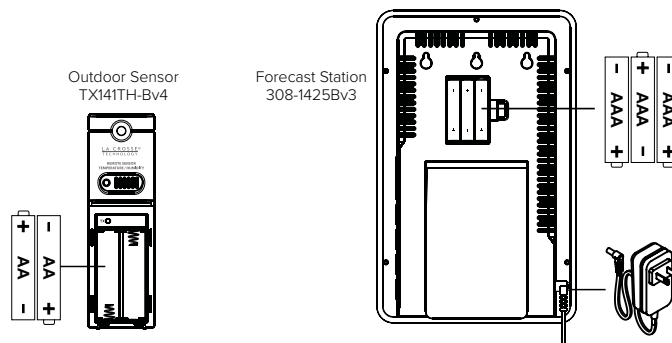

ATOMIC TIME SIGNAL-WWVB

- The station will search for WWVB Atomic Time Signal at UTC: 07:00 and if no reception, will try again at 08:00, 09:00, 10:00 and 11:00.
- Press the TIME SET button to start or stop a search for the Atomic Time Signal WWVB.
- For information about WWVB Atomic time visit: bit.ly/AtomicTime

SETTINGS

1. Hold the TIME SET button to enter the Settings Menu.
2. Use the ARROW buttons to adjust, and TIME SET to confirm.
3. Press the SNOOZE/LIGHT button at any time to exit.

Settings Menu Order:

- WWVB ON/OFF
- Time Zone
- DST ON/OFF
- 12/24 Hour
- Hour
- Minutes
- Year
- Month
- Date
- Fahrenheit/Celsius

Time Zones

AST = Atlantic
EST = Eastern
CST = Central
MST = Mountain
PST = Pacific
AKT = Alaska
HAT = Hawaii

Note: If WWVB OFF is selected, skip to 12/24 hour time.


Note: Weekday will set automatically when year, month and date are set.

24 HOUR PRESSURE HISTORY GRAPH

- The bar graph indicates your pressure history trend over the past 24 hours.
- Read the graph from left to right.
- If bars are rising, weather should improve.
- If bars are falling, weather may worsen.



BUTTON FUNCTIONS



DOWN ARROW	Press to view daily low temperatures. Hold to reset low temperature. Alert mode: Press to disarm alerts.
UP ARROW	Press to view daily high temperatures. Hold to reset high temperature. Alert mode: Press to arm alerts.
HEAT DEW	Press to view Heat Index and Dew Point Temperature. Hold to search for outdoor sensor.
TIME SET	Hold to enter the Settings Menu. Press to confirm settings in the Settings Menu. Press to start or stop Atomic Time Signal search.
SNOOZE LIGHT	Press to adjust backlight HI-LO-OFF. When alarm sounds, press to Snooze Alarm for 10 minutes.
ALERTS	Hold to enter Alert Settings. Press to toggle through alerts.
ALARM	Hold to enter Alarm Settings. Press to activate/deactivate alarm.

MOON PHASE

The moon phase is based on the lunar calendar.



SENSOR WEATHER SHIELD

- The Sensor Weather Shield is designed to protect your outdoor sensor from rain and snow.
- This shield will offer limited protection from the sun’s heat.
- Optional purchase at: bit.ly/925-1418

Sold separately



WE’RE HERE TO HELP!

If you require additional support, get in touch with our friendly customer support team based out of La Crosse, WI.

Phone: 1-608-782-1610

Online: bit.ly/contact_techsupport

Our knowledgeable customer support team is available:
Monday-Friday, 8am-6pm CST.

JOIN THE CONVERSATION

Ask questions, watch detailed setup videos, and provide feedback on our social media outlets!



SPECIFICATIONS

Indoor Temperature Range: 32°F to 122°F (0°C to 50°C)

Indoor Humidity Range: 10% to 99% RH

Outdoor Temperature Range: -40°F to 140°F (-40°C to 60°C)

Outdoor Humidity Range: 10% to 99% RH

Power Requirements:

Station: 5V Power Cord AC6: GPU280500150WAOO

Battery Backup: 3 “AAA” Batteries (sold separately)

TX141TH-Bv4 Sensor: 2 “AA” batteries Note: Batteries sold separately

The plug on the power adapter is intended to serve as the disconnect device, the socket-outlet shall be installed near the equipment and shall be easily accessible.

Dimensions:

Station: 6.16” L x 0.92” W x 9.6” H (15.64 cm L x 2.35 cm W x 24.51 cm H)

TX141TH-Bv4 Sensor: 1.57” L x 0.82” W x 5.11” H (3.98 cm L x 2.08 cm W x 12.98 cm H)

WARRANTY INFO

La Crosse Technology, Ltd. provides a **1-year limited time warranty** (from date of purchase) on this product relating to manufacturing defects in materials & workmanship.

La Crosse Technology, Ltd, 2830 S. 26th St., La Crosse, WI 54601

For Full Warranty Details, Visit: www.lacrossetechnology.com/support

CARE + MAINTENANCE

- Do not mix old and new batteries.
- Do not mix Alkaline, Lithium, standard, or rechargeable batteries.
- Always purchase the correct size and grade of battery most suitable for intended use.
- Clean the battery contacts and also those of the device prior to battery installation.
- Ensure the batteries have with correct polarity (+ / -).
- Remove batteries from equipment that will not to be used for an extended period.
- Promptly remove expired batteries.

FCC STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

CAUTION!

Any changes or modifications not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment.

All rights reserved. This manual may not be reproduced in any form, even in part, or duplicated or processed using electronic, mechanical or chemical process without the written permission of the publisher.

This booklet may contain errors or misprints. The information it contains is regularly checked and corrections are included in subsequent editions. We disclaim any responsibility for any technical error or printing error, or their consequences. All trademarks and patents are recognized.



CA WARNING: This product can expose you to chemicals including acrylonitrile, butadiene, and styrene, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to: www.P65Warnings.ca.gov