

### MAIN FEATURES

- 50W x 2CH - 4ohms / 30W x 2CH - 8ohms / full digital stereo amplifier
- Stream music through local Wi-Fi network or Bluetooth 5.0
- Spotify Connect , Airplay 1, DLNA & UPnP protocols supported
- Link multiple units together via the Hamilton Player app for multi-room streaming
- High quality music streaming support, sample rate decoding up to 24bit, 192KHz
- EQ adjustment via Hamilton Player app
- Optical audio input
- Audio output for active subwoofer
- Supports streaming sources from online services, USB, NAS, Bluetooth and line in



View online here

### WSA50+

### SPECIFICATIONS

<b>Audio Specification</b>	<b>Audio Interface</b>
Power Amplifier	1 x Line In
2 x 50W 4ohms / 2 x 30W 8ohms	1 x Sub Out
Frequency Response: 20Hz-20KHz	1 x SPDIF Optical In
	L/R Speaker Out
	1 x USB



Easily control all of your Hamilton devices via the **Hamilton Player app**



The Apple logo is a trademark of Apple Inc., registered in the U.S. and other countries. Google Play and the Google Play logo are trademarks of Google LLC.


## H600-80W8 Ceiling Speakers

### SPECIFICATIONS

- Woofers: 6 Inch Kevlar Cone
- Tweeters: 1 Inch Titanium Dome
- Magnetic Front Grill
- Power Handling: 80 Watts
- Frequency Response: 100Hz-20KHz



### INTERFACE DIAGRAM

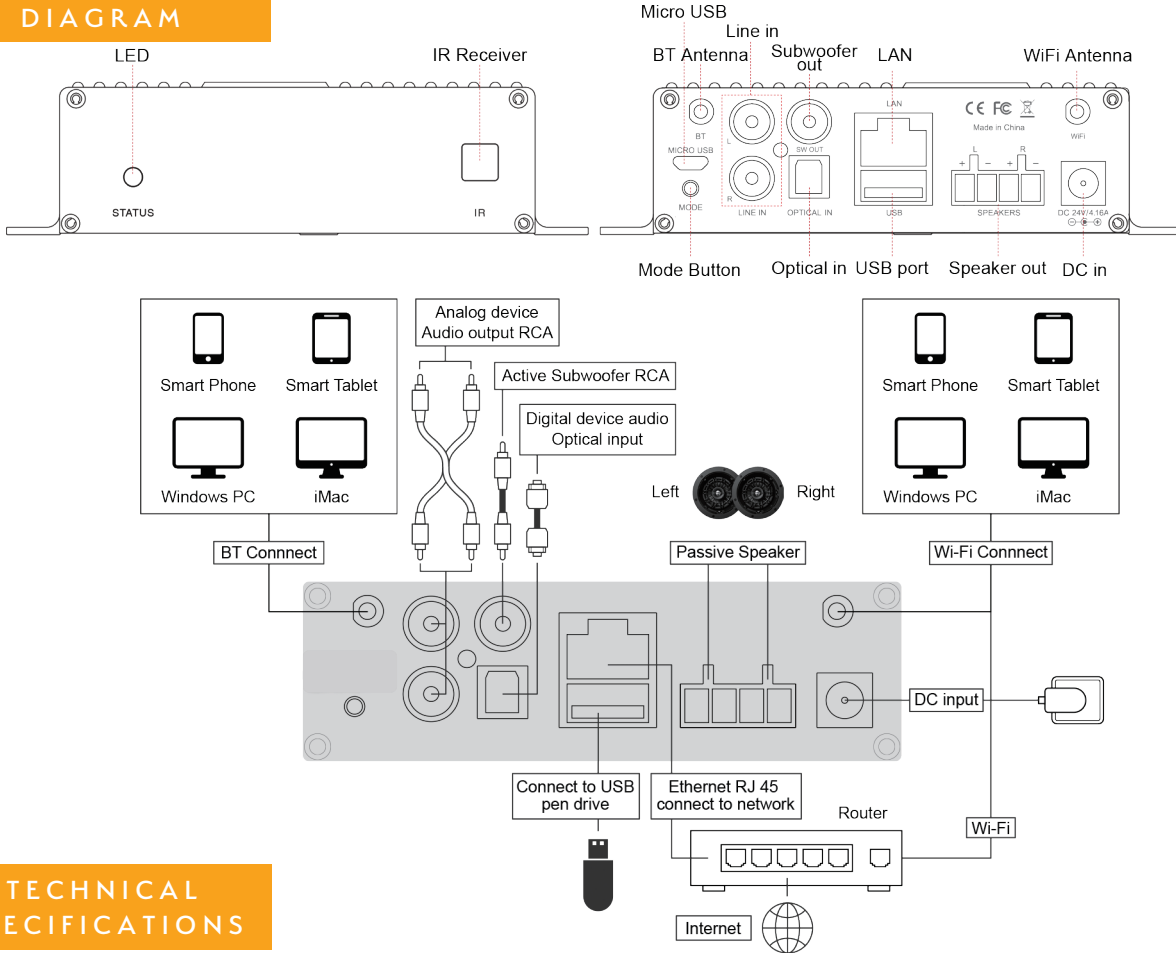

### TECHNICAL SPECIFICATIONS

#### Interfaces

DC input: 24V/4.16A  
 Audio Input:  
 - RCA for analog input  
 - Optical for digital input  
 Audio Output:  
 - Speaker out for analog output  
 - Subwoofer out for active subwoofer  
 USB host: to play USB music  
 Ethernet RJ45: for wired LAN cable.  
 LED indicators: to show the device status  
 Mode button: Short press to switch input mode, press twice to reset WiFi/BT connection, press three times to restore factory reset, Long press to turn off, press again to turn on.

#### Streaming Protocols

AirPlay, DLNA, UPnP, Spotify connect and Qplay

#### Network

Wireless connection:  
 IEEE802.11 b/g/n 2.4G  
 Bluetooth 5.0  
 Wired connection:  
 Ethernet RJ45

#### Audio Parameters

Speaker power:  
 - 24V 4ohm 50Wx2  
 - 24V 8ohm 30Wx2  
 Speaker Impedance: 4-8ohm  
 Frequency response: 20Hz-20kHz  
 THD+N: 0.03%  
 Music format:  
 FLAC/MP3/AAC/AAC+/ALAC/APE/WAV  
 Audio decode: 24bit, 192kHz

#### Music Sources

Online streaming services: Spotify, Amazon Music, Deezer, Internet Radio, QQMUSIC, Napster, Tidal, TuenIn and many more.  
 Local storage: music stored on the mobile device memory, NAS, USB pen drive  
 AUX input: RCA input  
 Digital input: SPDIF Optical input

#### Control Applications

Hamilton player app for iOS and Android based smart devices

#### General

Power input: 24V/4.16A input  
 Dimensions: 146x111x54mm  
 Weight: 0.4kg

T: +44 (0)1747 860 088 E: [uksales@hamilton-litestat.com](mailto:uksales@hamilton-litestat.com)

#### CONTACT US

#### BRISTOL HEAD OFFICE AND SHOWROOM

Unit 10, Carrick Business Centre  
 4-5 Bonville Road, Brislington,  
 Bristol, BS4 5NZ

#### LONDON OFFICE AND SHOWROOM

27 Bush Lane,  
 Cannon Pavilion,  
 London  
 EC4R 0AA.

#### FOLLOW US

