



Mounted Fish Feeder

Assembly Instructions

INSTALLING THE BATTERY & TIMER

Step 1: Remove the main feeder lid and inner canister lid.

Step 2: Unwrap the battery and timer from their protective packaging.

Step 3: There are three wires to be connected. One will go to the timer and two to the battery. (See Figure 1)

Step 4: Slide the wires onto the battery terminals matching up red to red and black to black and set the battery in the canister with the wires toward the top. (See Figure 2)

Step 5: Push the timer plug into the side of the timer and set the timer inside the canister. (See Figure 3)

Step 6: Follow the operating instructions on the back of the timer to set the clock and run times.

****We recommend 2 settings per day: 1 in the morning and 1 in the evening, with a run time of 3-4 seconds. This will feed approximately 1.5 pounds of fish food per feeding.***

Step 7: Carefully arrange the timer, battery and wires back inside the canister and replace the lid - making sure none of the terminals are touching the aluminum and you don't pinch any of the wires with the lid. (See Figure 4)

Step 8: Replace the main feeder body lid and secure using the green cable.

Step 9: Mount the feeder onto a 2" square post about 2-3' off the water using the bolts provided.



Download our Pond King app for more pond management tips and information!



**FREE IN THE
APP STORE &
GOOGLE PLAY**

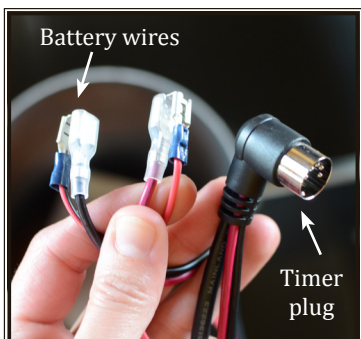


Figure 1

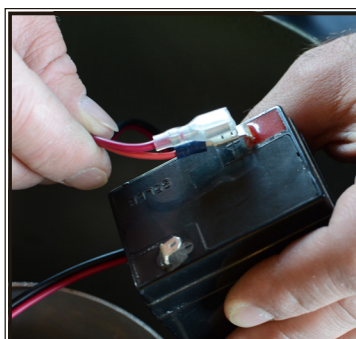


Figure 2



Figure 3



Figure 4