



POWER YOUR PEDALS



POWER-ALL[®]
ECO-DAPTER[®]

EXPANDABLE 9-VOLT DC GREEN POWER SYSTEM

SAVE THE WORLD!

OPERATING INSTRUCTION MANUAL

POWER-ALL® ECO-DAPTER®

World's first **Carbonfree®** power supply for effect pedals!

In partnership with **CarbonFund.org**, the **ECO-Dapter®**'s carbon footprint is neutralized through the purchase of carbon offsets. **CarbonFund.org**'s certified carbon reductions are third party audited to assure the highest standards and are retired rather than being re-used.

The **ECO-Dapter®** also meets the stringent **Level VI** energy efficiency standards set out by the **U.S. Department of Energy**. This means that the **ECO-Dapter®** consumes less power, conserving energy while also eliminating the waste and environmental hazards associated with disposable batteries.

In addition to **Environmentally Conscious Operation**, the **ECO-Dapter®** provides ultra-quiet, reliable, high-current power to your effects so they can operate at their peak performance levels.

— **LIFETIME WARRANTY** —

Godlyke, Inc. guarantees to replace or repair (at their option) this product should it suffer from defects in materials and/or workmanship during the life of the product.

Damage caused by accident, abuse, alteration, or misuse are not covered by this warranty. Product appearance and normal wear and tear (worn cables, scratches, etc.) are not covered under this warranty.

PLEASE REGISTER YOUR WARRANTY ONLINE AT

WWW.GODLYKE.COM/WARRANTY


OPERATING INSTRUCTIONS:

PLEASE READ CAREFULLY BEFORE OPERATION

- 1.) **Remove** the PA-9 and accessories from the packaging and check to make sure all components listed on the outside packaging of the kit are present. If any items are missing, please contact us at service@godlyke.com to arrange for a replacement.
- 2.) **Plug** the PA-9 power adapter directly into a wall-mounted power outlet. Plugging into an external power strip along with other electronic devices can cause ground loops that will generate unwanted hum and should be avoided if at all possible. If you **MUST** plug into an external power strip, make sure that your amplifier is plugged into a separate power strip and/or wall outlet to avoid ground loops.
- 3.) **Arrange** your effect units in the order that you wish to chain them together.
- 4.) **Connect** the Daisy Chain to the effects that you wish to power, and **THEN** connect the Daisy Chain to the PA-9 Power Supply. You may continue to connect multiple Daisy Chain cables to one another in order to power additional effect units until the maximum current capacity of the **POWER-ALL® ECO-DAPTER®** is reached (2000mA).



CABLE-5-LEAD RIGHT ANGLE DAISY CHAIN
INCLUDED IN PA-9ECB BASIC KIT

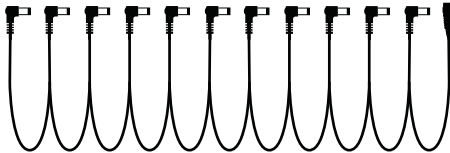

CABLE-11-LEAD RIGHT ANGLE DAISY CHAIN
INCLUDED IN PA-9ECD DELUXE KIT

WARNING: ALWAYS daisy chain your pedals DIRECTLY from the PA-9. Daisy chaining off the DC output of a pedal in your chain can cause damage to your PA-9 and will void the manufacturer's warranty.

When hooking up your various effects units, you may need to use some of the colored **Jumpers Cables** included with the kit in order to make the proper connections.

POWER-ALL CABLES feature 26-AWG, OFC copper wire with oil-resistant vinyl sheathes. Color-coded plugs allow easy identification of the cable type without compromising the visual appeal of your pedalboard layout. Please visit www.godlyke.com for more information or to purchase additional cables.



- **Cable-Black** – The C-BK/R Right-Angle Extension Cable provides an additional 10.5 inches (approx. 266mm) of length for longer power runs, oversized pedals, or hard-to-reach power jacks. The C-BK/R only comes in the Deluxe Kit.



- **Cable-Grey** – The C-GY Adapter is designed to connect pedals with battery power only (no power jack) to the Power-All. This cable can be used for powering vintage pedals made by MXR, ZVEX, & others.



- **Cable-Red** – The C-R/R Adapter features a right-angle Male Barrel Plug with a reverse polarity connection. It can be used to connect a pedal with tip-positive polarity to a power supply with a tip-negative output polarity.



- **Cable-Blue** – The C-BL/R and C-BL Adapters convert a standard 5.5 mm Barrel Plug to a 3.5 mm (1/8"), right-angle Phone Plug with reverse polarity. This cable can be used for pedals made by Electro-Harmonix, DOD, Ibanez, and ProCo. The Basic Kit comes with the C-BL (straight plug), the Deluxe Kit comes with the C-BL/R (right-angle plug).



- **Cable-Green** – The C-GN/R and C-GN Adapters features a Male Barrel Plug with a 2.5 mm Internal Diameter and reverse polarity. It can be used to power Line 6 Modelers as well as pedals from Electro-Harmonix, Digitech, & Eventide. The Basic Kit comes with the C-GN/R Right-Angle Cable, the Deluxe Kit with both Straight and Right-Angle versions.



- **Insulator Cable Caps** – Fit over unused male barrel connectors on a daisy chain or power supply. Cable-Caps protect against short circuits that can occur if a live lead touches a metal surface or liquid. The Basic Kit comes with 3 cable caps, the Deluxe Kit with 5.



All **POWER-ALL CABLES** now feature our custom **LO-PRO™** plug design – **LO-PRO™** plugs offer the smallest plug dimensions possible in order to save space on your pedalboard and to make connection to your pedals quick, easy, and efficient. All **LO-PRO™** male barrel plugs feature spring-loaded jacks to assure a snug connection that won't come dislodged, providing consistent power flow to your pedals.

- 5.) Make sure to cover any unused power jacks on the Daisy Chain with our yellow **Insulator Caps** to prevent short circuit connections.



ALWAYS REMEMBER TO CAP YOUR PLUG.

- 6.) Make all necessary audio connections, power up, and **Play!**

- If the PA-9 does not power up your effect chain properly, please unplug the unit from the power source, wait 5 minutes, then reconnect it to the power source.
- If the PA-9 still does not function properly, please contact us at service@godlyke.com for help troubleshooting the problem.

The **POWER-ALL**® **ECO-DAPTER**® features the following:

- 9 VDC, **2000 mA** regulated power supply.
- **Powers your pedals** from a single supply.
- **Ultra-low noise floor** for silent operation.
- Meets **DOE Level VI** energy efficiency standard.
- Carries CarbonFund.org **Carbonfree**® certification.
- Environmentally-friendly, **Recycled/Recyclable** packaging.
- **Space-saving** profile takes up only one outlet space.
- Special **low-noise** circuitry reduces ripple current and hum.
- **Ferrite-core filter** module on power output cable reduces noise and hum.
- Powers 9 VDC effects from **any** electrical outlet in the world (**100-240VAC**).
- **Heavy Duty** 10-foot, 24-gauge power cable.
- **Lifetime Warranty** – never buy another power supply!

For more information or to register your warranty, visit:

WWW.GODLYKE.COM/WARRANTY



PLEASE NOTE THE FOLLOWING POWER RESTRICTIONS

- The PA-9 provides 9-volt DC power ONLY. Any effect units that have a different voltage requirement cannot be powered by the PA-9. Some of these units may be able to be powered by the Iso-Pump™ voltage converter (sold separately). Please contact us at info@godlyke.com for more information.
- All effect units to be powered should have the same ground configurations to chassis. Effects with different ground configurations cannot be powered off the same PA-9 unit without using the Ground Hound™ ground isolator unit (sold separately). Please contact info@godlyke.com for more information.
- Make sure you check the polarity on all the units that you are planning to power BEFORE you connect them to the PA-9. Any damage caused due to improper connection is the sole responsibility of the user and is not covered by our manufacturer's warranty.



Box made from 100% recycled content, 95% post-consumer waste. Curbside recyclable, Compostable (though recycling is preferred). Made in the USA.

Label printed on bio-based compostable material and adhered with a compostable and recyclable adhesive. Meets composting standards for industrial composting environments. Holds or meets ASTM D6400, Biodegradable Products Institute, Compost Manufacturing Alliance, and EN13432 Standards and Certifications. Made in the USA.

For more information on

POWER-ALL® ACCESSORIES,

please visit:

WWW.GODLYKE.COM



*Digitech, DOD, EHX/Electro-Harmonix, Eventide, Ibanez, Line 6, MXR, ProCo, and ZVEX are registered trademarks of their respective companies and their usage implies no endorsement by or affiliation with Godlyke, Inc.

GODLYKE
DISTRIBUTING



GODLYKE
DISTRIBUTING 

© 2021 GODLYKE, INC.