Germaine Wall Light.

A wall light in noble Materials. Lamp. Weight materials. Solid cast & turned G4 LED 2.4W .38 KG

brass or aluminium. 110 Lumens

12V AC 2400K

Finishes. Environment. Class.

Weathered brass. Outdoor or Indoor

Class 1

dunlin.com.au

Polished Aluminium. IP42. orders@dunlin.com.au

Sandblasted @dunlinhome aluminium.


Electrical.

Requires a electronic transformer for 12V AC for 5W per fitting @ 6 A.

DUNLIN Page 1 of 4

Germaine Wall Light.

Dimensions.

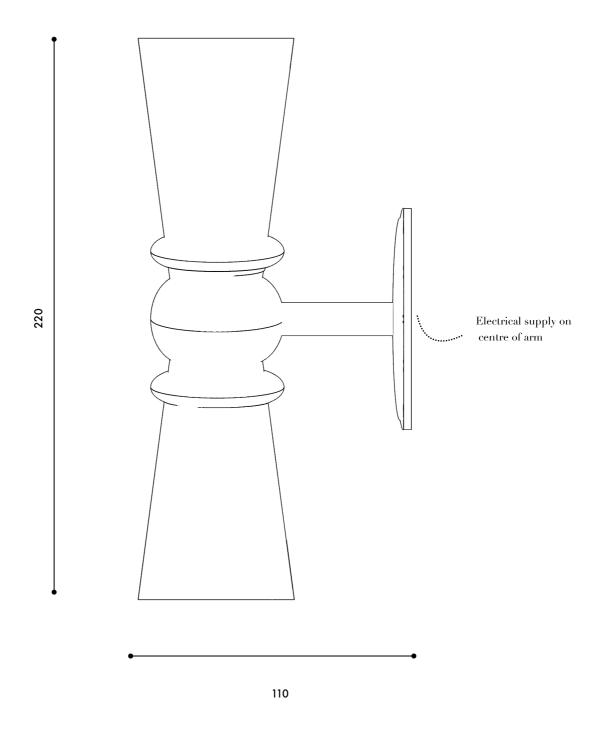


DUNLIN Page 2 of 4

A 8G x 50MM screws Qty 2

B Light Body.

C G4 LED internal. Optic. Do not open.

D Remote transformer, not provided.

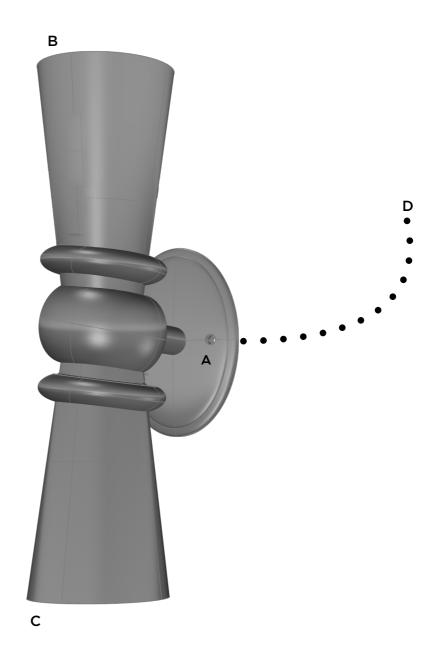

DUNLIN Page 3 of 4

Callot Wall Light.

Fixing Instructions.

- 1. Fitting requires installation by a qualified electrician.
- 2. Ensure the electrical supply is OFF. Disconnect the electrical supply at the mains board.
- 3. Position the light as required and mark the wall surface using the TWO mounting holes in the wall plate as a template.
- 4. Drill pilot holes, Insert rawl plugs (not provided) for masonry mounting. Mounting directly into timber does not require plugs but pilot holes are recommended.
- 5. Using WAGO connectors or similar (not provided) make the electrical connections within the wall cavity to the electrical transformer for 12V AC supply.
- 6. Use the provided screws to mount the fitting with the supplied screws.
- 7. Support the fitting during installation until all TWO screws are secured and set in place.
- 8. Switch on at the mains board. The fitting is now ready for use.

Care Instructions.

- 1. Brass is a noble material and will naturally patina. This is intentional.
- 2. Clean the light with a dry, soft cloth. Do not use polishes or abrasives.

DUNLIN Page 4 of 4