

Designed by Robert Dudley Best

## PRODUCT



Item no.: 001-0223X  
+ style code

**Don't polish the brass**

## DESCRIPTION

Bestlite has been in continuous production since 1930. Robert Dudley Best created Bestlite design. He was highly influenced by the Bauhaus. In the past 80 years, people appreciated the lamps and it decorates many homes, hotels and restaurants worldwide. Loved by architects, designers and design aficionados throughout its 80-year history, today, Bestlite enjoys global iconic status.

### VERSION - BESTLITE TABLE LAMP BL2

Shade: Charcoalblack, Matt-White or Grey  
Tube and arm: Brass with lacquered surface

Shade and base: Brass with lacquered surface  
Tube and arm: Brass with lacquered surface

RAL codes are indicative.

- Fabric wire - Black:
- Charcoal black/Brass / White inside // RAL 9011 / RAL 9003 // Gloss level 20 / Gloss level 20
- Grey w/Brass / White inside // RAL 2604005 / RAL 9003 // Gloss level 30 / Gloss level 20
- Brass w/Brass / White inside // - / RAL 9003 // - / Gloss level 20

- Fabric wire - Off-White:
- Matt-White w/Brass / White inside // RAL 9003 / RAL 9003 // Gloss level 20 / Gloss level 20


Please contact us for other colours or finishes.

## VERSION

Order item - look for part number in the pricelist.

Series contains the following:

**BL1, BL2**

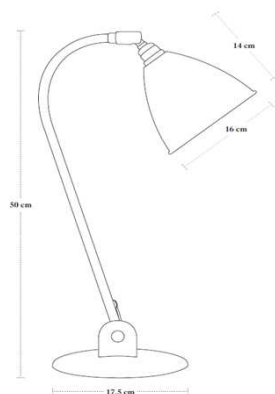

## COLOURS



// Charcoal black / Brass

// Grey / Brass

// Matt-White / Brass

// All Brass

## FACTS

### MEASUREMENT - L X W X H MM

Lamp height: 500 mm  
Lamp stand: Ø175 mm  
Shade height: 140 mm  
Shade diameter: Ø160 mm  
Cord - total length w/sw: App. 2500 mm  
Cord - exposed out of lamp: App. 2000 mm

WEIGHT ITEM - LAMP INCL. WIRE  
2472 g

PACKAGING TYPE  
White cardboard box w/ 5ply corrugated

PACKAGING MEASUREMENT - L X W X H CM  
L:40 x W:62.5 x H:24.5 cm

### WEIGHT PACKAGING - MATERIAL TYPE

- Paper Egg crate: 913.5 g
- PE polybag: 60 g
- Bestlite key: 18 g
- PE polybag: 1 g
- Cardboard outside: 760.5 g
- Cardboard top: 81 g

WEIGHT PACKAGING - TOTAL  
4227 g

NUMBER OF PARCELS  
1 pcs.

### LIGHT SOURCE:

- Socket: E14 base
- Recommended light source: *All fluorescens light bulbs*
- Recommended wattage: 9 W = (40 WATT incandescent bulbs)
- Max wattage: 13 W

- Recommended light source: *Halogen light bulb*
- Recommended wattage: 28 W = (40 WATT incandescent bulbs)
- Max wattage: 28 W

- All lamps can be fitted with a dimmer.  
Please contact your local electrician.

- Lightbulb not included

Designed by Robert Dudley Best

**CLEANING AND MAINTENANCE**

Use a soft damp cloth when cleaning your Bestlite lamp. Do not use household cleaners.

**ACCESSORIES**

Item no.: 001-99058B plug UK

**ENVIRONMENT**

-

**TESTS**

-

**CERTIFICATION AND LABELS**

CE-CERTIFIED

STANDARD

STOCK - BL2: Table lamp

- UK plug: Type G, 3 PIN, 13 amp
- British voltage: 230 V
- Frequency: 50 Hz
- Supply voltage: AC power ~
- Normally Closed IP20



Class II / Double insulated



CE-Mark



Luminaires accepted for mounting on a flammable base

**KOMPONENTS**

Item no.: 001-0223X

- 01 // Shade
- 05 // Lamp holder
- 10 // Insulating ring
- 11 // Internal shade ring
- 12 // External shade ring
- 13 // Lamp holder cover
- 15 // Universal joint
- 16 // Bestlite arm
- 19 // Bestlite nut
- 20 // Bestlite bolt
- 22 // Fibre washer
- 23 // Cord grip
- 24 // Cord grip cover
- 32 // Base cover
- 35 // Feltac
- 38 // Textile covered cord
- 40 // Switch
- 58 // Plug

**MATERIAL**

Shade and base: Powder coated aluminium  
 Tube and arm: Brass with lacquered surface  
 Textile covered cord

Shade and base: Brass with lacquered surface  
 Tube and arm: Brass with lacquered surface  
 Textile covered cord




**INSTALLATION INSTRUCTIONS**

The Bestlite key:

It's a practical tool that enables you to fasten the lamp arm. Simply use it like a screwdriver in the slot in the Bestlite nut.

1. Handle the product carefully and use it only on your wall for secure fitting of the lamp. Make sure the surface is level!



**Technical information:**

Light source: E14, E27, MR16 (max. 100W) or MR16 halogen bulb. Max. power of 100W (max. 1000lm).

Some advice on cleaning your Bestlite:

**Flammable material parts - shade, lamp holder and shade:**  
 Wipe the parts with a damp cloth (avoid in some cases use a lot of mild detergent).

**Chrome plated parts:**  
 Wipe the parts with a damp cloth and avoid any oil being left behind.

If the surface is dirty use a neutral pH neutral cleaner for cleaning on your wall mount.

Use only soft cloth for wiping and polishing, never sponges or household sponges.

Do not use abrasive household cleaners. Do not use acids or alkaline cleaning products, glass cleaner or household ammonia.



**BESTLITE**  
 SINCE 1929

BESTLITE - GUBI (A/S) // 10000000 7-6, 24-2106, Copenhagen, Denmark // www.bestlite.com

