



USER'S MANUAL

IMPORTANT SAVE THESE INSTRUCTIONS

To ensure you get the best results from your Oxileaf, please read this manual first and keep it for future reference. For additional information, please contact your place of purchase or call 1-800-225-6595

Thank you for choosing EdenPURE®



IMPORTANT SAFETY INFORMATION



WHEN TO UNPLUG THE EDENPURE® OXILEAF

Unplug OxiLeaf when cleaning it, or if you will be away from it for an extended period of time.

SAFE STORAGE AND USAGE



Do not plug OxiLeaf into places where flammable materials are stored.

DO NOT TAMPER

Do not allow small children to tamper with OxiLeaf.

KEEP AWAY FROM WATER

Do NOT plug unit in or near shower, bathtub or other places where humidity/moisture could seep into and damage OxiLeaf.

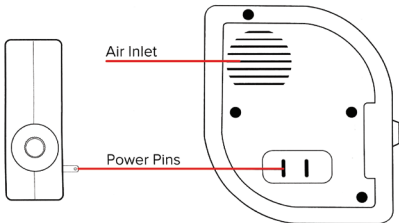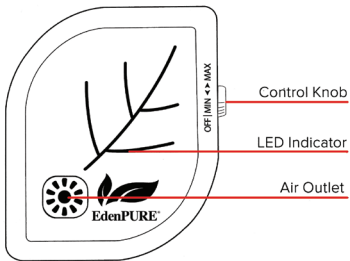

Air Inlet - Where air is pulled in.

Air Outlet - Port where fresh air is expelled.

Control Knob - Adjusts the amount of ozone produced.

LED Indicator - Light indicates when power is on.

Power Pins - Used to connect OxiLeaf into any standard electrical wall sockets.

INSTALLATION INSTRUCTIONS

- 1.** Remove the unit from its box and protective material from around the unit. Inspect the unit for any visible signs of physical damage. If damage is evident, repack and contact customer service.
- 2.** The unit can be placed anywhere in a room, but is not recommended for use within 6 feet of beds in unventilated rooms.

WARNING: Keep away from damp or wet surfaces.

- 3.** Plug the unit into a power socket. Rotate the “control knob” clockwise until you hear a click. This will turn the unit on. A green “LED Light” will appear. Adjust control knob to desired setting. The optimal setting is when the room is free and clear of unwanted odor and the air smells fresh without an overly strong purification smell.
- 4.** An ozone odor will be present at the opening of the unit. The presence of ozone is normal and indicates the unit is operating properly. Let the unit run for at least 2 to 3 hours and the ozone smell will gradually move through the room.
- 5.** Should the ozone odor ever become too strong, turn the side knob counter clockwise towards the minimum setting. The unit can also be set to extra quiet “night mode” by turning the knob until it clicks. This turns the fan off and sets the ionizer to minimum.
- 6.** The unit is effective against most odors and airborne particles if operated for approximately 12 hours per day. The use of this product does not substitute for proper cleaning, health and hygiene practice. Ozone air purifier will cause dust and other particles to settle out of the air and onto the surface where they can be taken away during normal cleaning.

7. The unit will automatically turn off/on for 3 minutes every half hour to cool down and conserve energy. The unit will be off for 3 minutes and then restart automatically at the setting it was running on before.

APPLICATION: kitchen, dining room, home with pets, smoke, and more

PURPOSE: removes unwanted odors, kills bacteria, mold and mildew

FEATURES

- Compact and portable
- Adjustable ozone control knob
- Quiet operation
- Almost maintenance free
- Plugs directly into 110V outlet

MAINTENANCE

EdenPURE® OxiLeaf air purifier is almost maintenance free; once every month the air inlet and outlet should be vacuumed. Disconnect the unit and vacuum using a brush attachment running on its lowest power setting. Gently brush back and forth over the openings to help remove internal and external contamination. Do not apply the vacuum cleaner for more than 10 seconds at a time or blow air into the unit.

Periodically wipe over the unit with a damp cloth. Do not spray with cleaning products or allow moisture to enter. It will damage the unit and this is not covered by the product warranty.

DISPOSAL

This product must not be thrown into the normal household rubbish. Please dispose of it separately at a location designated for this purpose.

In the unlikely event your unit does not appear to be working properly, contact customer service at **800-225-6595** or **custserv@edenpure.com**

SPECIFICATIONS

Model	A5908
Voltage	AC 110V to 240V, 50/60 Hz
Energy Consumption.....	< 11 watts
Size	5 1/8" x 4 1/3" x 3 1/2" (L*W*H)
Weight.....	7 1/2 oz.
Ozone Output.....	0.48-0.96 ppm (adjustable)
Ambient Noise	26 dB SPL to 34 dB SPL
Recommended Room Size	up to 100 sq. ft.



EdenPURE®

7800 WHIPPLE AVE NW
CANTON, OH 44767

WWW.EDENPURE.COM

800-225-6595