


# Repeater User Manual

## 1.Features

- Super receiving sensitivity
- Call range 1500 m (open space)
- Support to learn 999 transmitter
- Compatible with 1527 and 2262 codes

## 2.Component

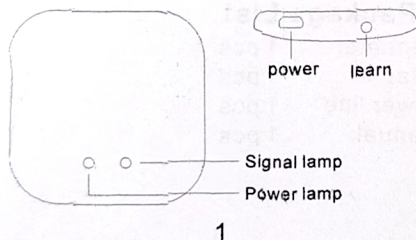

3.3 Delete all transmitters: long press the "learn" setting button for 3 seconds until the blue LED on the right side of the front cover is always on, and then long press the "learn" setting button for 5 seconds after release, until the blue LED light on the right side of the front cover flashes for 4 times, and all transmitters are deleted successfully.

## 4. Cautions

- 4.1 Do not install the repeater on metal
- 4.2 Mounting height is higher than 2 meters
- 4.3 Pay attention to waterproof and moisture-proof. Don't fall into the water.
- 4.4 If the receiver cannot receive the signal from the transmitter, adjust the distance between the transmitter and the repeater first, and then adjust the

## 3.Operation

3.1 Location of repeater installation: generally, the user should place the repeater in an appropriate position between the transmitter and receiver, and make appropriate adjustments to achieve the best signal coverage.

3.2 Transmitter codes: long press the "learn" setting button for 3 seconds until the blue LED on the right side of the front cover is always on, and then trigger the transmitter to be learned one by one. For each successful learning of a transmitter, the blue LED light on the right side of the front cover flashes twice. After all the codes are successfully matched, short press the "learn" setting key once to exit and enter the standby state.

distance between the repeater and the receiver to the best receiving state.

## 5. Technical Characteristics

- 5.1 Working frequency: 433.92MHz
- 5.2 Supply voltage: Input: AC100-240V  
Output: DC5V/1A
- 5.3 Standby current: <20mA
- 5.4 Working current: <200mA
- 5.5 Receive sensitivity: -110±2dBm
- 5.6 Ambient temperature: -20°C- 55°C

## 6.Package List

- |            |       |
|------------|-------|
| Repeater:  | 1 pcs |
| Adapter :  | 1 pcs |
| power line | 1 pcs |
| Manual:    | 1 pcs |