
# 6w or 9w Tri Colour Recessed Spot Light Installation Instructions



Product Specifications									
Model No.	HCP-1020961	HCP-1030961	HCP-1020962	HCP-1030962	HCP-1020963	HCP-1030963	HCP-1020964	HCP-1030964	
Material	Aluminium		Aluminium		Aluminium		Aluminium		
Colour	Black	White	Black	White	Black	White	Black	White	
IP Rating	IP20		IP20		IP20		IP20		
Cut Out	Ø112		Ø112		Ø112		Ø112		
Input Voltage	24	.0v	24	lOv	240v		240v		
Protection Class	2 (No Earth Required) 🔲		2 (No Earth Required)		2 (No Earth Required) 🔲		2 (No Earth Required)		
Lamp Base	Built in LED								
Lamp Wattage	1x 6 or 9w								
Colour Temp	Tri-Colour - 3000k, 4000k, 5000k								
Lumens	630-874lm, 668-943lm, 663-921lm		570-791lm, 607-589lm, 631-847lm		558-767lm, 596-832lm, 595-828lm		526-742lm, 562-797lm, 559-778lm		
CRI	> 90		> 90		> 90		> 90		
Dimmable	Yes - Triac	Dimmable	Yes - Triac	Dimmable	Yes - Triac Dimmable		Yes - Triac Dimmable		
Warranty	5 Years Re	placement*	5 Years Re	placement*	5 Years Replacement*		5 Years Replacement*		
			5 Years Replacement*						

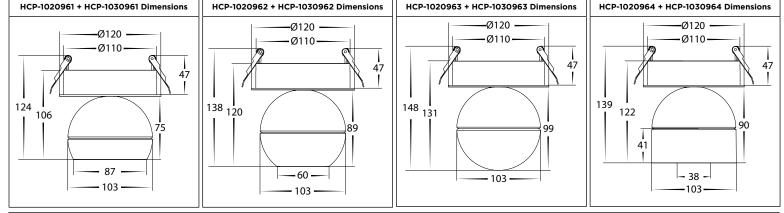

#### Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Commercial does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- Aluminium and 304SS fittings must not be installed within 5km of any salt water environments.
- All o-rings and seals must be in place correctly to maintain warranty
- This form may be updated at any time due to product improvements, please check online installation form for most current version.

#### **Steps for Installation:**

- 1. Make sure that the electrical circuit is free of voltage (master switch off)
- 2. Cut out hole to size shown above.
- 3. Insert cables into connector blocks on fitting,
- 4. Insert fitting into hole by pulling up the clips and inserting into hole and releasing so clips can spring back onto ceiling to hold fitting into place.
- 5. Fitting is set to 3000k and 9w, while fitting is switched off remove front lens by twisting anti clockwise
- 6. Select desired colour temperature and wattage by sliding switches
- 7. Reattach lens by twisting clockwise until you cannot twist anymore.
- 8. Direct light fitting to desired position by twisting left and right or up and down making sure not to twist too far to avoid damaging fitting.
- 9. Repeat these steps if more than 1 fitting is being installed
- 10. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

### Steps for Installation of Coloured Inner Ring:

- 1. Make sure that the electrical circuit is free of voltage (master switch off)
- 2. Remove inner ring from fitting by pully gently
- 3. Insert new coloured inner ring by lining up magnets and release

## Must be installed by a licensed electrician

Contact Details:	Warranty Ter	ms & Conditions*	www.havitcommercial.com.au
	3 itcommercial.com.au commercial.com.au		