

# FM010

## User Manual

**SINGGATE**

## DIGITAL DOOR LOCK




**FM010 Features:**

- Ergonomic design
- One-touch motion
- Anti-counterfeiting technology




**2y+ WARRANTY**

## 1. Register Admin (After Factory Reset Mode)

Step 1	Step 2	Step 3	Step 4
Tap on “>” and “ ”  Enter the setting mode	Press 123456 and “ ” 	Press 1 (Add User)	Press 1 (Add Admin)
Step 5	Step 6	Step 7	
Press 3 (Register Password)	Type your admin password (at least 6 digits) and press “ ” 	Repeat Step 6  <b>**NOTE :</b> After registered your own admin password, the default password (123456) will be replaced	

## 2. Register New Admin

Step 1	Step 2	Step 3	Step 4
Tap on "➤" and "↵" to enter the setting mode	Type your admin password and press "↵" to verify	Press 1 (Add User)	Press 1 (Add Admin)
Step 5			
For register <b>Fingerprint</b> , please <b>press 1</b> scan your fingerprint 5 times (same position)	For register <b>RFID Card</b> , please <b>press 2</b> tap the card on the card icon (below number 5)		For register <b>Passwords</b> , please <b>press 3</b> type your password and press "↵" then repeat

## 3. Register Normal User

Step 1	Step 2	Step 3	Step 4
Tap on "➤" and "↵" to enter the setting mode	Type your admin password and press "↵" to verify	Press 1 (Add User)	Press 2 (Add User)
Step 5			
For register <b>Fingerprint</b> , please <b>press 1</b> scan your fingerprint 5 times (same position)	For register <b>RFID Card</b> , please <b>press 2</b> tap the card on the card icon (below number 5)		For register <b>Passwords</b> , please <b>press 3</b> type your password and press "↵" and repeat

## 4. Delete User/Admin

Step 1	Step 2	Step 3
Tap on "↩" and "↵" to enter the setting mode	Type your admin password and press "↵" to verify	Press 2 (Delete User)
Step 4		
For delete by <b>Group</b> , please <b>press 1</b> Press 1 : delete all Fingerprints <b>OR</b> Press 2 : delete all RFID Cards <b>OR</b> Press 3 : delete all Passwords	For delete by <b>Index</b> , please <b>press 2</b>  Key in the user ID (Example: 005) and press "↵"	



## 5. Volume Setting


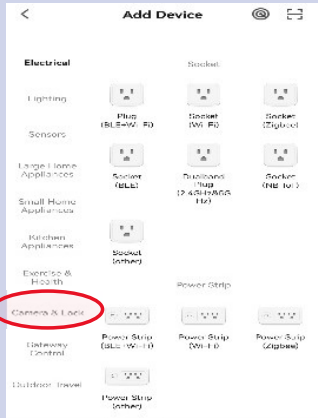




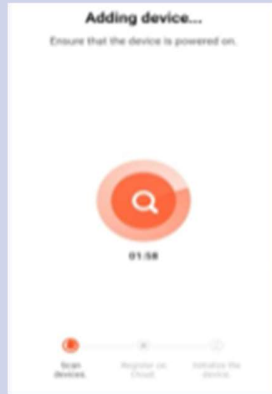
Step 1	Step 2	Step 3	Step 4
Tap on "➡" and "↩" to enter the setting mode	Type your admin password and press "↩" to verify	Press 3 (Setting Mode)	Press 3 (Volume Setting)  For <b>increase</b> volume, please <b>press 2</b> For <b>decrease</b> volume, please <b>press 8</b>  After that press "↩"

## 6. Language Setting

Step 1	Step 2	Step 3	Step 4
Tap on "➡" and "↩" to enter the setting mode	Type your admin password and press "↩" to verify	Press 3 (Setting Mode)	Press 2 (Language Setting)  For <b>chinese</b> , please <b>press 1</b> For <b>english</b> , please <b>press 2</b>

## 7. Connect to Wi-Fi (download **Tuya Smart App**)

Step 1	Step 2	Step 3	Step 4
<p>Please download "Tuya Smart" App and register an account</p> 	<p>Go to the lock setting            Tap on "➡" and "↩" to enter the setting mode</p>	<p>Type your admin password and press "↩" to verify</p>	<p>Press 3 (Setting Mode)</p>
Step 5	Step 6	Step 7	Step 8
<p>Press 5 (Network Config)</p>	<p>Press 1 (Test Mode) and "↩"            And the system will prompt "please wait....."</p>	<p>Open the Tuya Smart App (your phone)</p>	<p>Press the "+" button on the top right corner</p> 

Step 5	Step 6	Step 7	Step 8
<p>Press Add Device</p> 	<p>Select Camera &amp; Lock on the left side</p> 	<p>Select Lock (Wi-Fi)</p> 	<p>Enter your home Wi-Fi and password. Press Next. (connect with 2.4ghz)</p> 
<p>Press "Confirm the indicator is blinking rapidly"</p> 	<p>Select EZ Mode to proceed</p> 	<p>The App will then proceed to load</p> 	<p>The App will show added successfully once it has finished loading. Press Done on the top right corner.</p> 