




**READ AND FOLLOW ALL WARNINGS AND INSTRUCTIONS BEFORE INSTALLING OR MAINTAINING THIS PRODUCT. DO NOT INSTALL DAMAGED PRODUCT.**

Turn off power prior to any work on the track, system or product.  
 This fixture must be installed according to the National Electric Code and local building codes.  
 Do not install in damp or wet locations.  
 Do not install luminaire assembly closer than six inches from any curtain or similar combustible material.  
 Do not use this track with a power supply cord or convenience receptacle adapter.  
 Do not attempt to energize anything other than lighting track luminaires on the track.  
 To reduce the risk of fire and electric shock, do not attempt to connect power tools, extension cords, appliances, and the like to the track.  
 To reduce the risk of fire and electrical shock, the Luxlogic Tu or Ra track fixture can be used with Foshan Nanhai Renying Lamp Accessories Co. Ltd. track only.  
 There are no user serviceable parts inside. Opening unit will void warranty.  
 Contact point of purchase for service.

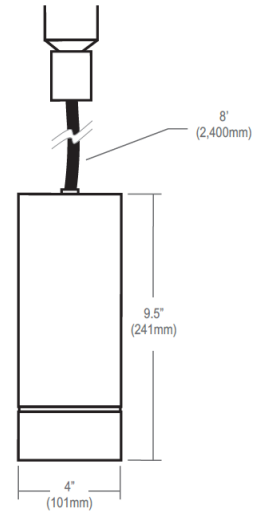

### Installation Instructions

To install the fixture to the track:

- Step 1. Pull back the adapter latch
- Step 2. Insert the contact assembly into the track.
- Step 3. Rotate the fixture neck 90° so the contacts on the fixture aligns with the contacts on the track.
- Step 4. Release the adapter latch allowing the fixture to lock into position (Fig. 1).

To remove the fixture:

- Step 1. Slide the adapter latch down until latch is clear of the track channel opening.
- Step 2. Twist the fixture neck and turn (90°) until the contact assembly is free.
- Step 4. Remove fixture from track.

