

# Xcortech XT301 Compact Airsoft Tracer Unit

## Manual

### Setup process

LED meaning:

- Red for selection of setting mode
- Green for selection of mode parameter

Example:


- Red Red = Red LED blink twice, go for APO setting
- Green Green Green = Green LED blink 3 times.

#### Setting mode (Red)

LED color	Blink times	Mode name	Parameter of mode
Red	●	Brightness	4 Level. ECO, Low, Middle, High
Red	●●	Auto Power Off (APO)	There are 3 Modes
Red	●●●	Exit setting	

#### Adjust parameter (Green)

Parameter	●	●●	●●●	●●●●
Brightness	ECO	Low	Middle	High (Default)
Auto Power Off	MODE 1 (Default)	MODE 2	MODE 3	-

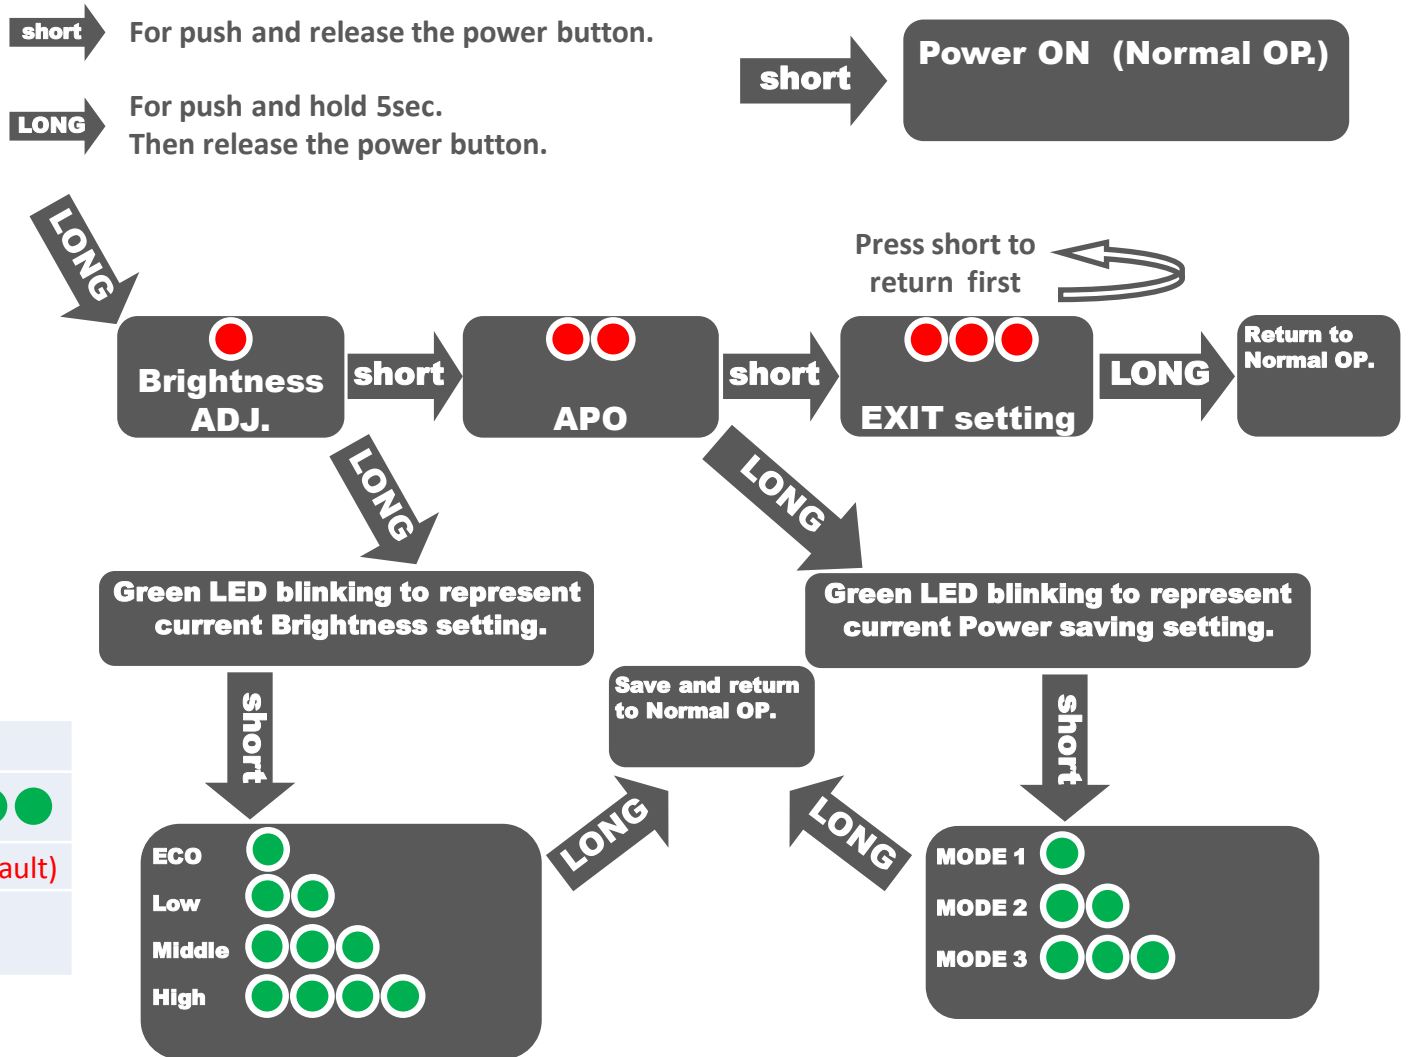

# Xcortech XT301 Compact Airsoft Tracer Unit Manual

## ● Detail of Auto Power Off (APO)

Power Control	Power Off by	Power On by
APO Mode		
Mode 1: Timer + Motion (Sensor) (Default)	No motion in 110 sec or Press PWR button	Any motion * or Press PWR button
Mode 2: Timer	No shot in 15 mins or Press PWR button	Press PWR button
Mode 3: Always On	Press PWR button	Press PWR button

In any mode above, If there is no motion in 100 sec, XT301 will into power saving status.  
(by inhibit something in circuit)

Any Motion will leave power saving status automatically.

\* If last time is press button to power off. Any motion will **NOT** Power On XT301.

## ● LED indicator

After power on, LED will blink several times every 4 sec.  
LED blink times represent current APO mode.  
Blink once: APO is mode 1  
Blink twice: APO is mode 2  
Blink 3 times: APO is mode 3

There are 4 LED colors to represent battery condition.

-  Good
-  Don't worry
-  A little concern
-  Empty

When charging in progress, Red LED breathing light will shown.  
After charging is completed, the green LED will light.

# Xcortech XT301 Compact Airsoft Tracer Unit Manual

## Feature

- Can be upgrade your own Silencer to Tracer
- High power UV LED technology.
- Battery last up to 20,000 rounds.
- Can sustain tracer function up to 35 RPS (2100 RPM).
- 2 side light sources for optimum illumination.
- Integrated Motion sensor inside.
- Built-in Lithium battery.
- Battery level indicator.
- Automatic power on / power off control by Motion sensor.
- USB Charging ready.
- For use with GREEN glow in the dark BBs only.
- Quick Charge: Charge 5 Mins for 1000 rounds.
- When no longer to use it, charge battery every 2 months.

## Specification

- Color: Black
- Diameter: 29mm
- Length: 60mm
- Threads: 11mm CW
- Weight: 41g
- Material: Aluminum
- Included: 14mm CCW Thread Adapter

