
XtendTouch XT1310F Quick Guide

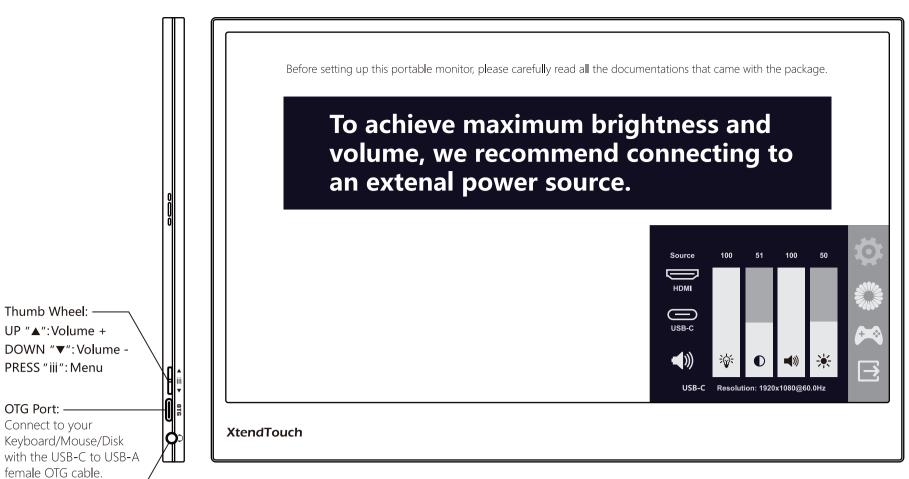

LED Indicator: Blue: working USB-C Display & **Power Input Port** Mini HDMI Input

Specifications:

3.5mm Audio Port -


(Does not support microphone)

Model	XT1310F			
Panel	13.3 inch IPS			
Device Size	307.1 x 197.0 x 10.0mm			
Weight	740g (without cover) / 965g (with cover)			
Resolution	1920 x 1080p@60Hz Max			
Luminance *	300 cd/m²			
Contrast Ratio	800 : 1 (Typ.) (TM)			
Color Gamut	72% NTSC			
Digital Input	USB-C(DP ALT MODE), Mini HDMI			
Viewing Angle	85/85/85 (Typ.)(CR≥10)			
Response	30 (Typ.)(Tr+Td) ms			
Touch	Yes, 10-point capacitive touch			
Interface	USB-C x 2, OTG Port x1, Mini HDMI Female x1, 3.5mm Audio			
Speakers	2			
Color	Black+Silver			
Compatible OS	Microsoft Windows, Linux, Mac OS, Chrome OS, Android, Nintendo Switch.			
Certification	RoHS, CE, FCC, CCC, PSE			

* Note:

In order to keep a stable performance, the luminace of the display will be limited. If you connect the adapter to the display, the limit will be automatically removed.

Package Content

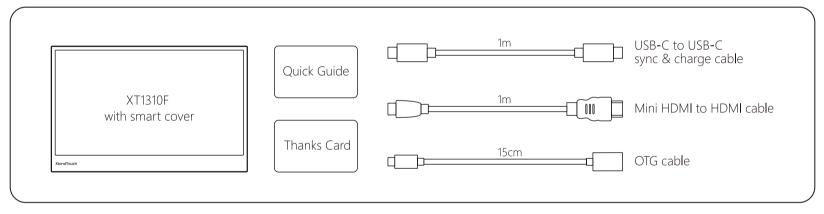

Supported platform:

	Display		Touch		OTG	
	USB-C	HDMI	USB-C	HDMI	Keyboard Mouse	Disk
Microsoft Windows	\odot	\odot	:	×	©	\odot
MacOS	:	<u></u>	×	×	©	©
Android *(Dex, EMUI)	:	:	©	×	©	(
Linux (Ubuntu)	:	\odot	☺	×	©	\odot
Nintendo Switch	⊙	⊙	×	×	×	X
Chrome OS	0	©	©	X	©	0
iPad OS	0	\odot	X	X	©	X

* Note: Work with devices that support DP ALT MODE. Please kindly make sure your device support <u>DP ALT MODE.</u>

Safety information:

- 1. To prevent fire or shock hazard, never expose this portable monitor to rain or
- moisture. 2. Never try to open this portable monitor cabinet.
- 3. Before using this portable monitor, make sure all cables are correctly connected and the power cables are not damaged. If you detect any damage, contact your dealer immediately.
- 4. Avoid dust, humidity, and temperature extremes. Do not place this portable monitor in any area where it may become wet. Place this portable monitor on a stable surface. 5. Never push objects or spill liquid of any kind into the slots on this portable
- monitor cabinet. 6. If you encounter technical problems with this portable monitor, contact a qualified service technician or your retailer.

Care & cleaning:

Cleaning. Turn your monitor off and unplug the cable. Clean the monitor surface with a lint-free, non-abrasive cloth. Stubborn stains may be removed with a cloth dampened with a mild cleaner.

Avoid using a cleaner containing alcohol or acetone. Use a cleaner intended for use

Never spray cleaner directly on the screen, as it may drip inside the monitor and cause an electric shock.

Where to find more information:

Refer to the following sources for additional information and for product. 1. Pepper Jobs websites

2. Optional documentation

The Pepper Jobs websites worldwide provide updated information on Pepper Jobs hardware and software products. Refer to http://www.pepper-jobs.com

Your product package may include optional documentation that may have been added by your dealer. These documents are not part of the standard package.

Warranty:

Pepper Jobs warranty comes from our commitment to the highest standard for protecting our environment. We believe in providing solutions for our customers to able to responsibly recycle our products.

Find out more details, please refer to our website http://www.pepper-jobs.com

For FAQs and more information, please visit:

www.pepper-forum.com



www.pepper-jobs.com/support

- @Pepper Jobs @Pepper Jobs Europe
- @PepperJobs
- @PepperJobs