
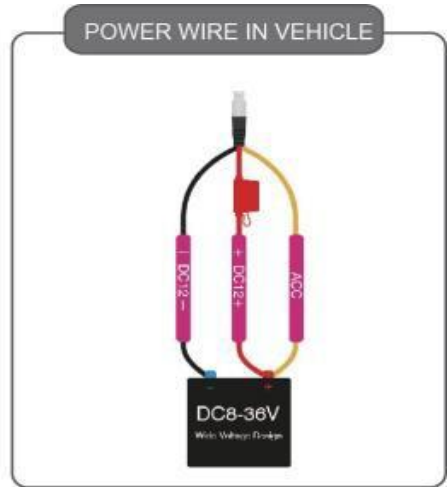


1080P 3-4-CH MDVR QUICK USER GUIDE

- 1.Specifications 2.Accessories 3.Power Connection
 4.MDVR Installation Guide 5.Control Bar Introduction 6.Playback Introduction
 7.AVI Back UP Introduction 8.Motion Detection 9.DST Time Setup 10.Record Setup


Specification

Items	Parameter	Performance
System	Chipset	Hi3520DV300
	System	Linux
	Language	Chinese/English/Russia etc
	Interface	Visual GUI,Support Mouse
	Account Management	Admin/Sub-User management
Record	Video Standard	PAL/NTSC
	Video Input	4-CH AHD Input
	Resolution	1080N/720P
	Video Connection	1-CH CVBS + 1-CH VGA Connection
	Image Quality	0-7 levels adjustable (0 is the best)
	Recording Mode	Boot up/Manual/Schedule/Alarm Record
	Motion detection	Support
Audio	Audio Input	4-CH Audio input
	Audio recording	Real time audio and video sounds
	Audio	G.726
	Audio Output	1-CH Audio Output
Playback	Mode	Playback by Time/File/Channel/Event
	Playback Channel	4-CH Local Playback
Interface	USB Port	1-CH USB 2.0 For Mouse or Upgrade
		2-CH RS232 & 2-CH RS485
	I/O Alarm Input	4-CH
	I/O Alarm Output	4-CH
Function	GPS	Time stamped
	WIFI Network	Optional
	RJ45 Internet Network	Standard
Others	Pre-Recording	0-15s
	Post-Recording	15s-300s
	G-sensor	Support
	Upgrade Mode	Local Upgrade by USB/SD card
	Storage	2x 256GB SD Card
	Voltage Input	DC8-36V
	Temperature	-20°C - +70°C
	Dimension	188mm*148mm*60mm
	Weight	2.35KG

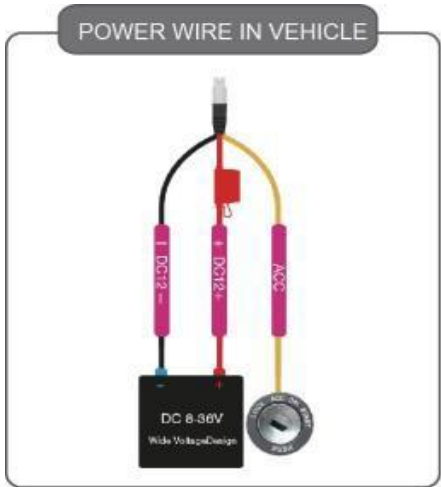

Dual Sd Card



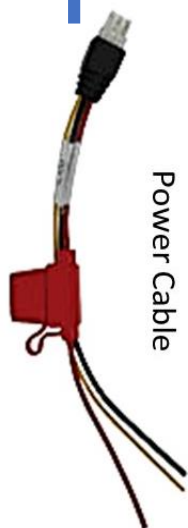

Power Cable

