



Aruba Instant On AP11

Wi-Fi designed with small businesses in mind

Perfect for small retail stores and home offices.

Small businesses are facing a number of challenges that need constant attention, so setting up and running a network shouldn't be on that list. Choosing the best Wi-Fi for your business should make your life simple.

We've made it easy to keep Wi-Fi users happy, mobile devices connected and your network secure. Setting up employee and guest networks is a breeze. Smart Mesh Wi-Fi makes it easy to cover every room without wires. And bandwidth hogs and unknown devices on your network are a thing of the past.

Whether you own a small retail store or a busy bed and breakfast, Wi-Fi plays such a critical role today. Aruba Instant On Access Points (APs) are easy to deploy and manage – at an attractive price point. Everything from mounting hardware to easy-to-use web and mobile app management tools, and business-grade software features are included – no extra charge or need for external controllers.

KEY FEATURES

Fast 802.11ac Wave 2, 2X2:2 MU-MIMO performance

Smart Mesh Wi-Fi support

Built in Wi-Fi router/gateway functionality

Content and device blocking controls

Simple to use bandwidth tuning for power-users

Easy-to-use web and mobile app for setup and management

Secure Guest Wi-Fi with simple setup

HIGHLIGHTS



Simplicity at its best

Wi-Fi that works right out of the box
Performance that keeps your users happy



Security you can count on

Simple features that keep business and guest traffic separate
Future-ready WPA2/WPA3 authentication for secure Wi-Fi access



We've got you covered

No extra licensing fees
Industry leading warranty and support

THE INSTANT ON DIFFERENCE

BUILT-IN SECURITY GATEWAY/FIREWALL

When it comes to stopping people and bots from accessing your network from the outside it's critical for small businesses. We've added advanced features that do not require external gateways and the complexity that comes with them.

EASY GUEST ACCESS

Customize the experience with your logo, authentication, rules of use or keep it simple. Applying bandwidth rates, setting data usage per app and limiting duration of use is also a breeze. Or use an external portal or service like Facebook Wi-Fi.

FAST ROAMING

Keep users happy as they move between spaces or meetings with a seamless handoff between APs. All you need is to use is secure WPA2 or WPA3 authentication on your secure networks and we do the rest.

MULTI-SITE MANAGEMENT


The cloud-hosted web interface and mobile app make it easy to manage multiple sites: multiple networks, distributed deployments and multi-tenancy deployments. Each site is logically separated and has its own configuration, statistics, guest portal, and admin read/write and read-only privileges.

SMART MESH

Each of the Aruba Instant On APs support extending coverage to those hard to reach spaces where Ethernet cabling may not exist. The Mobile App makes it easy to have a Mesh network up in minutes – indoor or out.

5 STAR VOICE AND VIDEO QUALITY

Wi-Fi Alliance Certified Instant On APs automatically detect and prioritize applications such as Skype, FaceTime and WeChat that use SIP, SCCP and other popular protocols. Now it's even easier to use softphones and the mobile apps that keep your users connected.

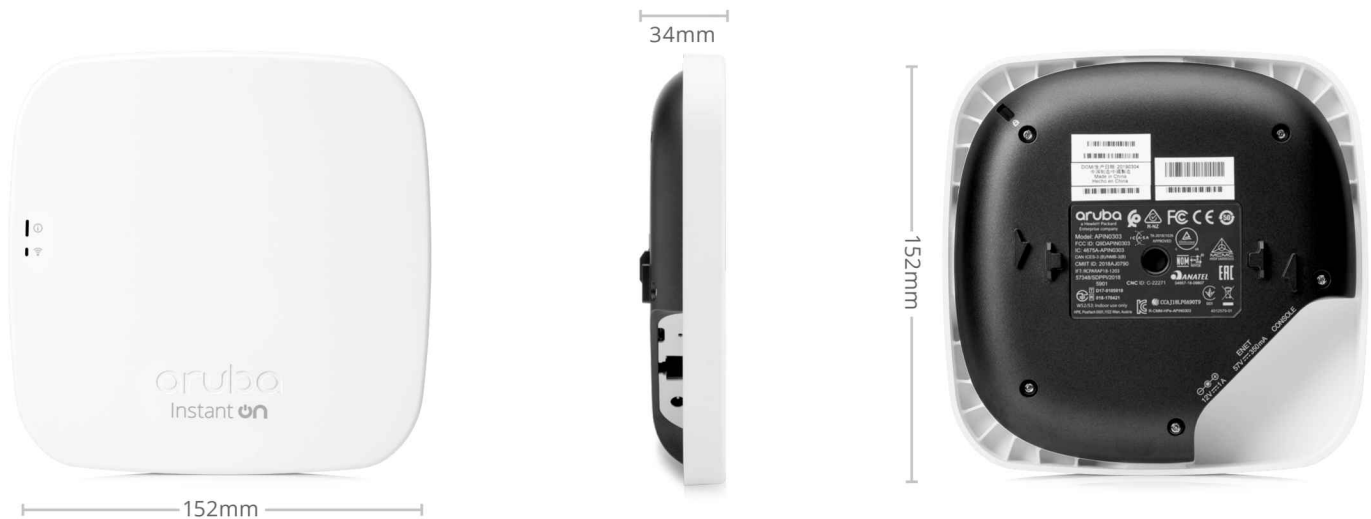

TECHNICAL SPECIFICATIONS

IN THE BOX

- Aruba Instant On AP11 Indoor Access Point
- Aruba Instant On AP11 Quick Start guide
- Ceiling rail mount clip
- Ethernet cable
- Solid surface mount clip

RADIOS

Dual radio for simultaneous dual-band operation

5 GHz 802.11ac 2x2 MIMO for up to 867 Mbps wireless data rate, with Multi User MIMO support (Wi-Fi 5)

2.4 GHz 802.11n 2x2 MIMO for up to 300 Mbps wireless data rate (Wi-Fi 4)

MAXIMUM (AGGREGATE, CONDUCTED TOTAL) TRANSMIT POWER (LIMITED BY LOCAL REGULATORY REQUIREMENTS)

- 5GHz band: +21dBm (+18dBm per chain)
- 2.4Ghz band: +21dBm (+18dBm per chain)

INTERFACES

- Uplink Gigabit Ethernet port, with PoE-in support (802.3af)
- DC power connector (12V)
- Bluetooth Low Energy (BLE) radio
- LED status indicators (2)
- Reset/LED control button
- Kensington security slot

PHYSICAL SPECIFICATIONS

152mm x 152mm x 34mm, excluding mount accessories

Weight: 193g

POWER

Power over Ethernet (POE): 802.3af (class 3)

Max power consumption (worst-case): 10.1W (PoE), 8.8W (DC)

DC power (12V)

Note: Power sources are sold separately

ANTENNAS

Integrated down-tilt omni-directional antennas with maximum individual antenna gain of 3.3dBi in 2.4GHz and 5.8dBi in 5GHz

MOUNTING

The access point ships with a (black) mount clip to attach to suspended ceiling rails, and a (white) mount clip to attach to solid surfaces (wall/ceiling)

ENVIRONMENTAL & RELIABILITY

Operating temperature: 0° C to +40° C (+32° F to +104° F)

MTBF: 795khrs (91yrs) at +25° C

INDUSTRY CERTIFICATIONS

UL 2043 plenum rating

EN 60601-1-1 and EN 60601-1-2 (for deployment in medical environments)

Wi-Fi Alliance certified (WFA) 802.11ac with Wave 2 (Wi-Fi 5), WPA2, WPA3

MANAGEMENT OPTIONS

Instant On mobile application (Android & iOS)

Cloud Portal: Portal.ArubaInstantOn.com

WARRANTY & SUPPORT

Aruba Instant On 1 Year warranty with 24X7 phone support for first 90 days and chat support for the entire warranty period. Community support as long as you own the products

ORDERING INFORMATION

Aruba Instant On Indoor AP11 Access Points

Part Number Points	Description	Comments
R2W95A	Aruba Instant On AP11 (US) 2x2 11ac Wave2 Indoor Access Point	Add PoE or DC Power Source
R2W96A	Aruba Instant On AP11 (RW) 2x2 11ac Wave2 Indoor Access Point	Add PoE or DC Power Source
R2W97A	Aruba Instant On AP11 (EG) 2x2 11ac Wave2 Indoor Access Point	Add PoE or DC Power Source
R2W98A	Aruba Instant On AP11 (IL) 2x2 11ac Wave2 Indoor Access Point	Add PoE or DC Power Source
R2W99A	Aruba Instant On AP11 (JP) 2x2 11ac Wave2 Indoor Access Point	Add PoE or DC Power Source
R3J21A	Aruba Instant On AP11 (US) Indoor AP with DC Power Adapter and Cord (NA) Bundle	
R3J22A	Aruba Instant On AP11 (RW) Indoor AP with DC Power Adapter and Cord (EU) Bundle	
Power Options		
R3X85A	Aruba Instant On 12V/36W Power Adapter	Add AC power cord
R2X20A	Aruba Instant On 12V/30W Power Adapter	Add AC power cord
R2X22A	Aruba Instant On 15.4W 802.3af PoE Midspan Injector	Add AC power cord <i>This Injector for Indoor Installation Only</i>
Power Options Continued Add 3-prong (C13) AC power cord for Power Adaptor/PoE Injector		
JW113A	PC-AC-ARG Argentina 220V AC 10A 2-meter AC Power Cord	
JW114A	PC-AC-AUS Australian AC Power Cord	
JW115A	PC-AC-BR Brazil AC Power Cord	
JW116A	PC-AC-CHN China AC Power Cord	
JW117A	PC-AC-DEN Denmark 220V AC 10A 2-meter AC Power Cord	
JW118A	PC-AC-EC Continental European/Schuko AC Power Cord	
JW119A	PC-AC-IN India AC Power Cord	
JW120A	PC-AC-IL Israel 250V AC 10A 2-meter AC Power Cord	
JW121A	PC-AC-IT Italian AC Power Cord	
JW122A	PC-AC-JP Japanese AC Power Cord	
JW123A	PC-AC-KOR Korea AC Power Cord	
JW124A	PC-AC-NA North America AC Power Cord	
JW125A	PC-AC-SWI Switzerland 220V AC 10A 2-meter AC Power Cord	
JW126A	PC-AC-TW Taiwan AC Power Cord	
JW127A	PC-AC-UK UK AC Power Cord	
JW128A	PC-AC-ZA South Africa 250V AC 10A 2-meter AC Power Cord	
Mount Kits - Spares		
JW044A	Instant On AP Ceiling Rail Mount Kit	Spare for what ships with AP11
Q9U25A	Instant On AP Low Profile Basic Mount Kit	Spare for what ships with AP11