LRS SERIES Outdoor Lighting

LRS-Q-MCT5-BR LRS-Q-MCT5-BK

WALL CUBE WITH ADJ. BEAM ANGLE UP/DOWN LIGHTS


Multi Color Temperature (Selectable)




The Westgate Wall Cube with Adjustable Beam Angle is a stylish, energy-efficient fixture offering customizable up/down lighting for indoor and outdoor use, enhancing spaces with elegant and effective illumination.



Customer Name:	
Project Name:	
Note:	Type:





4 1/2"(W) x 3 3/4"(H) x 4 1/2"(D)

Features

- Aluminum Housing and Steel Back Plate
- Adjustable Beam Angles 10° to 100° Up/Down
- 7-Year Warranty
- Multi CCT Switch is Inside Fixture

Technical Specifications

Electrical:

Voltage: 120V AC 60Hz

Wattage: 15WPower Factor: >0.90

Efficacy: 53 LPW

Mechanical:

- Aluminum Housing and Steel Back and Bronze Plate
- Adjustable Beam Angles 10° to 100° Up/Down
- Beam Angle Guidance Chart Included for ensuring consistent lighting across multiple units for a uniform and visually appealing lighting experience.
- Operating Temperature: -22°F to 104°F
- 7-Year Warranty
- Suitable For Wet Location



Selectable CCT Switch Inside The Housing

Lighting:


- Multi CCT Switch is Inside Fixture
- Total Lumens: 800LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Adjustable Beam Angles 10° to 100° Up/Down
- Rated life: 70,000 Hrs


Applications:

 The Westgate Wall Cube with Adjustable Beam Angle is a stylish, energy-efficient fixture offering customizable up/down lighting for indoor and outdoor use, enhancing spaces with elegant and effective illumination.



Photometrics: LLRS-Q-MCT5



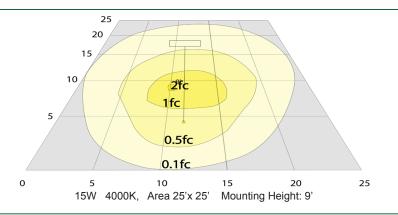

Other Views: LRS-Q-MCT5





















Performance Table: LRS-O-MCT5

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRS-Q-MCT5-BR	15W	120V	800LM	2700K 3000K 3500K 4000K 5000K	B0-U3-G1	53
LRS-Q-MCT5-BK						

Sample Ordering

Model Color Temp. Housing

LRS = Q = MCT5 = BR = Bronze
BK = Black

Factory-Installed Option:

Blank = No Option For Accessories

OPT-EM-LRS-Q-BK = Emergency Back up battery Installed in Back Box- Black OPT-EM-LRS-Q-BR = Emergency Back up battery Installed in Back Box- Bronze

FACTORY INSTALLED OPTION:





OPT-EM-LRS-Q-BK

OPT-EM-LRS-Q-BR





