

IMPORTANT SAFETY INSTRUCTIONS

READ CAREFULLY BEFORE INSTALLING THE FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/ abrasions, and other hazards please read all warnings and instructions included with and on the fixture box and all fixture labels.

Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.

Installation and service of luminaires should be performed by a qualified licensed electrician.

Maintenance of the luminaires should be performed by person(s) familiar with the luminaires' construction and operation and any hazards involved. Regular fixture maintenance programs are recommended.

DO NOT INSTALL DAMAGED PRODUCT! This product has been properly packed so that no parts should have been damaged during transit. Thoroughly inspect the fixture for any freight damage; freight damage should be reported to the delivery carrier.

WARNING: RISK OF ELECTRIC SHOCK

RISK OF ELECTRIC SHOCK. Make sure power supply is OFF before installing or maintaining fixture. No user serviceable parts inside.

CAUTION: RISK OF INJURY

Wear gloves and safety glasses at all times when removing luminaire from carton, installing, servicing or performing maintenance.

CAUTION: RISK OF FIRE

Do not operate in close proximity to persons, combustible materials or substances affected by heat or drying.

CAUTION: RISK OF PRODUCT DAMAGE

Only use product in its intended location.

User should prepare necessary accessories and spare parts (not provided) including junction box, cross bar, junction box gasket, surface plate and screws.


Always read the fixtures complete installation instructions prior to installation for any additional fixture specific warnings.

CAUTION: INTENDED APPLICATION


Designed for working with 14" housing wall pack to cover 18" footprint on the wall

MOUNTING

1. Use the four holes on the beauty plate to mark exact locations of the screw holes on the wall. Drill holes accordingly to the marks into the wall, and insert the wall anchors into the holes.

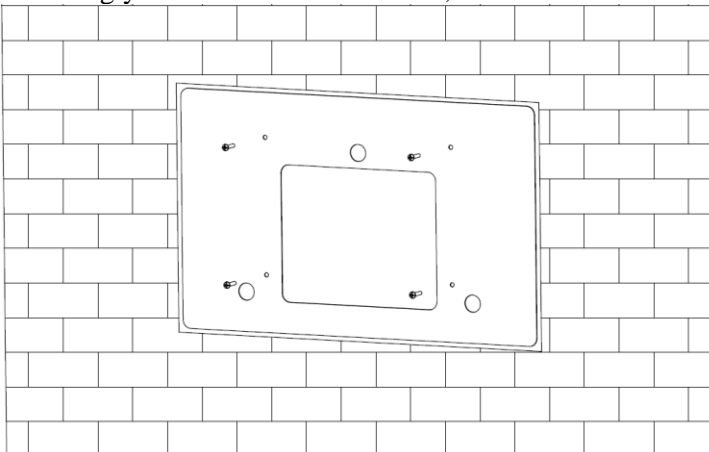

- Align the holes of the beauty plate with the holes on the wall. Tighten the screws into the holes to secure the beauty plate.
Do NOT put upside down.

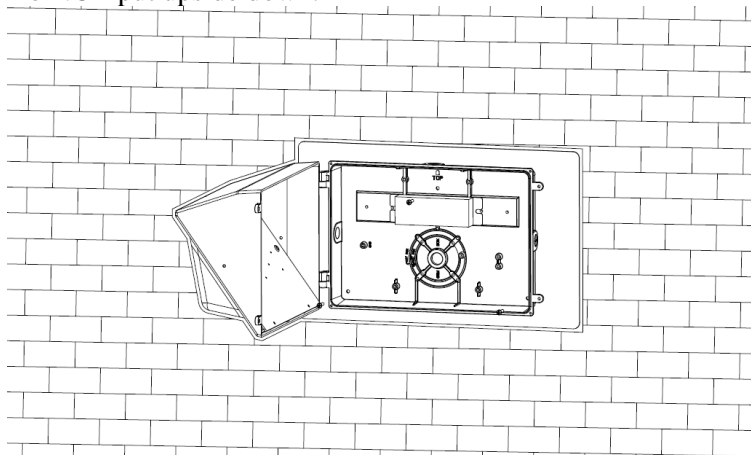

- Install wall pack fixture (14" housing) according to the footprint of beauty plate.
Refer to "wall pack install instruction" for more details.
Use silicone sealant (not provided) all along the bottom of the fixture and beauty plate to ensure tight seal against surface.

