


GreenUp Highbay 飞利浦LED高天棚灯

BY550P


Mounting instruction/安装说明

4441 700 96321



产品名称 Description	色温 Color	配光 Optics	重量 Weight	系统功率 Wattage
BY550P LED200/CW PSU WB	CW	WB	6.3kg	160W
BY550P LED200/CW PSU NB		NB		
BY550P LED200/CW PSU HRO		HRO		
BY550P LED200/NW PSU WB	NW	WB		
BY550P LED200/NW PSU NB		NB		
BY550P LED200/NW PSU NB		HRO		
BY550P LED140/CW PSU WB	CW	WB	5.5kg	110W
BY550P LED140/CW PSU NB		NB		
BY550P LED140/CW PSU HRO		HRO		
BY550P LED140/NW PSU WB	NW	WB		
BY550P LED140/NW PSU NB		NB		
BY550P LED140/NW PSU NB		HRO		
BY550P LED100/CW PSU WB	CW	WB	3.5kg	80W
BY550P LED100/CW PSU NB		NB		
BY550P LED100/CW PSU HRO		HRO		
BY550P LED100/NW PSU WB	NW	WB		
BY550P LED100/NW PSU NB		NB		
BY550P LED100/NW PSU NB		HRO		

Dimensions 尺寸

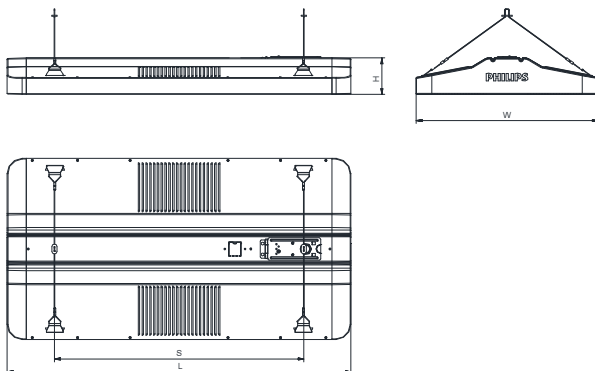


Type 型号	Dimension 尺寸(mm)			
	L	W	H	S
BY550P LED200	720	380	77	522
BY550P LED140	720	380	77	522
BY550P LED100	440	380	77	250


Philips (China) Investment Co., Ltd.
 Address: Room 1602-1605, No.218 Tianmuxi Road, Shanghai, P.R. China
 Postalcode: 200070
 飞利浦(中国)投资有限公司
 地址: 中国上海市天目西路218号1602-1605
 邮编: 200070

PHILIPS

Installation 安装应用 Suspending/悬吊安装

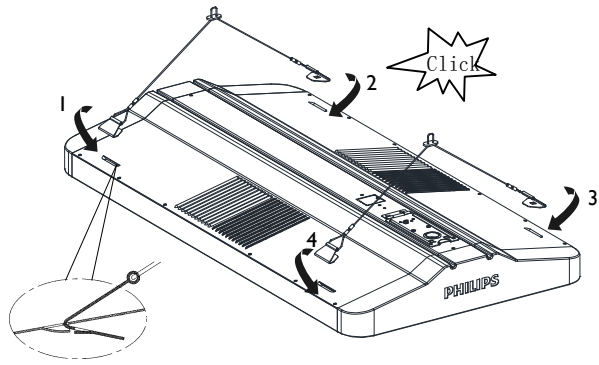

Adjust to be balance
调节平衡

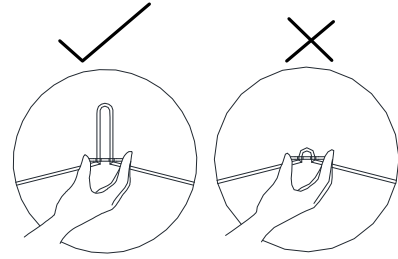


Rope slings should be big enough for installation.
为了便于安装吊绳扣应该大一些





Note: Hanging hook must be inserted the hole completely at the label location. Check it is not pulled from the mounting hole.
注意：挂钩插入标示安装孔位且其上的卡扣必须完全嵌入安装孔中，检查其不能往回拔出安装孔方为安装到位！


Electric connection/电器连接

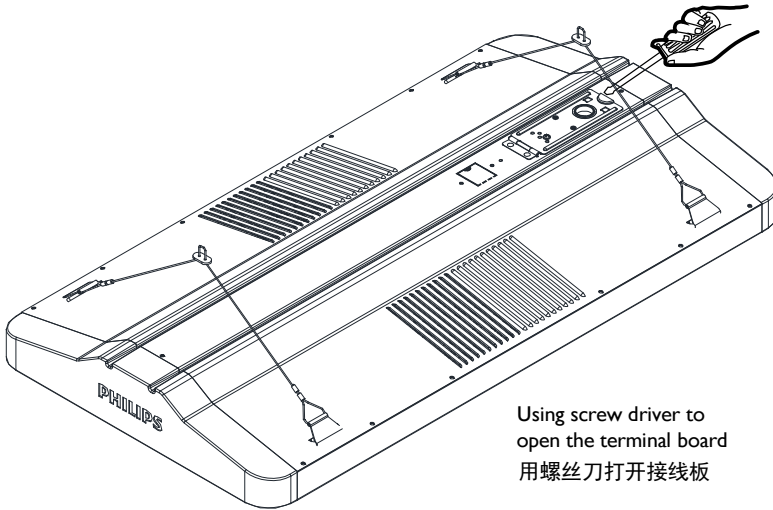

Using screw driver to
open the terminal board
用螺丝刀打开接线板

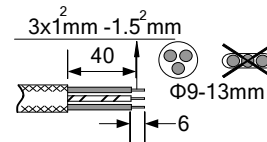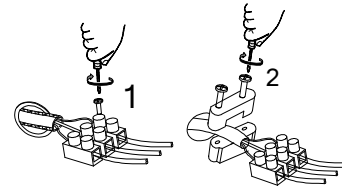

1 HRO应用实例
HRO application

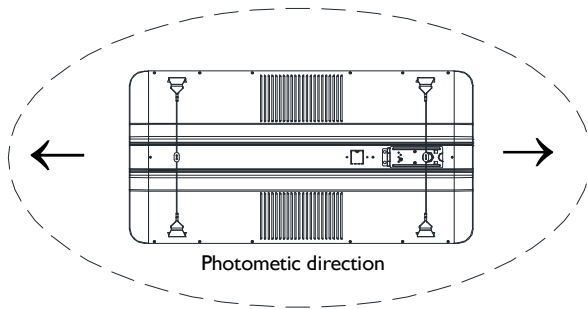

Photometric direction

*灯具的发光方向与悬挂附件垂直
The lighting direction is perpendicular to suspension accessories.



1. The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.

灯具应由有资格的电工安装，接线要符合IEE电气标准或国家标准。

2. The luminaire is complied to IEC 60598-1 ed. 6 or GB 7000.1-2007.

此灯具是依据IEC 60598-1 ed. 6 或国标GB 7000.1-2007所制造。

3. In order to ensure optimum performance, please clean the luminaire regularly (recommended twice a year). While cleaning the luminaire, please use a soft cotton pad only.

为了保持灯具明亮效果，请定期（半年一次）进行清洁。灯具清洁时请使用软布擦拭。

4. This luminaire is only suitable for 5-13 meters high indoor usage. And not suitable for the corrosive environment and area prone to hurricane and extreme winds.

本灯具适用于安装在室内5-13m高空使用。且不适合安装在会产生酸碱碱性腐蚀的环境及海边、港口等强台风多发地区。