


HLC Keypad Room Controller

hlc™

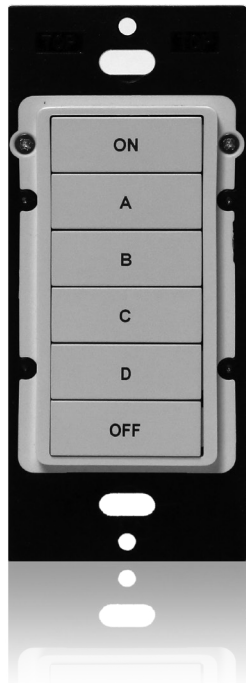

APPLICATION

The HLC Keypad Room Controller, available in white or light almond, is designed to be a room or house controller for the HLC product line, including dimmers, switches, plug-in modules, and hard-wired load controls.

As a room controller, default settings are pre-programmed. Scene A provides 80% illumination in a room, B represents 60%, C represents 40%, D represents 20%, as well as on/off buttons to turn the room on or off. When the room is on, the on/off buttons can be held to brighten or dim the entire room. If a homeowner wishes to adjust the room to a custom look, they may adjust dimmers and switches to the appropriate illumination and then press the scene button five times to save. When using an Omni family controller with PC Access software, the scene buttons can be programmed for custom scenes based on activity such as homework, movie time, dinner prep, and more.

This device can function as a six room house status switch if it is set up on the eighth address in a room. In that case, the top/on button controls the first room in that room group, the bottom/off button controls the second room, and the “A” through “D” buttons control the third through sixth rooms, respectively.

The keypad is unique in that it can be configured as a room, house, or general purpose keypad, for scene, zone, and/or automation functionality.

FEATURES AND BENEFITS

- Includes pre-programmed scenes with manual customization options
- Control all lights in a room or area
- Custom engraving available
- Leviton recommends every HLC installation include a Phase Coupler, part number 39A00-1
- Manual Lock-out is perfect for kids and parties.

WARRANTY INFORMATION

Two-Year Warranty

Leviton Manufacturing Co., Inc. Global Headquarters

201 N. Service Rd. Melville, NY 11747-3138 Tech Line: 1-800-824-3005 Fax: 1-800-832-9538

Leviton Manufacturing Co., Inc. Energy Management, Controls and Automation.

4330 Michoud Blvd., New Orleans, LA, 70129 Tel: 1-504-736-9810 Fax: 1-504-253-2954


Visit our Website at: www.leviton.com/emca

©2016 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

SPECIFICATIONS:

Number of Backlit Pushbuttons with LED Indicators	6
Dimensions	4.1 x 1.75 x 1.2
Weight	3.2 oz
Mounting	Standard J Box
Input Power	120 ± 12 VAC
Standby Power	< .8 Watts
Input Frequency	60 ± 3 Hz
Temperature	-40 °F to 194 °F

WIRING DIAGRAM

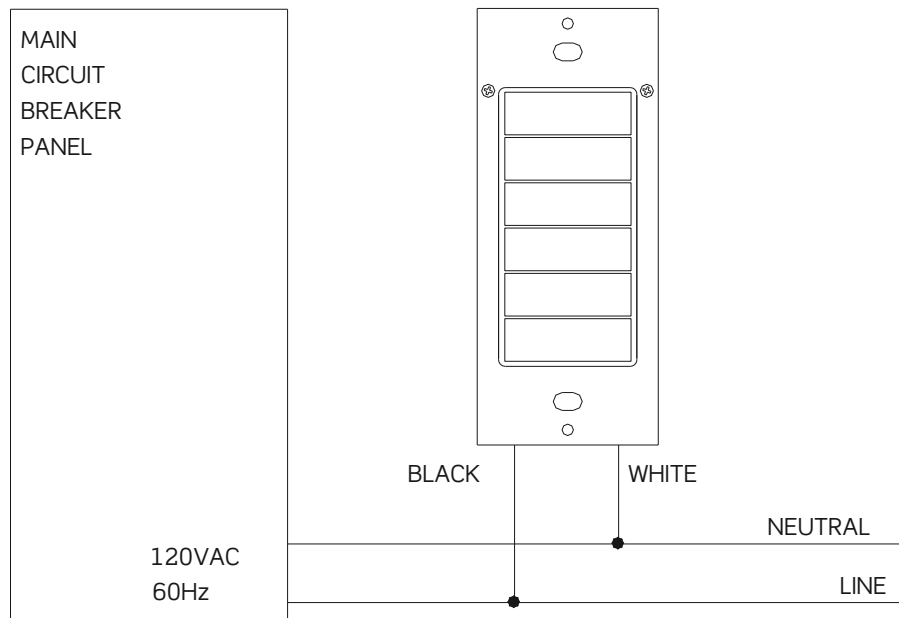

ORDERING INFORMATION

DESCRIPTION	CAT. NO.
HLC Keypad Room Controller, White	001-HLCK6-00W
HLC Keypad Room Controller, Light Almond	000-HLCK6-00T

Leviton Manufacturing Co., Inc. Global Headquarters

201 N. Service Rd. Melville, NY 11747-3138 Tech Line: 1-800-824-3005 Fax: 1-800-832-9538

Leviton Manufacturing Co., Inc. Energy Management, Controls and Automation.

4330 Michoud Blvd., New Orleans, LA, 70129 Tel: 1-504-736-9810 Fax: 1-504-253-2954

Visit our Website at: www.leviton.com/emca

©2016 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

SAT-10094