



**MADE TO  
GO TO WORK**

Mizco International Inc.  
80 Essex Avenue East Avenel, NJ 07001  
techsupport@mizco.com  
www.toughttested.com

**TT-HFB-P2**

**PROCOMM<sup>2</sup>  
BLUETOOTH  
EARBUDS**

**USER MANUAL**



Thank you for purchasing ToughTested® Procomm2 Bluetooth Earbuds, model number TT-HFB-P2.

ToughTested audio products are made to go to work. Ergonomic design combined with state-of-the-industry materials and specifications bring you an audio collection that looks and performs like no other. With noise control technology and exclusive, proprietary features, ToughTested earbuds are engineered and certified to help reduce environmental noise while providing clear, precise audio for music and calls.

Safety information .....	02
Package contents .....	03
Location of controls .....	04
Charging the earbuds .....	05
Pairing the earbuds .....	06
Connecting to multiple devices .....	07
Playing music on your earbuds .....	08
Managing phone calls on your earbuds .....	09
Earbud organization and storage .....	11
Protecting your ears in noisy environments .....	12
Specifications .....	13
Care and Maintenance .....	14
Changing ear tips .....	15
Warranty .....	16

## SAFETY INFORMATION


Please read this user's manual carefully and follow all instructions.

In particular, please heed the following cautions:

- Do not turn up the volume to an excessively high level. Extended exposure to high-decibel sounds may cause permanent hearing loss.
- Do not turn up the volume so high that you can't hear what's around you or respond to potentially hazardous situations.
- Do not use earbuds while driving or cycling, which could hinder traffic safety.
- Do not immerse earbuds in water.
- Do not pull on the cords to remove the ear tips from your ears. Instead, gently remove the ear tips with your fingers.
- Do not expose earbuds to extreme heat or direct sunlight for extended periods.



Procomm2 Bluetooth Earbuds



Micro USB charging cable




Flexfoam™ secure fit ear tips (medium)



Triple flange ear tips (small and medium)

## Package Includes:

- Procomm2 Bluetooth Earbuds
- Flexfoam™ secure fit ear tips (small and medium)
- Triple flange ear tips (small and medium)
- Micro USB charging cable
- User manual

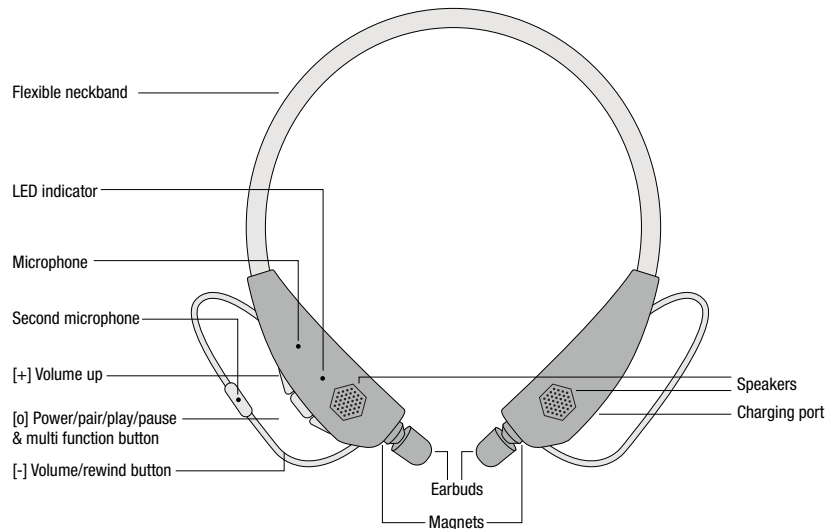

## CHARGING THE PROCOMM2 BLUETOOTH EARBUDS

The Procomm2 Bluetooth Earbuds battery lasts for approximately 15 hours of talk time or 10 hours of play time per charge.

1. Connect the small end of the micro USB charging cable to the micro USB port on the earbuds.
2. Connect the large end of the micro USB charging cable to the USB charging port on an AC charger, wall outlet, or laptop. The LED indicator will remain RED during the charging process.
3. Disconnect the cable from the earbuds and the charging port once charging is complete. The earbuds take approximately 1 hour to fully recharge.

**Note:** Select devices support a battery readout meter feature, which shows the remaining battery life of the Bluetooth-connected device. Check your device's user guide to see if this feature is supported.

## PAIRING THE PROCOMM2 BLUETOOTH EARBUDS

Pairing the Procomm2 Bluetooth Earbuds to a device

The Procomm2 Bluetooth Earbuds connect to Bluetooth-enabled devices with version 4.0 or higher.

In order to pair the earbuds to your device, follow the directions below:

1. Press and hold the power button until a voice is heard which indicates the earbuds are now in pairing mode. The LED indicator will alternately flash blue and red.
2. Set your device to search for Bluetooth devices.
3. Open the Bluetooth feature on your device. Consult your device's user guide for more information.
4. Select "PROCOMM2" from the list of devices in the populated list.
5. If asked, enter the password "0000."
6. A voice prompt will be heard, confirming a successful pairing.

## CONNECTING TO MULTIPLE DEVICES

These earbuds have a multi-connection feature, which connects the earbuds to two devices simultaneously. In order to activate this feature, follow these steps:

1. While paired to your mobile, please close the Bluetooth on the phone. Long press MFB button for 1 second, the indicator is in flashing blue and red(pair mode).
2. Search the Bluetooth name: PROCOMM2, connect to your second device.
3. Please open the Bluetooth on your first device and connect.

## PLAYING MUSIC ON YOUR PROCOMM2 BLUETOOTH EARBUDS

### Play/pause music:

Short press the power button to pause the music.

Short press the power button again to resume playback.

Short press the power button to begin playing.

### Adjusting volume:

Short press the volume up button to increase the volume.

Short press the volume down button to decrease the volume.

Note: Volume can also be controlled directly from the connected device.

### Navigating a playlist:

Long press the volume up button to skip to the next song.

Long press the volume down button to return to the last song.

## MANAGING PHONE CALLS ON YOUR PROCOMM2 BLUETOOTH EARBUDS

**To accept a phone call:** Short press the power button to accept an incoming phone call. The earbuds will vibrate to signal an incoming call.

**To end a phone call:** Short press the power button to end the call.

**To reject an incoming phone call:** Long press the power button to reject an incoming phone call.

**To accept a second incoming call:** Short press the power button to accept a second incoming call.  
Note: your first call will automatically be placed on hold once you accept a second incoming call.

**To reject a second incoming call:** Press and hold the power button for approximately 2 seconds to reject a second incoming call.

**To switch between phone calls:** Long-press the power button to switch between the two active phone calls.

**Toggling between earbuds and speaker:** The speaker mode on the earbuds also acts as a speakerphone. Short press the earbud/speaker toggle button in order to switch from earbuds to speakerphone and back again.  
Note: The accepted call will be heard through the earbuds' current mode.

**Using your earbuds with digital voice dialing:**

The Procomm2 earbuds can access voice-activated search functions such as Siri on Apple products.

Double-press the power button in order to activate the device's digital personal assistant.

Press the power button to end the session.

Note: Pause music before attempting to activate a digital personal assistant.

**Speaker mode:**

The Procomm2 Bluetooth Earbuds have speakers built into the right and left neckband. To switch from headphone mode to speaker mode, short-press the earbud/speaker toggle button. Current audio will immediately route to the speakers.

Short-press the earbud/speaker toggle button to return to headphone mode.

**EARBUD ORGANIZATION AND STORAGE**

The earbuds are equipped with magnets that organize the ear tips.

The magnetic ear tips connect in two ways: (line art here)

1. At the base of the neckband
2. To each other

Note: Metallic materials may be attracted to the headset. Do not place credit cards or magnetic storage media near the headset because information stored on them may be erased.

## PROTECTING YOUR EARS IN NOISY ENVIRONMENTS

The Procomm2 Bluetooth Earbuds have an EPA noise-reduction rating of 26dB. It's important to note that this number is a benchmark guideline. Because each person's ears are unique in shape and hearing sensitivity, the actual amount of noise reduction experienced with the earbuds varies from person to person.

The Procomm2 Bluetooth Earbuds come with two sizes of Flexfoam ear tips, which are particularly effective at blocking ambient noise because they expand to fit snugly in the ear canal.

For more information on hearing safety, visit:

[www.tough-tested.com](http://www.tough-tested.com)

[www.hearingconservation.com](http://www.hearingconservation.com)

[www.cdc.gov/niosh/topics/noise](http://www.cdc.gov/niosh/topics/noise)

[www.dangerousdecibels.org](http://www.dangerousdecibels.org)

## WIRELESS DEVICE SPECIFICATIONS:

- Bluetooth: CSR
- Battery 3.7V 650mAh
- Driver 10mm
- Sensitivity: 93dB $\pm$ 3dB
- Resistance 16 $\Omega$
- Frequency Response 20Hz-20kHz
- Operating range up to 50feet
- Using time 15 Hours
- Charging Time 40-60mins
- Impedance: 32 $\Omega$  $\pm$ 15%



## CARE AND MAINTENANCE

Your device is a product of superior design and craftsmanship and should be treated with care. The suggestions below will help you protect your warranty coverage.

- Keep all accessories and enhancements out of the reach of small children.
- Keep the device dry. Precipitation, humidity, and all types of liquids or moisture can contain minerals that corrode electronic circuits. If your device gets wet, allow it to dry completely.
- Do not use or store the device in dusty, dirty areas. Its moving parts and electronics components can be damaged.
- Do not store the device in hot areas. High temperature can shorten the life of the electronic devices, damage batteries, and warp or melt certain plastics.
- Do not store the device in cold areas. When the device returns to its normal temperature, moisture can form inside the device and damage electronic circuit boards.
- Do not drop, knock, or shake the device. Rough handling can break internal circuit boards.
- Do not use harsh chemicals, cleaning solvents, or strong detergents to clean the device.
- Do not paint the device. Paint can clog the moving parts and prevent proper operation.

All of the above suggestions apply equally to your device, battery, charger, or any enhancement.

## CHANGING EAR TIPS

The Procomm2 Bluetooth Earbuds come with Flexfoam™ ear tips and triple flange ear tips, two sizes of each. Flexfoam ear tips provide maximum noise reduction, while triple flange ear tips provide an accurate and secure fit inside the ear.

To change the ear tips:

1. Gently twist the old ear tip until it comes off the earbuds.
2. Place the ear tip's cylindrical opening on the earbud's driver stem.
3. Gently twist the ear tip downward into place until it fully covers the driver stem.

Note: Do not yank the ear tips off the earbuds. This may damage your earbuds.

## WARRANTY

### FCC statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received, including interference that may cause undesired operation.

-\*“Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment.”

-\*“Note: This equipment has been tested and found to comply with limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, used and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communication.”

Note: Ear tips are replacement parts and are not included in the product warranty. To find out how to order replacements, visit [www.tough-tested.com](http://www.tough-tested.com).

Thank you for purchasing a ToughTested® product from Mizco International, Inc.

We want you to enjoy this product without any problems. However, in the unlikely event that it malfunctions, we will either repair or replace it as part of the product’s limited warranty.

At the first sign of trouble and before returning the product, we encourage you to call the ToughTested® toll-free customer support line for assistance at 1 (800) 266-4026.

If the product has malfunctioned during normal use, the responsibility of ToughTested® is limited solely to the repair or replacement, at its option, of the product. This warranty does not extend to damage or failure that results from misuse, neglect, accidents, alteration, abuse, or improper installation or maintenance.

All brands represented herein are registered trademarks of their respective manufacturers. Design and specifications are subject to change without notice.

Disassembling any of the fixed parts will void your warranty.

© Mizco International, Inc. All rights reserved.

All trade names are registered trademarks of the respective manufacturers listed.

Mizco International, Inc., Avenel, N.J. 07001

Tech support: 1 (800) 266-4026; [techsupport@mizco.com](mailto:techsupport@mizco.com)

[www.mizco.com](http://www.mizco.com)