



Halogen non-reflector

5761 30W 6V 100PK

Halogen non-reflector lamps offer high-quality light and are easy to install, replace and operate. All halogen non-reflector lamps incorporate a distortion-free quartz bulb and a precise positioning of the mounted filament. These ensure optimal beam performance and consistent, high light output. A wide range of wattages is available for a broad variety of applications, including projection systems. In addition you get all the proven advantages of halogen technology such as a full spectrum and a color rendering index (CRI) of 100 – the same as natural light and the best that it can be. Halogen lamps also create a comfortable warm white light, and they maintain their lumen output, with almost no reduction, throughout their lifetime.

Product data

• General Information

Cap-Base	G4 [G4]
Philips Code	5761
ANSI Code	-
LIF Code	-
Operating Position	Universal [Universal]
Main Application	Projection
Life To 50% Failures (Nom)	100 h

• Light Technical

Initial lumen (Nom)	765 lm
Correlated Color Temperature (Nom)	3200 K
Color Rendering Index (Nom)	100

• Operating and Electrical

Power (Rated) (Nom)	30 W
Voltage (Nom)	6 V

• Mechanical and Housing

Bulb Material	Quartz-UV Open
Filament Dimensions WxH	1.5x1.5

• Luminaire Design Requirements


Bulb Temperature (Max)	900 °C
Pinch Temperature (Max)	400 °C

• Product Data

Full product code	871150041084950
Order product name	5761 30W G4 6V 1CT/10X10F
EAN/UPC - Product	8711500410849
Order code	257139
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	100
Material Nr. (12NC)	923931110103
Net Weight (Piece)	0.001 kg


PHILIPS

Dimensional drawing

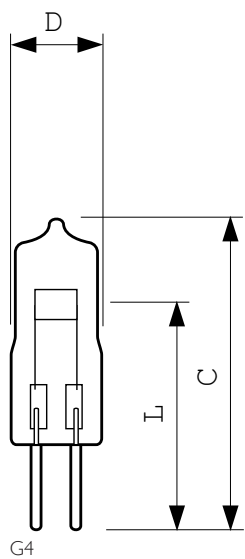

5761 30W G4 6V

Product	D	L	C
5761 30W G4 6V 1CT/10X10F	9 mm	19.75 mm	31 mm



© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 23
data subject to change